



ATTACHED TO YOUR WORLD

Flooring Products

CATALOGUE



CONTENTS

FLOORING PREPARATION & CONSTRUCTION GROUT

Ultra Level Screed C310	2
Ultra Level C500	2
Flowfill Grout GP	2
Patchfix Structural HB	2
Patchfix Fine Render	2

PRIMERS & ADDITIVES

Megalastic	3
Multiprime	3
N40 Primer	3
Ultra NP Primer	3
Ultra Prime A510	3

MOISTURE VAPOUR BARRIER

Moisture Seal Part A & B Kit	4
------------------------------	---

WATERPROOFING

Dampfix 3	4
Dampfix Gold	4
Peel N Stick	4

CEMENTITIOUS TILE ADHESIVE

Fixall	4
Superfixall	5
Megafix	5
Conflex	5
Conflex Gold	5
Superglue	5
Rapidset	6
Asaflex	6
Ultra S1	6
Ultra S	6

TIMBER FLOORING ADHESIVES

MS Flooring Adhesives

Ultraset 3 in 1	7
Ultraset HP	7

PU Timber Floor Adhesives

Ultraset SF	7
Ultraset DX	7

Approved for use with Laminex Strandfloor

Alpha Grip	7
------------	---

TILING GROUT & SILICONE


Sanded Quarry Grout	8
White Smooth Grout	8
Designer Grout	8
Kitchen & Bathroom Silicone	9

ACOUSTIC SYSTEM - TIMBER FLOORING

Acoustic Sealant	10
Ultraset SF	10
Ultraset 3 in 1	10
ASA Asaphonic Mat	10

ACOUSTIC SYSTEM - TILING

Ultraset SF	11
Asaphonic Mat	11
Dampfix Gold	11
Asaflex	11

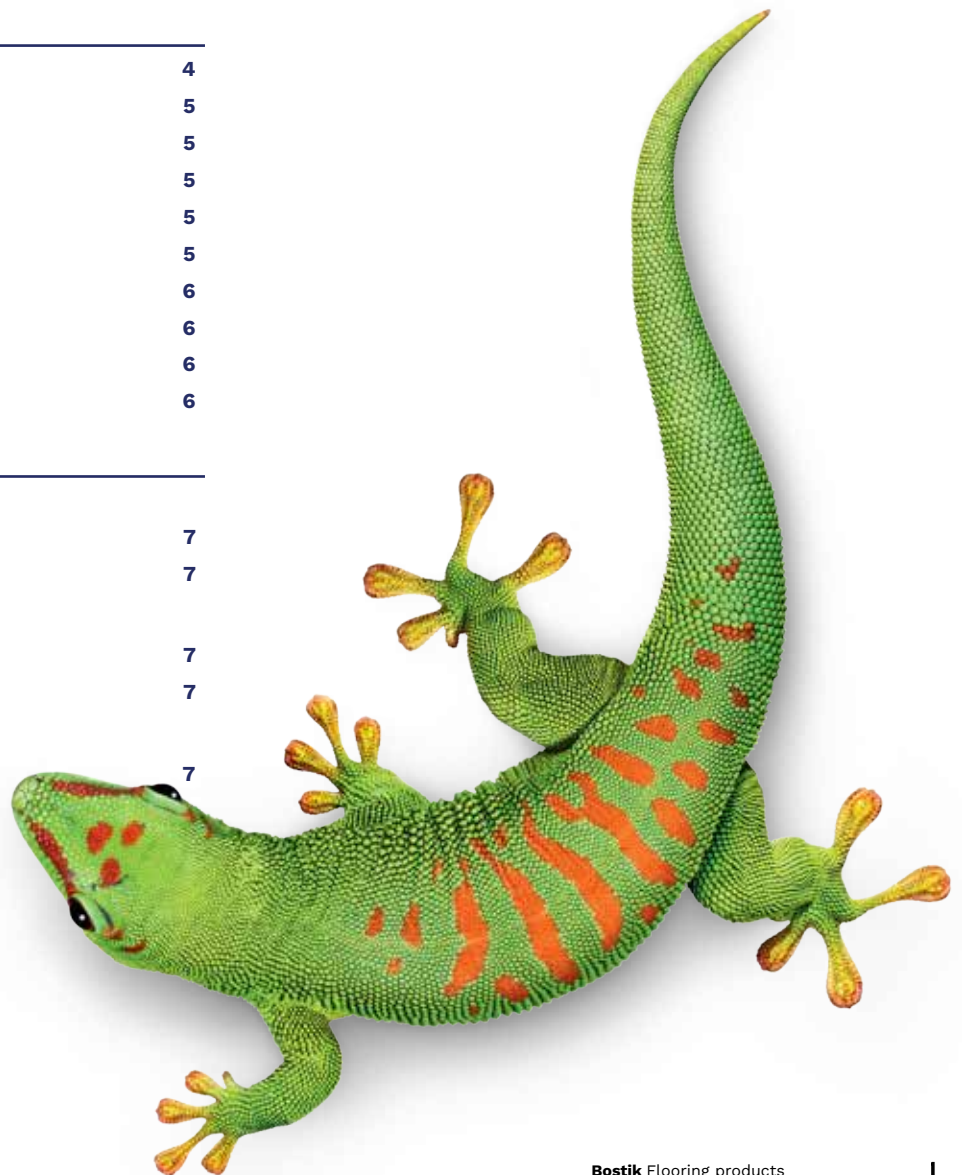

FLOORING PREPARATION & CONSTRUCTION GROUT



Ultra Level Screed C310 Screed 15-200mm

Fast setting high build modified cementitious levelling screed. Specially formulated for quick and easy application to achieve required falls without shrinkage or cracking. Replaces the need for sand and cement mixing onsite. Can be walked on after 1 hour depending on site temperature and condition. Accepts waterproofing membrane after 4 hours at 20°C. Excellent bond strength to concrete and FC sheet substrate. Suitable for external balconies or in ramp applications; wet areas where controlled falls are required; residential, commercial or medium industrial applications; in conjunction with Bostik/ASA wet area internal waterproofing membranes. Most floor coverings can be applied after 24 hours.

CODE	COLOUR	SIZE	CARTON
30616173	Grey	20kg BAG	1



Ultra Level C500 Levelling compound 0-25mm

Superior vinyl & timber underlay. Rapid hardening polymer modified cementitious underlay formulated for maximum flow without shrinkage or cracking. Very fast application, single operation and rapid curing; it accepts foot traffic in 2-3 hours. Receives vinyl and timber after 16 hours, carpet & tile after 6-8 hours. Can be applied directly onto prepared concrete surfaces. Suitable for reinstatement of new or existing concrete floors subject to foot traffic, industrial equipment, and fork lift traffic or trolleys; residential, commercial and industrial applications; heavy industrial traffic; wet areas (not immersed); with underfloor heating.

CODE	COLOUR	SIZE	CARTON
30627945	Grey	20kg BAG	1



Flowfill Grout GP Multi purpose non-shrink cementitious grout

A general purpose non-shrink (class A) cementitious grout ideal for most void-filling grouting jobs. Application thickness 20-120mm. Just add water. Depending on amount of water, can be mixed to a stiff, plastic, flowable or fluid consistency. Lower water/cement ratio reduces drying shrinkage, increases durability and reduces permeability.

CODE	COLOUR	SIZE	CARTON
30804306	Grey	20kg bag	1



Patchfix Structural HB High build structural repair reinstatement mortar

A heavy-duty, polymer-modified, high build, structural repair reinstatement mortar with high ultimate compressive strength and abrasion resistance. The product is shrinkage compensated, which allows it to be used for vertical, horizontal and overhead application for large or small repairs.

CODE	COLOUR	SIZE	CARTON
30616016	Grey	20kg bag	1



Patchfix Fine Render Single component fine fairing mortar

A polymer modified fairing mortar for applications in thin layers. It produces a natural concrete grey appearance to concrete or masonry surfaces. It can be applied from feather edge up to a maximum thickness of 5mm. It is shrinkage compensated and based on hydraulic binders and synthetic polymers.

CODE	COLOUR	SIZE	CARTON
30616017	Grey	20kg bag	1

PRIMERS & ADDITIVES



Megalastic Multi-purpose additive

A multi-purpose additive to upgrade the performance of cement based tile adhesives, grouts, screed and other similar systems. Improves adhesion, flexibility and water resistance but maintains workability, open time and pot life. Suitable for outdoors and full immersion once cured. For Increasing adhesive or grout performance; Immersed installations; general purpose additive for cement based systems.

CODE	COLOUR	SIZE	CARTON
30804112	White	1 L	1
30804111	White	5 L	1
30804113	White	20 L	1



Multiprime Porous substrate primer

General purpose primer designed for use on porous surfaces. Fully compatible with tile adhesives and most Bostik waterproofing membranes. Acrylic backbone allows it to be used outdoors. Ensure the surface to be primed is correctly installed, suitable for the intended use and adequately prepared. For use on porous surfaces such as concrete; render; fibre cement; plasterboard; autoclaved aerated concrete (AAC); timber. Multiprime is a milky pink liquid.

CODE	COLOUR	SIZE	CARTON
30804159	Pink	1 L	10
30804170	Pink	5 L	4
30804109	Pink	20 L	1



N40 Primer Non-porous surface primer/cleaner

A clear, non-staining solvent-based primer/cleaner for promoting the adhesion of polyurethane sealants, acrylic sealants and waterproof membrane systems to non-porous substrates; such as rigid plastics and most metals. Cleans and primes in one action.

CODE	COLOUR	SIZE	CARTON
30608603	Clear	1 L	12 (also sold separately)



Ultra NP Primer Two-part non-porous primer

High performance two-component primer for non-porous surfaces.

CODE	COLOUR	SIZE	CARTON
30804533	Light green (mixed)	2x 2 L kit	1



Ultra Prime A510 High performance one component primer

A high performance, one component primer for use on porous substrates. Polymer modified formula, designed for use with Bostik's Floor Levelling range.

CODE	COLOUR	SIZE	CARTON
306054243	White	5 L	1

MOISTURE VAPOUR BARRIER



Moisture Seal Part A & B Kit Epoxy water vapour barrier

Two-part water-based epoxy coating designed as a vapour barrier membrane to prevent water seepage and permeation through concrete floors. With an improved barrier rate, the product shows excellent adhesion and acts as a surface preparation for subsequent adhesives when laying floor coverings of all kinds. Tested and certified for Hydro Static Pressure.

CODE	COLOUR	SIZE	CARTON
30613027	Part A: Dark grey Part B: White	8L (2 x 4L tub)	1
30613028	Part A: Dark grey Part B: Whites	20L (2 x10L tub)	1

WATERPROOFING



Dampfix 3 Two-part water-based acrylic water proofing membrane

BRANZ Appraised, fibre-reinforced water-based acrylic modified cementitious waterproofing membrane. It is fast drying allowing for early tiling with approved adhesives. Internal and external waterproofing including immersed applications such as pools and spas. This two part formulation that is available in a 20kg liquid pail and 20kg powder pail kit.

CODE	COLOUR	SIZE	CARTON
30804119	White	20 L liquid	1
30804460	Grey	20kg powder	1



Dampfix Gold Water-based polyurethane liquid waterproofing membrane

BRANZ Appraised Dampfix® Gold is a one-part, highly elastic, Class 3, water-based polyurethane waterproofing membrane system. It is specifically formulated for application on graded substrates that provide positive falls to drainage outlets. This is a 2-coat system applied over primed porous & non-porous substrates.

CODE	COLOUR	SIZE	CARTON
30804399	Yellow	4 L pail	1
30800489	Yellow	15 L pail	1



Peel N Stick Waterproofing sheet membrane

The innovative design of the Premium Sealing membrane requires no drying and can be tiled directly after laying, reducing installation time. Suitable for indoor applications like domestic bathrooms and showers.

CODE	COLOUR	SIZE	CARTON
30620352	Grey	1000mmx10mt roll	1

CEMENTITIOUS TILE ADHESIVES



Fixall Designed for use on rigid surfaces C1

Suitable for domestic tiling. Use with Megalastic to upgrade flexibility and bond strength. For use with ceramic and domestic tiles. Suitable substrates: concrete, screed and render, wall and floor. When used with 100% Megalastic suitable substrates included: fibre cement, plaster board, Dampfix Gold, Dampfix3. Use only on moisture stable porous backed tiles only e.g. ceramic, terracotta. Use with 100% ASA Megalastic when bonding moisture stable non porous tiles such as porcelain, terrazzo, glass or stone.

CODE	COLOUR	SIZE	CARTON
30804123	Grey	20kg bag	1



Superfixall For use on rigid surfaces C1E

A rigid set, high quality cement-based adhesive suitable for most types of ceramic wall and floor tiles including monocottura, slate, terracotta, quarry tiles. ASA Superfixall is suitable for thin and thick bed applications onto rigid substrates only. To produce a resilient adhesive with improved adhesion, flexural and compressive strength mix with Megalastic as a total water replacement. RATING AS ISO 13007: C1.

CODE	COLOUR	SIZE	CARTON
30804160	Grey	20kg bag	1



Megafix White wall tile adhesive C1S1ET

A revolutionary polymer modified, white, flexible, powder adhesive recommended for internal thin bed wall and floor applications. Suitable for plasterboard, fibrous cement sheeting, cement render and concrete. Megafix is recommended for applications in bathrooms, toilets, kitchens, laundries and is suitable for most types of tiles. RATING AS ISO 13007: C1S1T.

CODE	COLOUR	SIZE	CARTON
30804161	Brilliant white	20kg bag	1



Conflex Rubber modified cement-based adhesive C2S1E

A high strength, flexible, rubber modified, cement-based adhesive used for wall and floor applications. Suitable over concrete, cement render, green screeds, existing tiles, fibrous cement sheeting, plasterboard and Bostik approved waterproofing membranes. Conflex is recommended for all internal and external applications including bathrooms, toilets, laundries, kitchens, decks and verandas. Suitable for bonding most types of tiles, including porcelain. RATING AS ISO 13007: C2S1E.

CODE	COLOUR	SIZE	CARTON
30804112	Grey	14kg bag	1
30804043	Grey	25kg bag	1



Conflex Gold Premium wall and floor adhesive C2S1ET

A premium quality product. It is a premium rubber modified tile adhesive designed for demanding or high traffic applications. Excellent all round adhesive with superb bond and overall performance. It is off-white colour. Efflorescence and Moisture Resistant. RATING AS ISO 13007: C2S1ET.

CODE	COLOUR	SIZE	CARTON
30804523	Off-white	20kg bag	1



Superglue Premium quality white cement-based adhesive CSS2EF

A highly flexible, premium quality, white cement-based adhesive developed to bond most types of ceramic tiles. Ideal for bonding monocottura and fully vitrified tiles, as well as natural stone, marble, granite and mosaic tiles (including glass) onto brickwork, existing tiles, cement render and concrete walls, floors and swimming pools. Suitable for both internal and external applications. RATING AS ISO 13007: C2S2EFT.

CODE	COLOUR	SIZE	CARTON
30604127	White	4kg tub	1
30804132	White	15kg bag	1

CEMENTITIOUS TILE ADHESIVES contd



RapidSet For commercial and high traffic tiling C2FT

A fast setting white and/or grey adhesive with long pot life, good workability and excellent strength. Commercial and high traffic tiling can be done at a normal pace but with very fast return to service. Use with Megalastic to upgrade flexibility and water resistance but maintain long open time and workability. For use with light coloured natural stone (marble). RATING AS ISO 13007: C2FT.

CODE	COLOUR	SIZE	CARTON
30804673	White	20kg	1
30603537	Grey	20kg	1



Asaflex Ceramic tile adhesive C2S2E

A two component, flexible adhesive suitable for most ceramic tile installations including tiling on timber and is also ideal for areas of movement, vibration or temperature fluctuation. Asaflex has anti-fracture properties reducing the likelihood of tile cracking due to existing cracks in the substrates. RATING AS ISO 13007: C2S2E.

CODE	COLOUR	SIZE	CARTON
30804463	White	4 L pail	1
30608706	White	15 L pail	1
30804120	Grey	8kg bag	1
30804121	Grey	30kg bag	1



Ultra S1 Tile adhesive for high traffic applications C251ET

Premium tile adhesive designed for demanding or high traffic applications for walls and floors. An excellent all-round adhesive with superb bond and overall performance. According to ISO 13007 it is classified as: C2 - Improved cementitious adhesive S1 - Flexible E - Extended Open Time T - Slip resistant

CODE	COLOUR	SIZE	CARTON
30804511	White	20kg	1
30607129	Grey	20kg	1



Ultra S Rubber-modified tile adhesive for high traffic applications C2S1E

Rubber-modified tile adhesive designed for demanding or high traffic applications. According to ISO 13007 it is classified as: C2 - Improved cementitious adhesive S1 - Flexible E - Extended Open Time

CODE	COLOUR	SIZE	CARTON
30604688	White	20kg	1

TIMBER FLOORING ADHESIVES

MS Flooring Adhesives



Ultraset 3 in 1 Advanced MS tri-linking flooring adhesive

Extremely low moisture vapour permeability. Can bridge gaps up to 3mm. Superior sound control, typically outperforming 6mm cork underlay. Includes Thickness Control Spacer Technology which maintains the adhesive thickness between flooring and substrate. Suitable for concrete, terrazzo, ceramic floor, well bonded vinyl sheets, timber, plywood and cement backer. Adheres parquet, cork, solid strip softwood, hardwood flooring, engineered and bamboo flooring.

CODE	COLOUR	SIZE	CARTON
30615274	White	26kg tub	1



Ultraset HP High performance MS polymer timber flooring adhesive (indent)

One part solvent and isocyanate-free MS polymer based elastomeric adhesive, formulated to adhere most types of timber flooring systems. Suitable for interior surfaces; residential, commercial and industrial applications. No mixing, ready to use; it is easy to spread while maintaining stable peaks. Will not re-emulsify when in contact with moisture. Remains flexible after full cure. Excellent initial grab and final bond strength. Suitable over radiant heating.

CODE	COLOUR	SIZE	CARTON
30840416	Brown	16kg tub	1

PU Timber Floor Adhesives



Ultraset SF Solvent-free hardwood adhesive for asaphonic acoustic mat

Solvent-free, polyurethane elastomeric adhesive formulated to adhere most types of hardwood floors. Suitable for adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system. Adheres parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete or timber substrates. Zero VOC, Green Build. Endorsed by ATFA.

CODE	COLOUR	SIZE	CARTON
30804431	Brown	600 mL sausage	20
30604590	Brown	16kg pail	1



Ultraset DX Quick setting polyurethane adhesive

A high-strength adhesive for bonding timber flooring to timber and concrete substrates. Single pack, semi rigid, controlled foaming, quick set, moisture cured polyurethane adhesive. When fully cured, this adhesive provides a very strong bond with excellent resistance to water. Designed for bonding porous or non-porous substrates. Expands to fill minor voids in uneven surfaces with good wet grab and initial bond. Good economical coverage up to 22m² /tub.

CODE	COLOUR	SIZE	CARTON
308404677	Brown	16kg tub	1

Approved for use with Laminex Strandfloor

Alpha Grip 1 hour cure foaming PU construction adhesive

Solvent-free, thixotropic, quick setting, moisture-cured D4 polyurethane adhesive. Alpha Grip is stronger than wood after one hour – when fully cured has an extremely strong bond with excellent resistance to water, weathering, ageing and marine conditions. Foams slightly to fill gaps and cracks. Tested and approved for use with Laminex Strandfloor. Certified to EN204 D4. Ideal for flooring and general construction and for bonding porous to non-porous substrates.

CODE	COLOUR	SIZE	CARTON
30609963	Bright Cream	310 mL cartridge	20




TILING GROUT & SILICONE



Sanded Quarry Grout Cementitious grout

A cement-based grout especially suited for wide joints from 5mm to 20mm. Exterior rated. RATING AS ISO 13007: CG2.

CODE	COLOUR	SIZE	CARTON
30804145	Grey	20kg bag	1

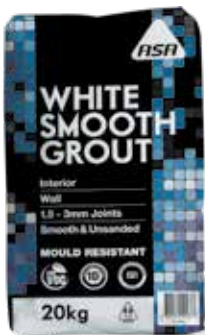

White Smooth Grout Grout

A smooth brilliant white grout. Suitable for interior wall applications with grout joints from 1.5mm-3mm. RATING AS ISO 13007: CG1.

CODE	COLOUR	SIZE	CARTON
30840383	White	4kg bag	1
30605658	White	20kg bag	1



Designer Grout Mould-resistant grout

A sterilised, mould-resistant grouting suitable for wall and floor applications with grout joints from 1.5mm to 15mm. Interior and exterior. RATING AS ISO 13007: CG2WA.

CODE	STANDARD COLOURS	SIZE	CARTON
30604379	420 Qld Grey	4kg bag	1
30604377	420 Qld Grey	20kg bag	1

CODE	ADDITIONAL COLOURS*	SIZE	CARTON
30604367	210 Antq White	4kg bag	1
30604370	220 Moleskin White	4kg bag	1
30604372	310 Buff	4kg bag	1
30604376	410 Slv Gris	4kg bag	1
30604373	410 Slv Gris	20kg bag	1
30604382	440 Dlorl Grey	4kg bag	1
30604380	440 Dlorl Grey	20kg bag	1
30604682	520 Coffee	4kg bag	1
30604386	810 Pwt	4kg bag	1
30604384	810 Pwt	20kg bag	1
30604389	820 Charcoal	4kg bag	1
30604387	820 Charcoal	20kg bag	1

*Indent only



Kitchen & Bathroom Silicone Mould-resistant, premium 100% silicone sealant

Provides a permanently flexible waterproof seal. Designed for sealing joints in wet and damp areas where resistance to the growth of mould and fungus is important. Neutral cure and non-corrosive. Ideal for kitchen and bathroom fixtures, glass, fibreglass and glazed ceramic tiles, vitreous enamel and most laminated surfaces. Also available in an acetic cure (white only).

CODE	COLOUR	SIZE	CARTON
NEUTRAL CURE			
30804716	White	300 mL cartridge	20
30804233	Translucent	300 mL cartridge	20
ACETIC CURE			
30804571	White	300 mL cartridge	20



ACOUSTIC SYSTEM - TIMBER FLOORING



Acoustic Sealant Water-based acoustic isolation sealant

Bostik Acoustic Sealant is a water-based, high solids, permanently flexible and dense sealant designed for acoustic isolation.

CODE	COLOUR	SIZE	CARTON
30804213	White	600 mL sausage	1



Ultraset SF Solvent-free hardwood adhesive

Solvent-free, polyurethane elastomeric adhesive formulated to adhere most types of hardwood floors. Suitable for adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system. Adheres parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete or timber substrate. Zero VOC. Endorsed by ATFA.

CODE	COLOUR	SIZE	CARTON
30840110	Brown	600 mL sausage	20
30604590	Brown	16kg pail	1



Ultraset 3 in 1 Advanced MS tri-linking flooring adhesive

Extremely low moisture vapour permeability. Can bridge caps up to 3mm. Superior sound control, typically outperforming 6mm cork underlay. Includes Thickness Control Spacer Technology which maintains the adhesive thickness between flooring and substrate. Suitable for concrete, terrazzo, ceramic floor, well bonded vinyl sheets, timber, plywood and cement backer. Adheres parquet, cork, solid strip softwood, hardwood flooring, engineered and bamboo flooring.

CODE	COLOUR	SIZE	CARTON
30615274	White	26kg tub	1



Asaphonic Mat Acoustic matting

Asaphonic Mat is a preformed sheet of graded rubber particles bound together by a polyurethane binder. It provides a sound absorbing layer for covering concrete floors where impact noise isolation is required. It may be used for indoor or outdoor installations. Typical applications are unit blocks (including bathrooms, laundries and living areas), external decks and balcony areas.

CODE	COLOUR	THICKNESS	CARTON
30804360	Black	5mm	1
30609001	Black	10mm	1

ACOUSTIC SYSTEM - TILING



Ultraset SF Solvent-free hardwood adhesive

Solvent-free, polyurethane elastomeric adhesive formulated to adhere most types of hardwood floors. Suitable for adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system. Adheres parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete or timber substrate. Zero VOC. Endorsed by ATFA.

CODE	COLOUR	SIZE	CARTON
30840110	Brown	600 mL sausage	20
30604590	Brown	16kg pail	1



Asaphonic Mat Acoustic matting

Asaphonic Mat is a preformed sheet of graded rubber particles bound together by a polyurethane binder. It provides a sound absorbing layer for covering concrete floors where impact noise isolation is required. It may be used for indoor or outdoor installations. Typical applications are unit blocks (including bathrooms, laundries and living areas), external decks and balcony areas.

CODE	COLOUR	THICKNESS	CARTON
30804360	Black	5mm	1
30609001	Black	10mm	1



Dampfix Gold Water-based polyurethane liquid waterproofing membrane

BRANZ Appraised Dampfix® Gold is a one-part, highly elastic, Class 3, water-based polyurethane waterproofing membrane system. It is specifically formulated for application on graded substrates that provide positive falls to drainage outlets. This is a 2-coat system applied over primed porous & non-porous substrates.

CODE	COLOUR	SIZE	CARTON
30804399	Yellow	4 L pail	1
30800489	Yellow	15 L pail	1



Asaflex Ceramic tile adhesive C2S2E

A two component, flexible adhesive suitable for most ceramic tile installations including tiling on timber and is also ideal for areas of movement, vibration or temperature fluctuation. Asaflex has anti-fracture properties reducing the likelihood of tile cracking due to existing cracks in the substrates. RATING AS ISO 13007: C2S2E.

CODE	COLOUR	SIZE	CARTON
30804463	White	4 L pail	1
30608706	White	15 L pail	1
30804120	Grey	8kg bag	1
30804121	Grey	30kg bag	1



Smart help
0508 222 272

APRIL 2024

Bostik NZ Ltd

WELLINGTON

19 Eastern Hutt Rd, Wingate 5019
Lower Hutt, New Zealand
Phone: + 64 4 567 5119
Fax: + 64 4 567 3776

AUCKLAND

148 Pavilion Drive
Airport Oaks, Auckland 2022
Phone: + 64 9 257 5847
Fax: + 64 9 257 3589

bostik.co.nz