


ATTACHED TO YOUR WORLD Industrial Adhesives

CATALOGUE



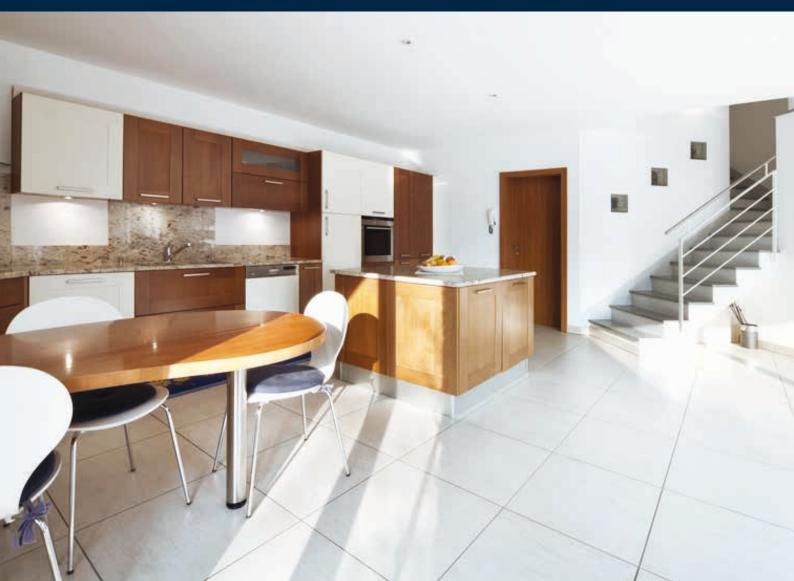

Smart adhesives are everywhere

Bostik is a leading global adhesives specialist, supplying industrial manufacturing, construction and consumer markets. Since its origins in the United States with the founding of the Boston Blacking Company in 1889 (Chelsea, Massachusetts), Bostik was built, unit by unit, business by business, on strong local culture, with each region having its own unique history.

Today, and for more than a century now, we are proud to be a global market leader with a multicultural DNA which develops innovative adhesive solutions all over the world.

Bostik is renowned for attaining the highest standards and for anticipating the requirements of its millions of loyal customers.

Willes Mars

CONTENTS

ADHESIVES

Solvent based adhesives

166 Be Be Tex		
33 LV Adhesive		
Linkbond III		

PU adhesives

Alpha Grip

AEROSOLS

Aerosol contact adhesives	
Supertak High Performance	8
Supertak HS	9
Aerosol lubricants	
Bearing Lubricant	9
Bladecote	9
Glidecote	9
CROSSLINKING AGENTS	

Boscodur No. 10 Desmodur RFE

MS RANGE

MS Safe Seal	10
MS Safe Fix	10

SEALANTS

Specialty sealants

Duct Sealer	11
Idenden 40-317	11
5612 White Butyl Sealer	11
5615 Easy Clean	12
RTV 922	12
RTV 926	12
RTV 936	12
PEF Backing Rod	13
Asbestos Encapsulation	
Indenden ET 150	13

Fire rated sealants

Fireban One Firecaulk

Silicone sealants

Roof & Gutter Silicone	14
Industrial Grade Silicone	14
Coolroom Sealant	14
V60 Silicone Sealant	14

PU sealants

7 8 8

8

10

10

13

13

PU sealants	
Seal N' Flex 1	15
Seal N' Flex FC	15
Hybrid PU sealants	
Seal N' Flex Facade	15
PU EXPANDING FOAM	
Expanda Pro Gun Foam	16
Expanda Pro Foam	16
Expanda Foam GP Expanda Gun & Foam Cleaner	17 17
	17
CLEANERS	
Clean Brake Handy Wipes	17 17
Sugar Soap	17
PRIMERS	
1000 Primer	18
N40 Primer	18
N49 Primer	18
EVA/6 Primer	18
17 Primer	18
PVC Super Wipe	19
Boscosol S Primer	19
SOLVENTS	
No. 1 Solvent	20
No. 2 Solvent No. 3 Solvent	20 20
No. 4 Solvent	20
GUNS & ACCESSORIES	
	21
Dual Purpose Cartridge & Sausage Gun HG3 Hot Melt Glue Gun	21
Hot Melt Glue Gun TG4	21
Expanda Compact Gun	21
Expanda Designer Gun	21
Sachet Pneumatic 37cm Gun	21
HOT MELTS	
TEP 950	22
6303 Hot Melt Bag Hot Melt 10 Glue Sticks	22 22
SIMSON RANGE	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Adhesives	
Simson MSR Construction Adhesive SSKF	23
Simson Panel Tack HM	23
Simson ISR 70-08 AP	23
Sealant/Adhesives	
Simson ISR 70-03	24
Simson ISR 70-05 AP	24
Sealants	
Simson MSR Deck Caulk Advanced	24
Primers	
Simson Cleaner E	25 25
Cinacon Drop M	
Simson Prep M Simson Drimor MSD	
Simson Primer MSP	26
	25 26 26 26

INDEX BY APPLICATION

FABRIC AND UPHOLSTERY APPLICATION		
1181 Brushable Contact	4	9
1181S Sprayable	4	
1222 Adhesive	4	0
2405 Adhesive	5	
Multigrass Art Grass	6	
Neogrip 888	6	I
Ultragrip 777	7	I
Unigrip 999	7	
LAMINATING APPLICATION		, ,
1456 Laminating	5	
Triple 5 BSR	5	
HP Styrene Adhesive Blue	6	(
791 Foam Adhesive Yellow	6	I
EPDM 1 Solgrip	7	
166 Be Be Tex	7	
33 LV Adhesive	8	
Supertak HS	9	
TEP 950-51	22	
JOINERY APPLICATION		
Linkbond III	8	
Alpha Grip	8	I
Bearing Lubricant	9	I
Bladecote	9	I
Glidecote	9	
Expanda Pro Gun Foam	16	I
Expanda Pro Foam	16	I
Expanda Foam GP	17	
Expanda Gun & Foam Cleaner	17	
6303 Hot Melt Glue Sticks	22	
Hot Melt Glue Sticks	22	
Simson Panel Tack	23	
ELECTRICAL APPLICATION		
Duct Sealer	11	
1 days days 40, 217	44	

MARINE APPLICATION	
MARINE APPLICATION	
Industrial Grade Silicone	14
RTV 936	12
RTV 926	12
RTV 922	12
5615 Easy Clean	12
5612 White Butyl Sealer	11
Idenden 40-317	11

Simson MSR Construction Adhesive SSKF	23
Simson MSR Deck Caulk Advanced	24

TRANSPORT APPLICATION

Simson ISR 70-08 AP Simson ISR 70-03 Simson ISR 70-05 AP	23 24 24
FIRE RATED APPLICATION	
Fireban One Firecaulk	13 13
GLAZING APPLICATION	
V60 Silicone Sealant	14
CLEANING APPLICATION	
Clean Brake	17
Handywipes	17
Sugar Soap	17
No.1Solvent	20
No. 2 Solvent	20
No. 3 Solvent	20
No. 4 Solvent	20

PRIMING APPLICATION

1000 Primer	18
N40 Primer	18
N49 Primer	18
EVA/6 Primer	18
17 Primer	18
PVC Super Wipe	19
Boscosol S Primer	19
Simson Cleaner E	25
Simson Prep M	/ 25
Simson Primer MSP	26
Simson Prep G	26
Simson Prep P	26
	2120

and some of the second second

SOLVENT BASED ADHESIVES



1181 Brushable Contact Brushable solvent-based neoprene contact adhesive

Solvent based Neoprene adhesive for excellent durability that will not stain light coloured cotton-backed PVC fabrics. Quick drying with long tack life for ease of use. Softer bond line for flexible substrates with very good heat and water resistance. Intermittent oil and petrol exposure. For use with fabrics and textiles where high durability, heat and water resistance is required. Suitable for bonding of carpet and lining fabrics, leather, furniture foam, motor and marine trim work, general assembly of wood, laminates, rubbers, cementitious materials, glass and common metals. Also suitable for light duty bonding of plasticised PVC. Not for use on polyethylene, polypropylene, Teflon, copper/brass and polystyrene foam. For thinning use Solvent No. 2 and for cleaning use Solvent No. 2 or turpentine.

CODE	COLOUR	SIZE	CARTON
30804115	Natural	1L	4
30804114	Natural	4L	2
30804116	Natural	20L	1



1181S Sprayable Contact Sprayable solvent-based neoprene contact adhesive

A neoprene sprayable adhesive for excellent durability that will not stain light coloured cotton-backed PVC fabrics. Quick drying with long tack life for ease of use. Softer bond line for flexible substrates with very good heat and water resistance. Intermittent oil and petrol exposure. For use with fabrics and textiles where high durability, heat and water resistance is required. Suitable for bonding of carpet and lining fabrics, leather, furniture foam, motor and marine trim work, general assembly of wood, laminates, rubbers, cementitious materials, glass and common metals. Also suitable for light duty bonding of plasticised PVC. Not for use on polyethylene, polypropylene, Teflon, copper/brass and polystyrene foam. For thinning, use Solvent No. 2 and for cleaning, Solvent No.2 or turpentine.

CODE	COLOUR	SIZE	CARTON
30804118	Natural	20L	1
30804117	Red	20L	1



1222 Adhesive General purpose brushable neoprene contact adhesive

Premium Neoprene based formulation for use as a general purpose brushable contact adhesive. Strong initial bond and high bond strength with excellent durability. Good heat and water resistance. Intermittent oil and petrol exposure. Excellent shoe sole attaching cement. Recommended for use on leather, rubber and EVA. Suitable for use on a wide range of substrates including giving excellent adhesion to common metals. Bonding of carpet, vinyl sheet and skirting and stair nosing. Not suitable for polyethylene, polypropylene, Teflon, plasticized PVC except for low stress bonds, copper/brass and polystyrene foam. For thinning, use Solvent No. 2 and for cleaning, use Solvent No. 2 or turpentine.

CODE	COLOUR	SIZE	CARTON
30804138	Natural	500 mL	10
30804140	Natural	1L	4
30804139	Natural	4L	2
30804141	Natural	20L	1



1456 Laminating Sprayable solvent-based neoprene laminating adhesive

1456 Laminating provides adhesive for excellent durability and is quick drying. Has strong initial grab and very good heat and water resistance. Heat reactivation and high immediate heat resistance. Intermittent oil and petrol exposure. Suitable for benchtop laminating where high heat and water resistance are required, post-forming rolled edge benchtops, motor home and marine fit-outs, heavy duty bonding of fabrics and materials. Wood, laminates, rubbers, cementitious materials, fibreglass and common metals and light duty bonding of plasticised PVC. Not suitable for polyethylene, polypropylene, Teflon, plasticised PVC except for low stress bonds, copper/brass and polystyrene foam. For thinning use Solvent No. 2 and for cleaning use Solvent No. 2 or turpentine.

CODE	COLOUR	SIZE	CARTON
30804345	Natural	20L	1
30804215	Red	20L	1
30804214	Red	210L (MTO)*	1



2405 (Part A) Adhesive Two-part neoprene blend contact adhesive with good resistance to acids and alkali

Neoprene blend contact adhesive for adhering rubber to substrates and materials. Good chemical resistance to acids and alkali. Gives greater heat resistance and stronger bond with Desmodur RFE. Resistant to oil, petrol and kerosene. Not resistant to esters, ketones, aromatic and chlorinated hydrocarbons. Good water resistance and flexible. High bond strength with good heat and humidity resistance. For thinning use Solvent No. 2 and for cleaning use Solvent No. 2 or turpentine. Suitable for use on rubberised (including Hypalon) canvas , natural and synthetic rubber, rubber to wood, metal (with Primer 17), some rigid PVC's.

Note: The adhesive will deteriorate if subjected to high temperatures and/or humidity on a continuous basis. Not suitable for: polyethylene, polypropylene, Teflon, plasticised PVC except for low stress bonds, copper/brass and polystyrene foam.

CODE	COLOUR	SIZE	CARTON
30606338	Natural	500 mL	10 (also sold separately)
30606339	Natural	4L	2
30804107	Natural	20L	1
30804315	Natural	210L (MTO)*	1



Triple 5 BSR Neoprene-based laminating adhesive

High performance neoprene-based laminating adhesive. It can be applied by brush, spray or roller. Versatile for bonding most common substrates. Can be heat reactivated. Good heat and water resistance. Intermittent oil and petrol exposure. For thinning use Solvent No. 2 and for cleaning use Solvent No. 2 or turpentine. Suitable for most laminating requirements. Bonding decorative laminates such as Formica, Laminex etc. to particleboard, benchtop laminating, general bonding for plywood, galvanized iron, wood, veneer, plasterboard. Not suitable for polyethylene, polypropylene, Teflon, plasticised PVC except for low stress bonds, copper/brass and polystyrene foam.

CODE	COLOUR	SIZE	CARTON
30804350	Red	4L	2
30804280	Natural	20L	1
30804339	Red	20L	1
30804333	Red	210L (MTO)*	1

*MTO = Made to order, 6-8 week lead time

SOLVENT BASED ADHESIVES continued



HP Styrene Adhesive Blue Synthetic rubber blend high performance sprayable contact adhesive for polystyrene

Ideal for bonding lightweight or solvent-sensitive materials. High performance, sprayable, quick initial tack, excellent green strength and good flexibility. For thinning use Solvent No. 1 and for cleaning use Solvent No.1. Suitable for bonding polystyrene foam and other lightweight materials to steel, aluminium and galvanized iron, concrete and masonry, wood and wood products, fibre cement sheet, fibreglass. Bonding polystyrene foam for the construction of prefabricated buildings, sandwich panels, coolrooms, caravans and mobile homes. Not suitable for polyethylene, polypropylene, teflon, plasticised PVC.

CODE	COLOUR	SIZE	CARTON
30804340	Green-Blue	20L	1
30804341	Green-Blue	210L (MTO)*	1

Bostik Berrantinaan akr Basta abr



Multigrass Art Grass One-way synthetic turf adhesive

Adhesive for bonding synthetic grass (Astrograss) onto concrete, timber or chip mat. Solvent-based, trowel applied, it has an exceptionally strong initial grab and good gap filling to ensure the best possible bond to all exterior surfaces. Excellent water-resistant bond which is important for outdoor applications. A one-way adhesive with high bond strength and fast tack, it has early water resistance and does not affect turf backing.

CODE	COLOUR	SIZE	CARTON
30804174	Green	20L	1

Neogrip 888 Premium neoprene-based general purpose brushable contact adhesive

Ideal for use as a general purpose, brushable contact adhesive. High viscosity for low absorption on porous substrates. Strong initial bond and high bond strength with excellent durability. Good heat and water resistance. Intermittent oil and petrol exposure. For improved resistance to solvents or oils and heat add Desmodur RFE. For thinning, use Solvent No. 2 and for cleaning, use Solvent No.2 or turpentine. Suitable for a wide range of substrates. Especially suitable for the footwear industry as it has excellent adhesion and is recommended for use on leather, rubber and EVA. Not suitable for polyethylene, polypropylene, Teflon, plasticised PVC except for low stress bonds, copper/brass and polystyrene foam.

CODE	COLOUR	SIZE	CARTON
30804331	Natural	1L	4
30804330	Natural	4L	2



791 Foam Adhesive Yellow Sprayable neoprene contact adhesive for polyurethane foam

Neoprene solvent-based sprayable contact adhesive for polyurethane foam with excellent durability. Good spray pattern with wide fan width for more coverage. Fast grab and soft bond line. 100% foam failure on bonds. No acid effect on lightweight fabrics. Fast drying with long open time. Very good heat and water resistance. Intermittent oil and petrol exposure. For thinning use Solvent No. 2 and for cleaning use Solvent No.2 or turpentine. Suitable for use on polyurethane foam and fabric bonding. Not suitable for polyethylene, polypropylene, Teflon, plasticised PVC except for low stress bonds, copper/brass and polystyrene foam.

CODE	COLOUR	SIZE	CARTON
30804318	Yellow	20L	1

*MTO = Made to order, 6-8 week lead time



Bostik

BOSTIK UNIGRIP 999 HE

Ultragrip 777 Polyurethane-based clear tough contact adhesive

Room temperature tack, colourless non-yellowing bond line, high heat resistance, excellent storage stability, superior bond to polyurethane and PVC with plasticiser resistance. Broad range of possible substrates. Modifiable with Desmodur RFE for greater heat resistance. For thinning, use Solvent No. 4 and for cleaning, use Solvent No. 4. Suitable to use with common shoe industry materials, laminating operations, soft furnishings, automotive and PVC bondings. Two-part adhesive system required for PVC where high moisture resistance is required. Not suitable for polyethylene, polypropylene, Teflon and polystyrene foam.

CODE	COLOUR	SIZE	CARTON
30804328	Clear	1L	4
30804329	Clear	4L	2
30804230	Clear	20L	1
30804304	Clear	210L (MTO)*	1

Unigrip 999 HR Heat-resistant high strength PVC adhesive

Polyurethane heat resistant high strength PVC adhesive with excellent creep resistance. Very good plasticizer resistance, low staining, excellent UV resistance and good brushability. Heat-reactivated and Desmodur RFE modifiable. Use as 1 part or 2 part, depending on performance requirements. For thinning use Solvent No. 4 and for cleaning use Solvent No. 4. Suitable for a wide range of substrates. Excellent application for the footwear industry with excellent adhesion and is recommended for use on leather, rubber and EVA. Not suitable for polyethylene, polypropylene, Teflon and polystyrene foam.

CODE	COLOUR	SIZE	CARTON
30605147	Clear	1L	4
30605144	Clear	4L	2
30804166	Clear	20L	1
30804303	Clear	210L (MTO)*	1



EPDM 1 Solgrip Synthetic rubber blend EPDM contact adhesive

Synthetic rubber blend contact adhesive for bonding EPDM. Specifically formulated with good bond strength and suitable for exterior use. For thinning, use Solvent No. 2 and for cleaning, use Solvent No. 2 or No. 3. Recommended for use in bonding EPDM rubber to itself and other common building substrates. Not suitable for polyethylene, polypropylene, Teflon, plasticised PVC, copper/brass and polystyrene foam. Service temperature: Continuous -20 to +60°C

CODE	COLOUR	SIZE	CARTON
30804265	Blue	500 mL	10

*MTO = Made to order, 6-8 week lead time

WATER BASED ADHESIVES

166 Be Be Tex Natural rubber adhesive

Bostik 166 Be Be Tex is a water-based natural rubber adhesive with high solids content and very fast bonding properties. It has high peel strength. Recommended for use on leather, cardboard, wood, fabric, felt, some synthetics, shoe, handbag, other leather and decorative industries.

CODE	COLOUR	SIZE	CARTON
30804163	Milky white	20L	1





WATER BASED ADHESIVES continued









33 LV Adhesive Water-based, high resistance to sunlight & UV radiation laminating adhesive

A non-staining, odour-free, non-hazardous laminating adhesive that develops rapid bond strength. Brush, roll or spray application. Good for most plastic films and heat or solvent reactivated. Suitable for laminating rigid or plasticised PVC to chipboard. Adhering polyurethane foam to fabrics and various plastics, and solvent-sensitive polystyrene foam to porous surfaces. Can also be used as an artwork and label adhesive. Not suitable for polyethylene, polypropylene, Teflon.

CODE	COLOUR	SIZE	CARTON
30804021	Milky white	20L	1

Linkbond III Self crosslinking D3 PVA

Bostik Linkbond III is a one-part self crosslinking PVA glue with superior heat resistance and excellent water resistance. Extremely fast grab and bond strength development. Low viscosity suits all application methods. Non-flammable and non-toxic. Responds well to RF heating and meets European exposure group BS EN 204 (D3). High solids content. Recommended for use on wood, paper, leather, cardboard, HPL flat lamination and post forming

CODE	COLOUR	SIZE	CARTON
30804040	White, dries clear	4kg	4
30804041	White, dries clear	21kg	1
30804042	White, dries clear	210kg (MTO)*	1

Solvent-free, thixotropic, quick setting, moisture-cured D4 polyurethane adhesive. Alpha Grip is stronger than wood after one hour - when fully cured has an extremely strong bond with excellent resistance to water, weathering, ageing and marine conditions. Foams slightly to fill gaps and cracks. Tested and approved for use with Laminex Strandfloor. Certified to EN204 D4. Ideal for flooring and general construction and for

SIZE

310 mL cartridge

CARTON

20

*MTO = Made to order, 6-8 week lead time

Alpha Grip 1 hour cure foaming PU construction adhesive

COLOUR

Bright Cream

PU ADHESIVES

CODE

30609963

AEROSOLS



bonding porous to non-porous substrates.



Supertak High Performance High performance aerosol adhesive

A fast tack, fast grab, low soak-in spray adhesive especially formulated to bond polyethylene to itself, concrete block, wood and many hard-to-bond surfaces. Synthetic rubber blend with good heat resistance. Go-to for all difficult substrates, temporary or permanent bonds. For cleaning, use Solvent No. 2 or No. 3. Recommended for use to bond paper, cardboard, fabric, urethane foam, foil, metal, wood and most plastics to itself and a variety of other substrates. Attaching carpet, door skins, and fabric in van conversions and bonding swimming pool liners. Bonding various plastics to each other and forming permanent bonds between porous and nonporous surfaces. Not suitable for Teflon, plasticised PVC, polystyrene foam.

CODE	COLOUR	SIZE	CARTON
30804494	Natural	23.8oz	12



Supertak HS Sprayable contact adhesive canister

Synthetic rubber blend 17 kg aerosol canister for easy spray application. High solids, good general purpose adhesive with low soak-in on porous substrates. Portable, high strength bonds, short tack time, good temperature resistance and good water resistance. For cleaning use Solvent No.2 or No.3. Recommended for fabric and textiles where high durability, heat and water resistance are required. Bonding of carpet and lining fabrics, leather, furniture foam and highly loaded fabric joints such as lifting straps. Supertak HS will bond most types of polyethylene (polythene) but a test should be carried out to confirm, as some grades contain slip agents which prevent bonding. Not suitable for polypropylene, Teflon, plasticised PVC and polystyrene foam.

CODE	COLOUR	SIZE	CARTON
30804515	Natural	17Kg canister	1
30804691	-	3.5m hose	1
30804690	-	5.5m hose	1
30804132	-	Spray gun	1

AEROSOL LUBRICANTS

Bearing Lubricant Bearing and general purpose lubricant

Significantly reduces bearing load friction and burn-out with regular maintenance using Bostik Bearing Lubricant. Reducing operating friction by 25% and lubricates under loads up to 50% greater than oil. Effective lubricant up to 550°C, it will extend bearing life by up to 3 times and can unfreeze frozen bearings. Dries quickly and will NOT gum-up, even after several applications. Silicone free, an environmentally safe aerosol with no CFCs or ODCs. Ideal for router work on all wood and solid surfaces. Also suitable to use to lubricate locks, roller, ball, wheel bearings, hinges, castors and drawer slides.

CODE	COLOUR	SIZE	CARTON
30606627	Clear	5.5oz	12



Bladecote Blade and bit lubricant

Significantly reduces cutting friction and resin or pitch buildup. Apply regularly for increased productivity and extend overall blade life by up to 3 times and reduce heat by 30 percent. BladeCote dries in seconds and will not gum-up, even after several applications. A lubricant for industrial, commercial and residential uses. Suitable to use on all blades, router and drill bits, knives, chisels, screws and nails. Use to lubricate chains, gears and pulleys.

CODE	COLOUR	SIZE	CARTON
30804586	Clear	10.75oz	12



Glidecote Table and tool surface sealant

Regular maintenance of saw tables and receiving tables with GlideCote[™] significantly reduces sliding friction on all metal, laminate, and plastic surfaces. Recommended for use for table saw beds, drill presses, lathes, planers, band saws, miters, panel saws, and all hand tools. Eliminates "hang-ups" on sliding surfaces. Will not build-up even after several applications and will not stain or affect finishing of wood. Contains no petroleum oils or silicone. Protects all tools and equipment from rust. Up to 30% slicker than paste wax. Easier and quicker to apply than paste wax. Lasts three times longer than paste wax.

CODE	COLOUR	SIZE	CARTON
30603712	Clear	10.75oz	12





Boscodur No. 10 General purpose crosslinker for contact adhesives

Bostik Boscodur No. 10 is a general purpose crosslinker with improved adhesion values, heat resistance and low usage levels. Recommended for use as crosslinking agent for polyurethane, nitrile and polychloroprene adhesives.

CODE	COLOUR	SIZE	CARTON
30804143	Dark Brown	500 mL	10 (also sold separately)

Desmodur RFE Polyisocyanate crosslinking agent

Desmodur RFE polyisocyanate is a solution of tris (p-isocyanatophenyl) thiophosphate in ethyl acetate. Desmodur RFE polyisocyanate is a highly effective crosslinker for adhesives based on polyurethane, natural rubber or synthetic rubber. Desmodur RFE polyisocyanate is also useful for improving adhesion to rubber-based materials.

CODE	COLOUR	SIZE	CARTON
30604139	Brown	50 mL	105 (also sold separately)
30804298	Brown	750 mL	20 (also sold separately)

MS RANGE



MS Safe Seal Solvent-free, high performance MS construction sealant

BRANZ Appraisal 705, this is a high performance, heavy duty, MS-based construction sealant that is fully paintable. Solvent-free, highly elasticity and flexible, and sticks to most surfaces. Ideal for sealing construction joints, building and expansion joints. Primer: Prep M for non-porous and metal substrates, Prep P for porous substrates.

CODE	COLOUR	SIZE	CARTON
30605491	White	300 mL cartridge	12
30605492	Grey	300 mL cartridge	12
30605493	Black	300 mL cartridge	12
30804179	White	600 mL sausage	12
30804013	Grey	600 mL sausage	12
30804011	Black	600 mL sausage	12



MS Safe Fix Solvent-free, high performance MS construction adhesive

BRANZ Appraisal 662, multi-purpose, heavy duty, MS-based adhesive for construction and building. Elastically seals most building materials and surfaces. Green Star compliant, it is ideal for green builds – low VOC, odour-free and solvent, silicone and isocyanate-free. Exceptionally high initial grab, adheres to common building substrates and solvent sensitive substrates such as mirrors and polystyrene.

CODE	COLOUR	SIZE	CARTON
30605494	White	300 mL cartridge	12



SPECIALTY SEALANTS

Duct Sealer Fast drying non-slump sealer

A non slump, fast drying adhesive/sealer. Once fully dried, Duct Sealer remains fully flexible, performing over a wide temperature range on both internal and external surfaces. It is paintable and bonds well to most commonly found construction surfaces such as galvanised steel and other metals, wood, and concrete. Recommended for use in sealing lap joints in heating and air conditioning ducting, sealing roofing joints. Automotive applications such as internal seam repairs on cars, buses, caravan and trailer bodies. Bonds well to metals including galvanized iron and ducting foil. Also bonds to wood and concrete.

CODE	COLOUR	SIZE	CARTON
30804300	Grey	375 mL cartridge	20

Idenden 40-317 High velocity acrylic duct sealant

Bostik 40-317 high velocity acrylic duct sealant forms a tough, yet flexible seal, which prevents loss of internal pressure without the necessity of additional tape. It is both waterproof and flame retardant and has excellent adhesion to metal surfaces. Designed for use on both low and high velocity heating and air conditioning ducts.

CODE	COLOUR	SIZE	CARTON
30601510	Grey	280 mL cartridge	12

5612 White Butyl Sealer Non skinning butyl mastic sealant

Specifically formulated as a bedding or gasket style sealant. It remains in a soft plastic state providing a dustproof, weatherproof and flexible seal in a variety of construction and manufacturing materials. Recommended for use in coolroom wall component sealing. Sea container metal to metal lap joints. Air conditioning flange joint sealing. Glazing seal. Bedding or internal sealing of construction fitting such as aluminium windows or flashing.

CODE	COLOUR	SIZE	CARTON
30804526	White	450g cartridge	10



SPECIALTY SEALANTS continued

5615 Easy Clean Self-skinning mastic sealer

Bostik 5615 is a synthetic rubber mastic compound, which has been specifically formulated to remain permanently flexible in use. Excellent UV light resistance in glazing applications. Tenacious adhesion to nearly all surfaces with good service temperature range (-35°C to 65°C). Minimal swell effect on rubber and self skinning. It is predominantly used in the automotive aftermarket area for secondary sealing of windscreens where a durable, skinning product is required. Recommended for use in sealing of rubber gasket type windscreens and spot weld sealing.

CODE	COLOUR	SIZE	CARTON
30804610	Black	520g cartridge	10

RTV 922 High performance industrial silicone sealant

Acetic cure, 100% silicone rubber. Won't slump, sag or run off surfaces. Excellent working temperature range: -50 to 235°C. Good resistance to weathering, moisture, motor oils and some chemicals. Adheres to a variety of substrates. Meets the requirements of many industrial, mining and OEM applications. Ideal for sealing windows in oven doors (subject to temperature range of oven), sealing access doors on gas appliances, sealing gaskets in heating and refrigeration units, bonding and sealing appliance parts, industrial, mining and automotive maintenance and more.

CODE	COLOUR	SIZE	CARTON
30804656	Black	300g cartridge	15
30804651	White	300g cartridge	15
30804659	Clear	300g cartridge	15



RTV 926 High performance industrial silicone sealant

Neutral cure, 100% silicone rubber. Won't slump, sag or run off surfaces. Excellent electrical insulation properties. Excellent working temperature range: -50 to 205°C. Good resistance to weathering, moisture, motor oils and some chemicals. Good adhesion to metal, aluminium, wood, some rubber and plastics. Non-corrosive sealant (for copper use RTV 928). Meets the requirements of many industrial, mining and OEM applications. Makes formed-in-place gaskets for ducting, whitegoods, electrical sealing, sealing of manhole covers, water tank and industrial piping. Seals gaskets in heating and refrigeration units, bonds and seals appliance parts, ideal for industrial, mining, automotive, marine and general maintenance applications and more.

CODE	COLOUR	SIZE	CARTON
30804650	Black	300g cartridge	15
30804665	White	300g cartridge	15
30804649	Clear	300g cartridge	15

RTV 936 High temperature industrial silicone sealant

High-temperature, acetic cure 100% silicone rubber. Won't slump, sag or run off surfaces. Excellent electrical insulation properties. Excellent working temperature range: -60 to 275°C. Good resistance to weathering, moisture, motor oils and some chemicals. Adheres to a variety of substrates. Meets the requirements of many industrial, mining and OEM applications. Ideal for industrial applications where high heat resistance is required, including industrial ovens and boilers, domestic cookers and ovens, flues on gas appliances, household electrical and industrial heating equipment, smoke stacks, moving oven belts, and for sealing and encapsulating heating elements in appliances.

CODE	COLOUR	SIZE	CARTON
30804666	Red	300g cartridge	15







PEF Backing Rod Closed cell PEF rod

Closed cell, low density polyethylene foam, designed for use as a backing material in construction joints before the application of sealants. Good expansion recovery for a perfect fit with no water absorption. Light weight and easy to install.

CODE	COLOUR	SIZE	CARTON
30607800	White	6mm	20M
30607801	White	6mm	50M
30607802	White	10mm	20M
30607803	White	10mm	50M
30607804	White	13mm	20M
30607805	White	13mm	50M
30607806	White	15mm	20M
30607807	White	15mm	50M
30607808	White	20mm	20M
30607810	White	25mm	10M
30607811	White	30mm	10M

CODE	COLOUR	SIZE	BAG
30612873	White	6mm	250M
30612949	White	8mm	250M
30612950	White	10mm	200M
30612862	White	13mm	100M
30612861	White	15mm	100M
30612860	White	20mm	60M
30612858	White	25mm	50M
30612857	White	30mm	50M
30611383	White	50mm	20M

ASBESTOS ENCAPSULATION

Indenden ET 150 Sprayable asbestos encapsulation

ET-150 is easily applied by spray or brush to provide a durable and flexible, water-resistant finish over a wide service temperature range. Suitable for asbestos removal or in-situe encapsulation.

CODE	COLOUR	SIZE	CARTON
30811810	Grey	10L	1

FIRE RATED SEALANTS



Fireban One Fire and acoustic rated polyurethane construction sealant

Fire and acoustic rated, intumescent, low modulus, Class A Polyurethane. For fire rating of jointings of concrete, precast panels, block and brick work, drywall systems, electrical cables and pipe penetrations, in conjunction with other systems such as fire collars, pillows, board systems and fire rated mortars. Fire rated for up to 4 hours, it is suitable for interior and exterior surfaces, and retains it s original properties even after years of weather and UV exposure. Approved for use in many GIB® acoustic systems (refer to document Lt001 2012071A MJC Acoustic Sealant Opinions).

CODE	COLOUR	SIZE	CARTON
30606866	Grey	600 mL sausage	20

Firecaulk Intumescent fire rated and acoustic sealant

Fire and acoustic rated intumescent acrylic sealant. Fire Rating for jointing of concrete, precast panels, block and brick work, drywall systems, electrical cables and pipe penetrations. In conjunction with other systems such as fire collars, pillows, board systems and fire-rated mortars. Provides a fire barrier for up to 4 hours, helping to prevent the spread of fire, smoke through walls and floors and prevents passage of hot gases. Fire resistant to AS1530.4 and AS4072.1, and fire rated for gaps up to 40mm. Approved for use in many GIB® acoustic systems.

CODE	COLOUR	SIZE	CARTON
30804258	Beige	300 mL cartridge	20
30804045	Beige	600 mL sausage	20



SILICONE SEALANTS

Roof & Gutter Silicone Weatherproof, premium 100% silicone sealant

Premium, waterproof, weatherproof, permanently flexible translucent sealant with excellent adhesion to common construction materials and metals. Neutral cure and is ideal for green builds. Excellent adhesion, it stays permanently flexible – joint movement capability of ±25%. It will not corrode bare metal and is Ideal for metal roofing systems, plumbing applications, air conditioning ducting and sheet metal fabrications, flashings and downpipes, skylights and extraction units, pipe or sprinkler system penetrations.

CODE	COLOUR	SIZE	CARTON
30804193	Clear	300 mL cartridge	20
30804566	Clear	600 mL sausage	20

Industrial Grade Silicone Industrial grade, premium 100% silicone sealant

This neutral cure, flexible, silicone sealant is designed for sealing lap joints in metal guttering, aluminium roofing, flashings and downpipes. Suitable for indoor and outdoor applications with excellent UV and weather resistance. Suitable for general construction and marine environments. Back glazing, perimeter and air seals.

CODE	COLOUR	SIZE	CARTON
30804310	White	300 mL cartridge	20
30804541	Grey	300 mL cartridge	20
30804311	Clear	300 mL cartridge	20

Coolroom Sealant Neutral cure industrial silicone sealant

Low modulus, neutral cure, flexible, 100% silicone joint sealant. Resistant to mould and fungi, it is ideal for wet areas. Suitable for sealing expansion joints in cool stores, refrigerated rooms and food processing areas. Certified by NZ Food Safety Authority for use in premises processing all animal products except dairy (approved C82). Low VOC, suitable for Green Builds.

CODE	COLOUR	SIZE	CARTON
30804540	Titania	400g cartridge	20
30804566	Clear	600 mL sausage	20



V60 Silicone Sealant Architectural grade waterproofing silicone sealant

Premium grade neutral cure glazing weatherproofing silicone sealant. Superior adhesion to aluminium and glass has made V60 Architectural Grade Silicone a market leader in the glass market for 15 years. It has U.V. and weather stability, maintaining reliable flexible and durable elastomeric sealant by absorbing atmospheric moisture as it cures. It is suitable for all types of glazing and waterproofing. Bostik V60 Silicone Glazing Sealant meets or exceeds the requirements of the following specification for a one-part sealant. AS-1288-2006 ASTM C1184, Type S, Use G and O. C920: Type S Grade NS, Class 35, Use NT, A, G, O. GB – 16776 Meets Low VOC Rating-47g/L (SCAQMD) AS/NZS4020-2005 – Drink water approved AWQC (Translucent only).

CODE	COLOUR	SIZE	CARTON
30804555	Black	300g cartridge	15
30804561	Translucent	300g cartridge	15



PU SEALANTS





Low modulus, polyurethane sealant. When cured, forms a tough, flexible seal and bond capable of cyclic expansion and compression movement of up to 100% (+ 50%) of the original installed joint width. Paintable, acoustic rated and durable to harsh weather conditions. Specified adhesive/sealant for James Hardie Systems. Suitable for use for heavy commercial applications and substrates including metals, glass, concrete, brick, wood, plasterboard, marble, granite, sandstone, plasterboard face and paper-lined recessed edges and GRC. Conforms to ISO11600-F-25-LM. MPI approved for use in farm dairies.

CODE	COLOUR	SIZE	CARTON
30840067	White	300 mL cartridge	20
30803243	Grey	300 mL cartridge	20
30804581	Black	300 mL cartridge	20
30840033	White	600 mL sausage	20
30840036	Black	600 mL sausage	20
30840034	Grey	600 mL sausage	20

Seal N' Flex FC Fast cure, polyurethane construction joint sealant

Trafficable medium/high modulus, Class-A polyurethane sealant. Suitable for vehicle and pedestrian traffic areas, and chemical areas. High performance, high bond strength and fast cure. When cured, forms a tough and permanently elastic seal capable of cyclic, expansion and compression movement of up to 50% (+/- 25%) of original joint width. Paintable, and durable to harsh weather. Suitable for building and construction applications with common building substrates and for heavy commercial applications.

CODE	COLOUR	SIZE	CARTON
30840076	White	300 mL cartridge	20
30840073	Grey	300 mL cartridge	20
30840075	Black	300 mL cartridge	20
30803687	White	600 mL sausage	20
30840072	Grey	600 mL sausage	20
30800512	Black	600 mL sausage	20

HYBRID PU SEALANTS

Real Property in the second se

Seal N' Flex Facade Low modulus, hybrid polyurethane facade sealant

BRANZ appraised and passed Assure Quality Assessment, professional quality, high performance, low VOC, weather resistant expansion sealant for building facade construction joints. Based on the latest hybrid polyurethane technology, this universal low modulus formula is designed to cure under the influence of humidity to form a durable elastic rubber seal. Excellent adhesion without primer to most, even damps surfaces. Permanently elastic with +/- 25% joint movement. Does not form bubbles while curing. Excellent resistance to UV, water and weather. Enhanced performance in extreme temperatures with superior tooling capabilities. Available in sausage and cartridge.

CODE	COLOUR	SIZE	CARTON
30615639	White	300 mL cartridge	20
30615635	Grey	300 mL cartridge	20
30615636	Black	300 mL cartridge	20
30615640	White	600 mL sausage	20
30615638	Grey	600 mL sausage	20
30615637	Black	600 mL sausage	20



Expanda Pro Gun Foam High yield, low expansion PU expanding foam


BRANZ Appraised, this is a professional grade, one-component, gun-applied, self-expanding PU foam. Very high yield (up to 50L) and low post-expansion in one product. Seals, fills cavities, minimises sound, provides air seal, eliminates draughts. Ideal for sealing around windows, door frames, sealing roof openings, air conditioning vents etc. Excellent adhesion to most substrates.

CODE	COLOUR	SIZE	CARTON
30605417	Champagne	750 mL	12

Expanda Pro Foam High yield, low expansion, PU expanding foam

BRANZ Appraised, this is a professional grade, one-component, ready-to-use, self-expanding PU foam. Very high yield (up to 45L) and low post-expansion in one product. Product can be applied at any angle. Seals, fills cavities, minimises sound, provides air seal, eliminates draughts. Ideal for sealing around windows, door frames, sealing roof openings, air conditioning vents etc. Excellent adhesion to most substrates.

CODE	COLOUR	SIZE	CARTON
30605418	Red	750 mL	12

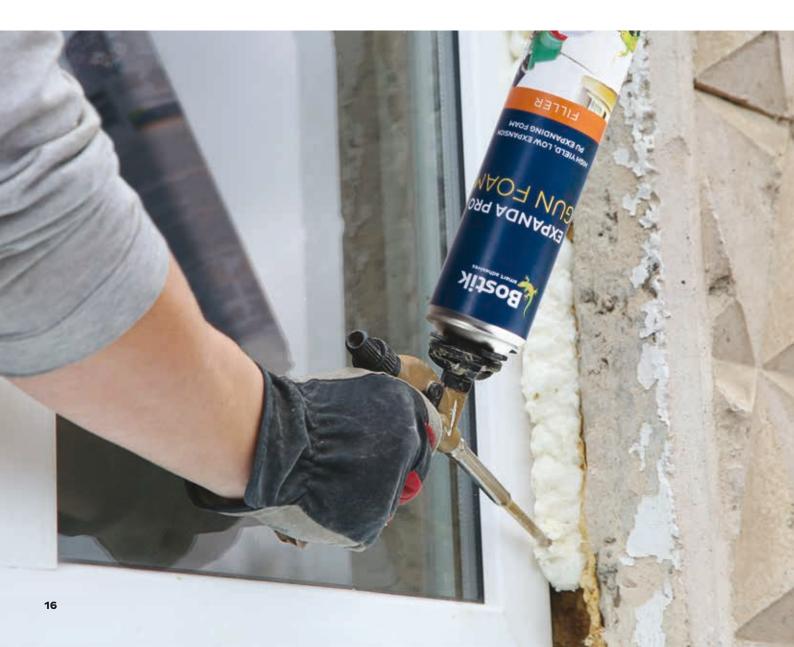



Expanda Foam GP General purpose PU expanding foam

General purpose, one component, ready-to-use, self expanding PU foam. Reusable – insert nozzle into plug to maximise product life once opened. Seals, fills cavities, minimises sound, provides air seal, eliminates draughts, seals windows and door frames. Excellent adhesion to most substrates.

CODE	COLOUR	SIZE	CARTON
30605419	Champagne	500 mL	12

Expanda Gun & Foam Cleaner Ready-to-use cleaner for Expanda Gun & uncured foam

Ready to use cleaning fluid for use on Bostik Expanda Guns and Aerosol Foams. Cleans aerosol valve and nozzles, removing uncured foam to ensure optimum function and prevent blockages.

CODE	COLOUR	SIZE	CARTON
30605420	Clear	500 mL	12

CLEANERS



Clean Brake Heavy duty cleaner

Cleans disc brakes to prevent brake noise caused by contamination or to stop clutch slipping. A general purpose degreaser for automotive workshops, suitable for mechanical and industrial cleaning and degreasing operations. A no residue, balanced evaporation for optimum cleaning and shortest drying time. Made in New Zealand.

CODE	COLOUR	SIZE	CARTON
30610669	Colourless	500 mL	12
30607923	Colourless	20L	1



Handy Wipes Extra large wipes with scrub side

Waterless extra large wipes hand towels with a convenient scrub side for removing tough grime and the other side for gentle wiping. Cuts through grease, tar, uncured adhesive, lubricants, ink and paint. Won't scratch or mark. Soft on hands, kind to skin.

CODE	COLOUR	SIZE	CARTON
30603766	Clear liquid on purple textured towels	70 sheets per tub	6



A concentrated, heavy duty, all purpose cleaner. One litre makes 80 litres. Ideal for removing grease, grime, mould, smoke stains and wallpaper residue from walls and ceilings prior to painting. Master Painters NZ approved. Made in NZ.

CODE	COLOUR	SIZE	CARTON
30804531	Clear	1L	6
30804544	Clear	5L	4





1000 Primer Primer for polychoroprene contact adhesives

1000 Primer is neoprene solvent-based, thin, brushable or sprayable liquid primer which can be easily and quickly applied to reinforce the bonding surface on absorbent materials, such as wood, concrete, cement board etc. before applying Bostik Neoprene contact adhesives. Recommended for use on priming porous substrates such as wood, concrete and cement board prior to applying Bostik neoprene contact adhesives.

CODE	COLOUR	SIZE	CARTON
30804155	Natural	4L	2 (also sold separately)
30804156	Natural	20L	1



N40 Primer Non-porous surface primer/cleaner

A clear, non-staining solvent-based and fast drying primer/cleaner for promoting the adhesion of polyurethane sealants and waterproof membrane systems to non-porous substrates such as rigid plastics and most metals. Cleans and primes surfaces in one action.

CODE	COLOUR	SIZE	CARTON
30608603	Clear	1L	12 (also sold separately)

N49 Primer Porous substrate primer for polyurethane sealant systems

Prepares porous substrates to improve adhesion and longevity of the sealant. Primer for concrete, masonry and unglazed ceramic tiles. Primer on porous substrates only are: Seal N Flex 1, Seal N Flex FC, Seal N Flex PR and Fireban One.

CODE	COLOUR	SIZE	CARTON
30608602	Clear	1L	12 (also sold separately)



EVA/6 Primer EVA foam primer for contact adhesives

Bostik EVA/6 Primer enhances adhesion for Bostik contact adhesives to EVA surfaces. Improves the bond strength on EVA foam with contact adhesives such as Neogrip 888, 1222, 1181 and Unigrip 999 HR. For use on slit or roughed EVA soling materials.

CODE	COLOUR	SIZE	CARTON
30804348	Natural	20L	1



17 Primer Steel primer for polychoroprene contact adhesives

Bostik 17 Primer is for interior and exterior use, has excellent water resistance, improves adhesion and enables quick application. Adhesion promoter for steel when using polychloroprene contact adhesives.

CODE	COLOUR	SIZE	CARTON
30804157	Brown	4L	2 (also sold separately)







Bostik

3506. S PRIM

PVC Super Wipe Solvent-based cleaner and primer

A cleaner and primer for flexible PVC and polyurethanes. It is especially suitable for PVC shoe soles. A strong, fast drying solvent, it can be used to make PVC polymer solutions from solid PVC flooring compounds for PVC joint sealant.

CODE	COLOUR	SIZE	CARTON
30804131	Colourless	4L	2

Boscosol S Primer Two-part halogenation primer for rubber

Bostik Boscosol S Primer is a two-part halogenation primer for vulcanised and thermoplastic rubber when using Bostik contact adhesives. It has improved adhesion to rubber, reduces manual surface preparation of rubber surfaces and gives tough but flexible surface for strong bonds.

CODE	COLOUR	SIZE	CARTON
30603579	Part A - Clear Part B - White powder	1L plastic jerry can with 20g bottle	3





No. 1 Solvent Solvent cleaner/thinner

Very mild low odour solvent for situations including polystyrene, or where stains need to be removed from very sensitive plastic surfaces.

CODE	COLOUR	SIZE	CARTON
30804146	Colourless	4L	2



No. 2 Solvent Solvent cleaner/thinner

Strong solvent used to thin most contact adhesives, clean brushes or washout spray equipment. Reactivates neoprene contact adhesives.

CODE	COLOUR	SIZE	CARTON
30804148	Colourless	1L	4
30804147	Colourless	4L	2
30804149	Colourless	20L	1



No. 3 Solvent Solvent cleaner/thinner

Fast drying general purpose, medium strength solvent. Degreasing and cleaning for metals and rubber surfaces. Free from oil and contaminants.

CODE	COLOUR	SIZE	CARTON
30804150	Colourless	4L	2
30804151	Colourless	20L	1



No. 4 Solvent Solvent cleaner/thinner

Strong solvent used mainly to thin or reactivate urethane or nitrile based adhesives. Can be used to remove dried adhesives from a variety of surfaces. PVC cleaner prior to cementing. Thinner where recommended.

CODE	COLOUR	SIZE	CARTON
30804153	Colourless	1L	4
30804152	Colourless	4L	2
30804154	Colourless	20L	1





HG3 Hot Melt Glue Gun Electrically operated applicator

Lightweight, easy to use, trigger-action glue gun for dispensing hot melt glue. The HG3 Glue Gun is designed for DIY tasks, household repairs, Hobby, Craft work, Home decor projects, instantly bonds most craft and household materials including – fabric, wood, leather, most plastics, ceramics and metal. Not suitable for continuous use.

CODE	COLOUR	SIZE	CARTON
30611356	-	One size	12 (also sold separately)



Hot Melt Glue Gun TG4 Heavy duty electrically operated applicator

Bostik TG4 Hot Melt Glue Gun is an electrically operated applicator designed to dispense hot melt glue to bond most materials quickly and efficiently. It has given secure, long lasting and cost-effective bonding in many industrial applications in packaging, product assembly, furniture and other allied industries. Recommended for use in industrial applications.

CODE	COLOUR	SIZE	CARTON
30804478	-	One size	4 (also sold separately)

Dual Purpose Cartridge & Sausage Gun Dual purpose aluminium applicator gun

Dual purpose barrel gun for the easy application of Bostik sausage and cartridge products.

CODE	COLOUR	SIZE	CARTON
30804365	-	One size	10 (also sold separately)



Expanda Compact Gun Economical foam gun

This gun is suitable for use on gun grade Expanda foams. Sourced from Europe.

CODE	COLOUR	SIZE	CARTON
30605421	-	One size	12 (also sold separately)



Expanda Designer Gun High quality foam gun

Bostik Expanda Designer Gun is a high quality gun for professional use. For use on Bostik Expanda Pro Gun Foams.

CODE	COLOUR	SIZE	CARTON
30605422	-	One size	40 (also sold separately)



Sachet Pneumatic 37cm Gun

Aluminium pneumatic gun for use with sausages. Reduces user fatigue.

CODE	COLOUR	SIZE	CARTON
30804363	-	One size	1



TEP 950 -51 Diaper and mattress construction hot melt adhesive

Bostik TEP 950-51 gives excellent adhesion to PE, no-wovens, polyether and polyester and foam mattress. Recommended for use in diaper construction and manufacture of mattresses and bedding.

CODE	COLOUR	SIZE	CARTON
30602877	Light Amber	1kg	24



6303 Hot Melt Glue Sticks Hot melt adhesive sticks

Bostik 6303 is a general-purpose hot melt adhesive displaying good adhesion to a wide variety of substrates. It is supplied in 12mm diameter sticks suitable for use in Bostik HG3 and TG4 Hot Melt Glue Guns. Recommended for use in case and carton sealing and craft applications.

CODE	COLOUR	SIZE	CARTON
30804592	Pale Yellow/ Translucent	12mm diameter sticks in 15kg bag	Pack of 400



Hot Melt Glue Sticks Hot melt adhesive sticks

Hot melt glue sticks are suitable for use in HG3 Hot Melt Glue Gun. Once heated and gunned out, it provides instant adhesion. Adhesive is clear and flexible when dry. Fast, clean, versatile, non-toxic, no fumes, with high strength bond and very low odour. There is no wastage as it is a solid adhesive and has a long shelf life. Adheres to most craft and household materials including fabric, wood, leather, most plastics, ceramics and metal. Recommended for use in DIY tasks, household repairs, hobby, craftwork and home decor projects.

CODE	COLOUR	SIZE	CARTON
30611355	Translucent	Pack of 10	10



ADHESIVES

State of the second sec

Simson MSR Construction Adhesive SSKF Silyl Modified Polymer

Bostik Simson MSR Construction Adhesive SSKF is a 1-component, permanently elastic, fast curing construction adhesive, based on Silyl Modified Polymer (SMP). It is the longer open time version of the MSR Construction Adhesive. This product has been developed for bonding and sealing applications in the yacht and boatbuilding industry. MSR Construction Adhesive SSKF has been tested and certified to the International Maritime Organisation Fire Test Procedures for Surface Flammability, resolution A.653(16) and has been approved for use in wall, ceiling and floor applications. Recommended for use in bondings and sealings in nautical applications, where adhesion and deformability have to comply with extreme requirements. Typical applications include bonding push borders, bonding and sealing deck fittings, bonding deck coverings, bonding sheets, bonding and sealing deck/hull connections, deck hatches and portholes. As bedding compound whenever a higher initial strength is required.

CODE	COLOUR	SIZE	CARTON
30131950	White	290 mL cartridge	12
30131960	Grey	290 mL cartridge	12
30131970	Black	290 mL cartridge	12
30133090	Black	600 mL sausage	12

Simson Panel Tack Solvent-free, high modulus panel adhesive

Bostik Simson PanelTack HM ('High Modulus') is a moisture-curing, elastic adhesive, based on SMP, specially developed for bonding exterior flat façade panels like fibre cement cladding panels and durable plywood panels. Solvent- and isocyanate-free with excellent mechanical strength. Long term high elasticity with optimum distribution of strain. Good moisture and weather resistance. Simple and fast fixation. One bonding system for both interior and exterior applications. Recommended for use in mounting of exterior façade panels used for exterior wall cladding, roof trims, parapets, etc.

CODE	COLOUR	SIZE	CARTON
30132201	Black	290 mL cartridge	12
30132181	Black	600 mL sausage	12

Simson ISR 70-08 AP Silyl Modified Polymer

Simson ISR 70-08 AP is an excellent quality elastic adhesive based on Silyl Modified Polymers (SMP). It is suitable for bonding windows (e.g. cars, buses and trains) or other industrial applications which require high green strength (initial tack) to avoid or reduce clamping times. It can also be used for sealing applications. Simson ISR 70-08 AP is tested according to DIN6701, has excellent resistance to UV, weather and temperature and is free of solvents, isocyanates and silicone. It exhibits excellent adhesion performance on a wide variety of substrates (minimal or no pre-treatment necessary) and can be over-painted with common industrial paints.

CODE	COLOUR	SIZE	CARTON
30600958	Black	290 mL cartridge	12
30600956	Black	600 mL sausage	12



SEALANT / ADHESIVES





Simson ISR 70-03 is a high quality elastic sealant/adhesive based on Silyl Modified Polymers (SMP). It is suitable as adhesive or sealant for structures in industrial applications requiring high strength. Excellent resistance to UV, weather and temperature and is free of solvents, isocyanates and silicone. It exhibits excellent adhesion performance on a wide variety of substrates (minimal or no pre-treatment necessary) and can be overpainted with common industrial paints.

CODE	COLOUR	SIZE	CARTON
30132121	White	290 mL cartridge	12
30132150	Grey	290mL cartridge	12
30132171	Black	290 mL cartridge	12
30132131	White	600 mL sausage	12
30132160	Grey	600 mL sausage	12
30132180	Black	600 mL sausage	12



Simson ISR 70-05 AP Silyl Modified Polymer

Simson ISR 70-05 AP is a high quality elastic adhesive based on Silyl Modified Polymer (SMP). It has a good initial tack and a high mechanical strength. It is suitable as adhesive for structures in industrial applications requiring high strength. Can also be used for sealing applications. Simson ISR 70-05 AP has excellent resistance to UV, weather and temperature and is free of any solvent, isocyanate and silicone. It exhibits excellent adhesion performance on a wide variety of substrates (minimal or no pre-treatment necessary) and can be over-painted with common industrial paints.

CODE	COLOUR	SIZE	CARTON
30600968	Black	290 mL cartridge	12
30607437	Oak	600 mL sausage	12
30605335	Grey	600 mL sausage	12
30802037	Black	600 mL sausage	12



Simson MSR Deck Caulk Advanced Silyl Modified Polymer

Simson MSR Deck Caulk Advanced is a one-component, permanently elastic, fast curing sealant, based on Silyl Modified Polymer (SMP). Solvent and isocyanate-free. Very good UV resistance and ageing properties; long time resistance against fresh and salt water. Permanently elastic in a temperature range of -40°C to +100°C. Neutral, odourless and fast curing. Can be sanded after curing and has high chemical resistance. Recommended for use in watertight sealing of seams in teak decks and other decking materials.

CODE	COLOUR	SIZE	CARTON
30131950	Black	290 mL cartridge	12
30604732	Black	600 mL sausage	12

PRIMERS



Simson Cleaner E Cleaner and degreaser

Bostik Simson Cleaner E is a preparation agent, ideally suitable for cleaning and degreasing substrates for bonding or sealing with specific Simson products. Recommended for use as cleaning and degreasing joints in teakwood decks (prior to the application of Simson Primer P). Removing uncured sealant and adhesive, based on Silyl Modified Polymer (SMP), silicones, polysulphide and polyurethane from substrates and tools. Degreasing and cleaning glass substrates.

CODE	COLOUR	SIZE	CARTON
30804188	Clear	500 mL	10 (also sold separately)



Simson Prep M

Bostik Simson Prep M is a one-step pretreatment for the improvement of the adhesion on non-porous substrates of several specific Simson products, based on Silyl Modified Polymer (SMP). Recommended for use in pre-treatment of plain aluminium, steel, copper and brass surfaces. Pre-treatment of powder coated metals, pretreatment of lacquered metals (first make a test on the substrate to check possible effects), pre-treatment of polyester (GRP), pretreatment of ABS and pretreatment of PVC.

CODE	COLOUR	SIZE	CARTON
30608604	Clear	250 mL	24



PRIMERS continued



Simson Primer MSP

Bostik Simson Primer MSP is a liquid primer for adhesion improvement of sealants and adhesives on porous surfaces. Recommended for use in pre-treatment of mineral surfaces, such as brick, concrete and cellular concrete. For use with SMP (MS) products.

CODE	COLOUR	SIZE	CARTON
30022080	Clear	500 mL	1



Simson Prep G

Bostik Simson Prep G has been developed as a black pretreatment for use on glass, not having a ceramic coating, in order to provide a UV-protecting coat, before applying special adhesives for bonding glass (also PMMA and PC) in the automotive, bus, ship and railway industries. Recommended for pretreatment of glass substrates without ceramic coating. Repair of damaged paint layers on metallic supports.

CODE	COLOUR	SIZE	CARTON
30804483	Black	250 mL	1



Simson Prep G Plus

Bostik Simson Prep G Plus has been developed as a black pretreatment for use with Bostik products on glass that is not protected from UV by a ceramic coating. Also PMMA and PC. Used in the automotive, bus, ship and railway industries. Repair of damaged paint layers on metallic supports.

CODE	COLOUR	SIZE	CARTON
30602131	Black	250 mL	1



Simson Prep P

Bostik Simson Prep P is a liquid pre-treatment for improving the adhesion of several Simson products on porous substrates. Recommended for use in pretreatment of mineral substrates, such as brickwork, concrete and lightweight concrete. Pre-treatment of wooden substrates (such as seams in teakwood ship decks). For use with SMP (MS) products. For use with SMP (MS) products.

CODE	COLOUR	SIZE	CARTON
30023300	Clear	500 mL	1

Recommended Adhesives & Sealants Selection Guide

GUIDE ONLY – USER TO TEST FIRST

BOSTIK HOTLINE

Smart help 0508 222 272 (NZ) 1800 898 551 (AU)

bostik.co.nz

	Туре	Interior	Exterior	Acoustic Rated	Control Joints
GRAB ADHESIVES					
Alpha Grip	Polyurethane	1	1		
MS Safe Fix	MS	1	1		
High Tack	MS	1	1		
Stik-N-Seal	Rubber/Solvent	1	1		
Tuf As Nails General Purpose	Rubber/Solvent	1			
Tuf As Nails Original	Rubber/Solvent	1			
Tuf As Nails Water Based	Acrylic	1			
Wallboard Gold	Rubber/Solvent	1	1		
Wallboard Gold Ultra	Acrylic	1			
Wallboard Gold Xtreme	MS	1	1		
Shower Grip	Rubber/Solvent	1			
Simson ISR 70-03	MS	1	1		
Simson ISR 70-08 AP	MS	1	1		
Simson MSR CA SSKF (Marine)	MS	1	1		
Ultragrip Panel & Stud Adhesive	Acrylic	1			
SEALANTS					
Coolroom Sealant	Silicone	1	1		1
Industrial Grade Neutral Cure	Silicone	1	1		
Roof & Gutter Neutral Cure	Silicone	1	1		
Kitchen & Bathroom NC	e::::				
KILCHEN & BALHFOOTHINC	Silicone	1			
MS Safe Seal	MS	✓ ✓	1		~
			ر الم		\ \
MS Safe Seal	MS	1			> > >
MS Safe Seal C Seal N' Flex Facade	MS Hybrid Polyurethane	1	1		> > > >
MS Safe Seal C Seal N' Flex Facade Seal N' Flex 1	MS Hybrid Polyurethane Polyurethane	\ \ \	√ √		> < < <
MS Safe Seal C Seal N' Flex Facade Seal N' Flex 1 Seal N' Flex FC	MS Hybrid Polyurethane Polyurethane Polyurethane	\ \ \	√ √		
MS Safe Seal Seal N' Flex Facade Seal N' Flex 1 Seal N' Flex FC All Purpose Silicone	MS Hybrid Polyurethane Polyurethane Polyurethane Silicone	\ \ \	√ √		
MS Safe Seal C Seal N' Flex Facade Seal N' Flex 1 Seal N' Flex FC C All Purpose Silicone Duct Sealer C	MS Hybrid Polyurethane Polyurethane Polyurethane Silicone Rubber/Solvent	\ \ \	√ √		
MS Safe Seal C Seal N' Flex Facade Seal N' Flex 1 Seal N' Flex FC C All Purpose Silicone Duct Sealer Shower Seal C	MS Hybrid Polyurethane Polyurethane Polyurethane Silicone Rubber/Solvent	\ \ \	√ √		
MS Safe Seal Seal N' Flex Facade Seal N' Flex 1 Seal N' Flex FC All Purpose Silicone Duct Sealer Shower Seal FILLERS	MS Hybrid Polyurethane Polyurethane Silicone Rubber/Solvent Silicone	\ \ \	√ √		
MS Safe Seal Seal N' Flex Facade Seal N' Flex 1 Seal N' Flex FC All Purpose Silicone Duct Sealer Shower Seal FILLERS Fill-A-Gap	MS Hybrid Polyurethane Polyurethane Silicone Rubber/Solvent Silicone Acrylic	\ \ \	√ √		
MS Safe Seal Seal N' Flex Facade Seal N' Flex 1 Seal N' Flex FC All Purpose Silicone Duct Sealer Shower Seal FILLERS Fill-A-Gap PEF Backing Rod	MS Hybrid Polyurethane Polyurethane Silicone Rubber/Solvent Silicone Acrylic	\ \ \	√ √		

PEC	AL	REQ	UIF	REM	EN	TS		TI	MBI	ER					С	ON	STR	UCI		1						0	THE	R	
Fire Rated		Food Safety Approval	-	Potable Water	Trafficable	WetArea	Automotive	Timber Products	LOSP Treated	CCA Treated	Aluminium	Acrylic Shower Lining	Bricks	Cementitious	Ceramic Tiles	Fibre Cement	Galvanised Iron	Glass	Laminex/Formica	Mirror	Plasterboard	Polystyrene	Stainless Steel	Zincalume	ABS Plastic	Porcelain	Previously Painted	Rigid PVC	Soft Vinyl
						1		✓			1		1	1		1	1		1		1		1	1		✓	1	1	✓
	~							1	1		1		1	1	1	1	1	1	1	1	1	1	1	1	1	1		1	
	1							1			1		1	1	1	1	1	1	1	1	1	1	1	1	1	1		1	
							1	1					1	1		1	1		1		1			1	1			1	1
								<i>√</i>			<i>✓</i>		1	1		<i>√</i>	1		<i>√</i>		1			<i>√</i>	<i>✓</i>				
	1					1		✓ ✓	1		1	1	\ \	\ \		✓ ✓	\ \		1		\ \	1		✓ ✓	1		1		
	v					1		✓ ✓	v V	1	1		<i>s</i>	<i>v</i>		v V	<i>v</i>				<i>✓</i>		1	V V			v		
	~							1	1	1			1	1	1	1	1		1	1	1	1		1			1		
	1						1	1			1		1	1	1	1	1	1	1	1	1	1	1	1	1	1		1	
						1		1			1	1	1	1		1	1		1		1			1	1				
	1		1					√			1						1	1	1				1	1			1	1	
1			1			1	1	<i>√</i>			✓ ✓						1	\ \	1				1	✓ ✓			1	1	
~	1		1			<i>✓</i>		✓ ✓	1		~		1	1		1	\ \	~	~		1		1	✓ ✓			✓ ✓	~	
	-																												
	 Image: A start of the start of	1				1					1		1	1		1	1	1						1		1	1		
	1							1			1		1	1		1	1	1						1			1		
											1		1	1		1	1							1			1		
						1					1	1	1	1	1	1	1								1	1	1		
	√		√					√			√		1	1	1	1	1		√		1		1	1	√			1	
	✓ ✓	✓ ✓	√ √	1		1		✓ ✓			✓ ✓		\ \	\ \	1	✓ ✓	1		✓ ✓		\ \		✓ ✓	✓ ✓	✓ ✓			1	
	۷ ا	~	✓ ✓	л Г	1	✓ ✓		✓ ✓			✓ ✓		✓ ✓	✓ ✓		✓ ✓	✓ ✓		✓ ✓		л Г		✓ ✓	✓ ✓	✓ ✓				
	•		•	•	•						· ·		· ·	· /		✓	· ·	1			•			· ·	•		1		
								1			1		1	1		1	1						1	1					
						1					1	1	1	1	1	1	1								1	1	1		
	1		1					1					1	1	1	1					1						1		
✓ ✓	1		1			1		<i>√</i>	1				1 1	\ \		✓ ✓	1		1		1		1	1			1		
↓	~		~	1		1		1					1	1		1	1		1		1		1	 Image: A second s	1				



Smart help 0508 222 272

JULY 2021 Bostik NZ Ltd

WELLINGTON 19 Eastern Hutt Rd, Wingate 5019 Lower Hutt, New Zealand Phone: +64 4 567 5119 Fax: +64 4 567 3776 AUCKLAND 148 Pavilion Drive Airport Oaks, Auckland 2022 Phone: +64 9 257 5847 Fax: +64 9 257 3589

bostik.co.nz