

BOSTIKROLL


A TAILOR-MADE RANGE



The new Bostik Roll range features products which have been specially designed for specific applications such as the installations of new floor coverings, skirting, one-piece stair treads, PVC shower systems and fittings. The range offers an effective solution to growing trends within the coverings market whilst meeting the existing needs of the floor layers and fitters.



BREEAM®

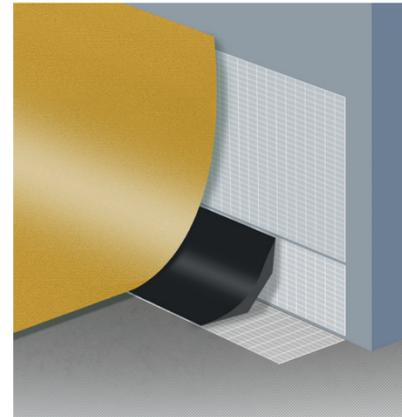

BOSTIK ROLL 25/50/85

SKIRTING

Reinforced adhesive strip for fitting all types of skirting, accessories and protective wall panels, and for coving up floor covering to form skirting : soft floor coverings covered to form skirting (PVC, linoleum, rubber), textile skirting (carpet, needle-punched fabric), PVC skirting and cable ducting, wooden skirting, protective wall panels (for hospitals and health centers), accessories (floor- or wall-mounted).

Reel widths: 25 mm, 50 mm or 85 mm.
Reel length: 50 m.

- Immediate grip and long-life bond.
- Extra-strong.
- Quick, easy and clean installation.
- No waiting time required.
- Fully compatible with PVC coverings.
- High temperature resistance (-40°C to +120°C).
- Compatible with under-floor heating.



BOSTIK ROLL 240

STAIRS

Reinforced adhesive strip for the implementation of soft floor coverings in stairs: PVC, linoleum, rubber, carpet, needle-punched fabric. Suitable for stairtreads with pre-shaped corner, protective wall panels (for hospitals and health centers), tactile slabs and guide paths.

Reel width: 240 mm.
Reel length: 25 m.

- Immediate grip and long-life bond.
- Extra-strong.
- Quick, easy and clean installation.
- No waiting time required.
- Can accept foot traffic immediately.
- Fully compatible with PVC coverings.
- High temperature resistance (-40°C to +120°C).
- Compatible with under-floor heating.




BOSTIK ROLL 740

FLOOR

Wide adhesive strip for use with soft floor coverings and suitable for use on new surfaces and existing floor coverings as well as temporary installations such as trade shows, exhibitions and special events. It enables the floor covering and adhesive to be removed manually in a single operation, even after several years.

Reel width: 740 mm.
Reel length: 25 m.
+additional edging reel: 50 mm x 25 m.

- Quick, easy and clean installation.
- Additional edging reel included.
- Micro-perforated mesh, to prevent adhesive lumps from forming.
- Can accept foot traffic immediately.
- Immediate welding.
- Fully compatible with PVC coverings.
- Easy removal.
- Compatible with under-floor heating.

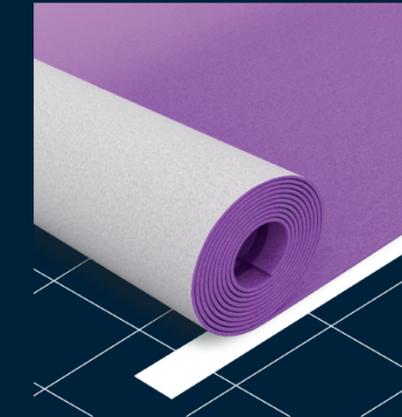


BOSTIK ROLL RF50 / RF100

FLOOR RENOVATION

Removable adhesive strip specially designed for use with flexible floor coverings in renovation projects. Ensures a strong bond around the edges of the room (BOSTIK ROLL RF 50), as well as at the seams (BOSTIK ROLL RF 100). Mainly designed for semi-permanent installation of homogeneous, heterogeneous PVC and expanded vinyl floor covering strips.

Reel widths: 48, 96 mm.
Reel length: 25 m.

- Quick, easy and clean installation.
- Easy removal.
- Can accept foot traffic immediately.
- Immediate welding.
- Fully compatible with PVC coverings.
- Compatible with under-floor heating.

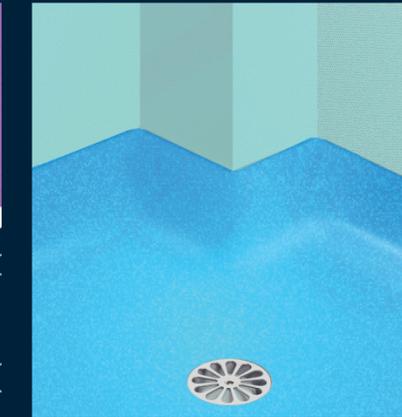

BOSTIK ROLL SD50

SHOWERS

Thin adhesive strip specially designed for use with PVC wall coverings in shower units, for hospitals, nursing homes and healthcare facilities. Replaces solvent-based neoprene adhesives.

- Bonds corners in PVC wall coverings.
- Bonds reduction profiles and support forms.

Reel width: 48 mm.
Reel length: 50 m.

- Immediate grip and long-life bond.
- Extra-strong.
- Very thin, no bulges.
- Quick, easy and clean installation.
- High temperature resistance (-40°C to +120°C).



BOSTIK ROLL MT35

INSTALLATIONS/FITTINGS

Adhesive on high-performance multi-purpose foam, for interior fitting, decoration and finishing work: metal step edges and threshold strips, first row installed in wooden floor job-sites, mirrors and decor items, wall panels, elevator linings.

Reel width: 35 mm.
Reel length: 25 m.

- Immediate grip and long-life bond.
- Extra-strong.
- Wide range of uses.
- Smooths out uneven surfaces.
- Quick, easy and clean installation.
- High temperature resistance (-40°C to +120°C).

A «SUSTAINABLE BUILDING» RANGE

The Bostik Roll range is used as an effective alternative to solvent-based adhesives. Phthalate-free and solvent-free achieving A+ and ECI Plus ratings with LEED and BREEAM thanks to its very low VOC emissions.»



FOR A QUICK STICK

Ready to use, dry adhesive rolls are convenient, clean and solvent-free. No cure time is required and the worksite can remain open to traffic. With sizing and packaging specially designed for each application, adhesive has never been so quick and easy to use.



BOSTIK ROLL FOR A QUICK STICK

RANGE OF PROFESSIONAL FLOORING TAPES

	Item code	Gencod	Sizes	PCB	Pallet
BOSTIK ROLL 25	30607844	3549212475475	25mm x 50m	8	8x60 = 480
BOSTIK ROLL 50	30607845	3549212475499	50mm x 50m	5	5x60 = 300
BOSTIK ROLL 85	30607846	3549212475512	85mm x 50m	3	3x60 = 180
BOSTIK ROLL 240	30607857	3549212475536	240mm x 25m	1	96
BOSTIK ROLL 740	30607858	3549212475550	740mm x 25m	1	35
BOSTIK ROLL RF50	30607860	3549212475598	48mm x 25m	6	6x72 = 432
BOSTIK ROLL RF100	30607861	3549212475611	96mm x 25m	3	3x72 = 216
BOSTIK ROLL SD50	30607859	3549212475574	48mm x 50m	5	5x96 = 480
BOSTIK ROLL MT35	30607843	3549212475451	35mm x 25m	8	8x60 = 480

Bostik Ltd
 Common Road
 Stafford ST16 3EH
 Technical assistance : 01785 272727
www.bostik.com

Bostik S.A.
 253 avenue du Président Wilson
 93211 La Plaine Saint Denis Cedex
 France
www.bostik.com