

**NEW PRODUCT!**

# BAM™

**Fiber-Reinforced, RapidCure™, Large & Heavy Tile Mortar**




## Where brains meet brawn.


BAM™, the Bostik Accelerated Mortar, offers a standard feel with rapid return. It is the best in its class, demonstrating exceptional strength as a high-performance, fiber-reinforced mortar for large and heavy tile. And with that comes the power of RapidCure™ Technology, specially formulated for maximum performance in commercial and residential applications, making most jobs ready to grout in 4 hours while delivering an open time and adjustability time of up to 30 minutes at exceptional bond strength that exceeds ANSI 118.15 requirements. Superior strength, smart technology, and the beauty of a job well done. With BAM™, you get the total package.

## Leverage Bostik's RapidCure™ Technology

- Old-school feel with new-school technology
- **SL-Rapid™**: Ready for tile in 1 hr
- **BAM™**: Ready for grout in 4 hrs
- **Hydroment® Vivid™**: Return to service and walkable in 4 hrs



## Cure Comparison

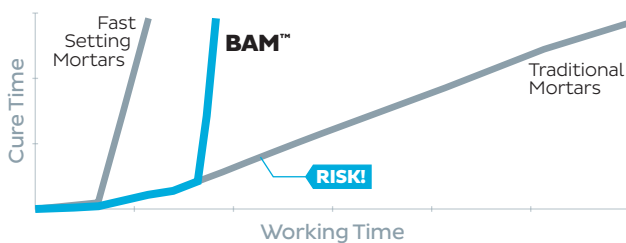

## FEATURES & BENEFITS

Extended open time	Reduces the risk of mortar skinning over
Extended pot life	Reduces waste, controlling work pace
Rapid curing	Cures quickly for fast return to service
Groutable in 4 hours	No extended downtime
Sag resistant	Excellent sag resistance for wall applications
Slump resistant	Reduces lippage with large and heavy tiles
Wide water range	Thin-bed, non-sag, or large and heavy tile mixture
High shear strength and polymer load	<ul style="list-style-type: none"> <li>• Excellent for extra heavy commercial applications</li> <li>• Mosaic, glass &amp; gauged porcelain tile panels</li> <li>• Exterior applications</li> <li>• Areas subject to freeze thaw</li> <li>• Submerged applications</li> </ul>

## PROPERTIES

Tile Types	<ul style="list-style-type: none"> <li>• Large &amp; heavy tiles</li> <li>• Glass tiles</li> <li>• Natural stone</li> <li>• Gauged porcelain tile panels</li> </ul>	<ul style="list-style-type: none"> <li>• Mosaic</li> <li>• Quarry</li> <li>• Porcelain</li> <li>• Ceramic</li> </ul>
	Use Environments	<ul style="list-style-type: none"> <li>• Interior</li> <li>• Exterior</li> <li>• Floor</li> <li>• Wall</li> <li>• Commercial</li> </ul>
Application Properties*	Open / Working Time 70°F (21°C) 50% RH	Up to 30 minutes
	Pot Life	1-2 hours
	Adjustability Time	Up to 30 minutes
	Initial Set	1-2 hours
	Final Set	3-4 hours
	Grout ready	4 hours

\*Set times and physical properties vary based on water range in mixture, temperature, humidity, porosity of substrate and tile size

**For more information, contact us at:**

1-800-726-7845 | [www.bostik.com/us](http://www.bostik.com/us)

Read and understand technical and safety data sheets completely before beginning installation.  
T4297 - 102119

