




ATTACHED TO YOUR WORLD

Sealing and Bonding Smart Range

**A COMPLETE RANGE
FOR THE PROFESSIONALS**

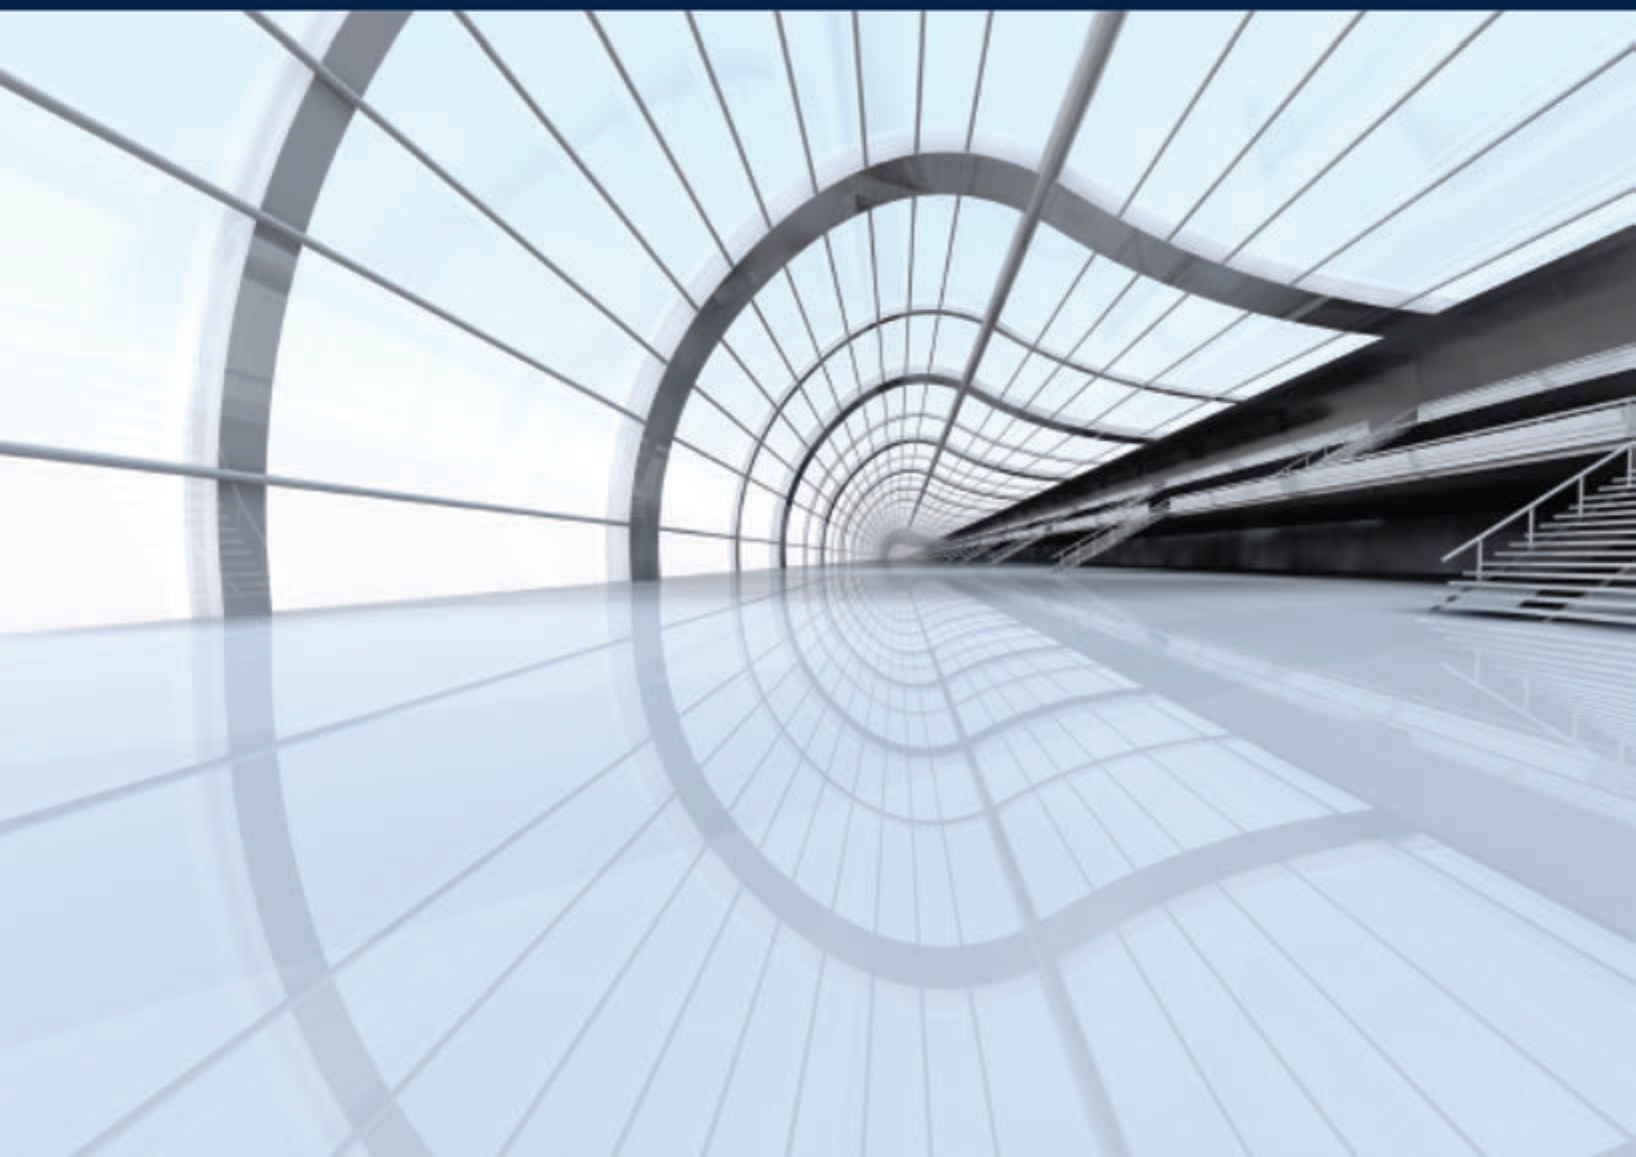



Passive Fire Protection

This picture is for application reference only



FIREBAN ONE POLYURETHANE

One Part Fire Rate Intumescent Polyurethane Joint Sealant


Bostik Fireban® One is a fire rated intumescent, low modulus, one component, Class-A polyurethane sealant. When cured it will form a tough, flexible fire rated seal capable of cyclic expansion and compression movement of 50% ($\pm 25\%$) of the original installed joint width. Bostik Fireban® One is resistant to normal weathering conditions such as rain, sunlight, snow, sleet, ozone, atmospheric contamination and pollution.

Features and Benefits

- Fire Rated up to 4 hours
- Acoustic rated
- One component, no mixing required
- Low modulus 50 % ($\pm 25\%$)
- Excellent durability
- Retains its original properties even after years of weather and UV exposure
- Resistant to weathering conditions
- Paintable
- Non staining
- Does not support fungal growth

Packaging : 600ml sausage

Color (s) : Limestone

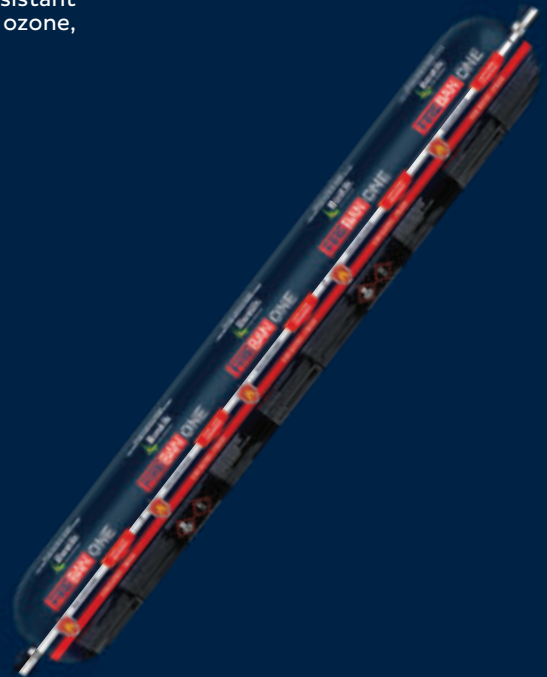



This picture is for application reference only

FIREBAN ACRYLIC

Fire Rated Acrylic Sealant

Bostik Fireban Acrylic is a single component, non-sag, fire rated acrylic based gunnable sealant. A general-purpose product for construction joints and the sealing of service penetrations in plasterboard, concrete floors and masonry wall constructions. Bostik Fireban® Acrylic is a gun grade acrylic based sealing compound specifically manufactured for sealing low movement interior joints (up to +/- 25%) in masonry and plasterboard to provide a fire barrier for periods up to 4 hours.

Features and Benefits

- Fire rating for gaps up to 40mm
- Designed for Australian conditions
- Good flexibility joint movement +/- 25%
- One part no mixing required
- Very easy to apply and gives a smooth finish
- Smooth gunnability and tool off finish
- Low odour
- Non-toxic
- Asbestos free
- Priming not normally required
- Water clean up
- Prevents the passage of hot gases
- Paintable after fully cured
- Water resistant after cure
- Excellent adhesion to metal, wood, plasterboard, all masonry, AAC and Hebel
- Acoustic capabilities with a 60 STC* rating in plasterboard construction Available in three colours, white, grey and limestone

Packaging : 600ml sausage
Color (s) : White, Grey and Limestone





**Smart help :
(632) 7900-5656**

BOSTIK PHILIPPINES, INC.

35/F Raffles Corporate Center, F. Ortigas Jr. Road,
Ortigas Business Center, Pasig City 1600, Philippines

www.bostik.com
an ARKEMA Company

ARKEMA
INNOVATIVE CHEMISTRY