



# RENO C761 BASE

## Roughcast mortar

### WATERPROOFING SOLUTIONS

WALL

- Polymer-rich
- Excellent adhesion
- Inside and outside
- Resistant to frost and de-icing salts



#### DESCRIPTION



**RENO C761 BASE** is the ideal plaster substrate for mineral substrates, as it creates an adhesion and solid connecting bridge between the substrate and the subsequent plaster.

#### AREAS OF APPLICATION

**RENO C761 BASE** is particularly suitable as an adhesive bridge for a subsequent coating with **RENO C762 FINISH** in interior and exterior applications.

It adheres excellently to mineral substrates and in turn forms an absorbent substrate for subsequently applied plaster mortar (e.g. renovation plaster or cement mortar).

On smooth, non-absorbent and carbonized or weathered substrates, security can be further optimized by coating with adhesive emulsion concentrate.

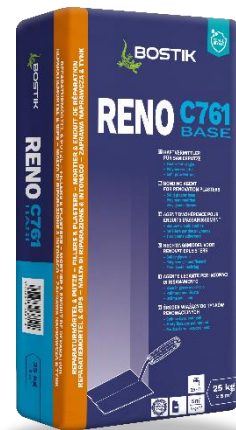

#### PRODUCT CHARACTERISTICS

Color	?
Composition	Roughcast mortar
Drying Time	1 hours
Application Temperature	> + 5 °C
Cleaning	Clean the tool and dirty areas immediately with water. When fully dried, Spraying only mechanically or with limescale remover.
Consumption	About 5kg/m <sup>2</sup>
Shelf life	9 months

## APPLICATION

- Pour water into a clean bucket.
- Add **RENO C761 BASE** and mix by hand, in a mortar bucket with slow-running mixer or with commercially available continuous mixer (mixing time approx. 3 minutes) the mix should be a pre-spray consistency.
- **Spray RENO C761 BASE is surface-rough, wart-shaped and not fully comprehensive (coverage approx. 50%).**
- The material must be processed before thickening begins.
- Material that has already been set must not stirred up or re mixed
- **RENO C761 BASE** should be protected against rapid dehydration, especially outside in sunlight and wind, inside from draughts and thermal stress as well as from frost protect.
- Spraying **RENO C761 BASE** is not specifically used as a levelling mortar

## PREPARATION OF THE SUBSTRATE

The substrate must be mineral, load-bearing and free gypsum and any separating layers, e.g. bitumen, oils, dust, paints, etc.

Loose parts, if possible, remove dry, dispose of any construction waste daily.

Knock off old plaster up to approx. 80 cm above the moisture limit. Brittle masonry joints approx. 2-3 cm deep. Damaged stones must be replaced. Clean masonry thoroughly with compressed air or steel broom .

Good adhesion to the substrate must be ensured. In order to avoid salt returns, construction waste is disposed of in the proximity of the redevelopment object on a daily basis.

For salt-contaminated substrates, we recommend treatment with the **CLEAN R581 ANTI SULFAT** as an accompanying measure.

## CURING

Subsequent plaster application with e.g., renovation plaster **RENO C762 FINISH** should be done after 24 to 48 hours, if possible, in order to exclude adhesion problems caused by sintering.

## OCCUPATIONAL HEALTH & SAFETY

Contains cement, reacts alkaline with water.

Eye and skin irritation is possible.



Please note the hazard statements and safety advice on the containers and in the safety data sheets.

## STORAGE/ SHELF LIFE

Cool and dry. Original packaging approx. 9 months storable.

## DELIVERY FORM

CODE	UC	SIZE	GEN COD
30622828	4008373138142	25kg	42 PC

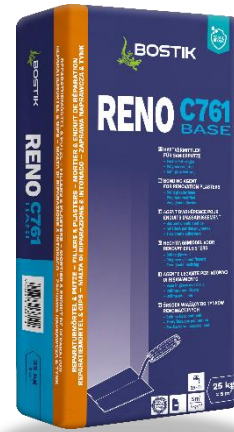

## SAFETY

For more details, consult the safety data sheet on :

<https://bostikdsd.thevercs.com/default.aspx>

*The information given and recommendations made herein are based on Bostik's research only and are not guaranteed to be accurate. The performance of the products, its shelf life, and application characteristics will depend on many variables, including the kind of materials to which the product will be applied, the environment in which the product is stored or applied, and the equipment used for application. Any change in any of these variables can affect the product's performance. It is the buyer's obligation, prior to using the product, to test the suitability of the product for an intended use. Bostik does not warrant the products suitability for any application. The product is sold pursuant to Bostik's Terms and Conditions of Sale that accompanies the product at the time of sale.*

*Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the past.*

This data sheet supersedes all previous issues

**Issued: 02.23**

### **Bostik GmbH**

Add your address

Add your telephone number and Fax

Add your email

## SMART CONTACT

+XX (X) XXX X XXX XXX

