







BLOCK C901 TERRA SPECIAL

Interior waterproofing mortar

WATERPROOFING SOLUTIONS

BASEMENT

-  part of the Aquastopp system
-  good adhesion to substrate
-  flexible
-  extremely loadable
-  fast curing
-  resistant to frost and de-icing salt



DESCRIPTION

BLOCK C901 TERRA SPECIAL is a fast-curing binder that is adapted to the special sealing system. Resistant to frost and de-icing salt.


AREAS OF APPLICATION

BLOCK C901 TERRA SPECIAL is a powder based on cement with inorganic additives.

The special sealing system „AQUASTOPP“ is a sealing system against the damaging effect of non-pressing and pressing water with high load.

It can be applied on all load-bearing, mineral and gypsum- free internal substrates to protect them from water pressing from the outside.

Internal sealing of soil-covered or water covered building constructions in the wall and floor area, e.g., basement, cellars, shafts, tunnels, retaining dams, underground car parks, and water tanks.

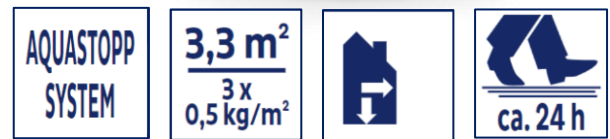

PRODUCT CHARACTERISTICS

Color	Cement grey
Composition	Powder-based on cement with inorganic additives
Drying Time	10-30MINS
Application Temperature	From + 5°C
Cleaning	Immediately with water. After curing, Spezialschlämme can only be removed mechanically.
Consumption	approx. 1.5 kg/m ²
Shelf life	24 months

APPLICATION

BLOCK C901 TERRA SPECIAL is applied on the pre-wetted substrate using a broad brush.

All in all, 3 coats are required when **BLOCK C901 TERRA SPECIAL** is used in the special sealing system. Supplementary materials are **BLOCK C902 TERRA SPECIAL** and **BLOCK C903 TERRA LIQUID**.

PREPARATION OF THE SUBSTRATE

The substrate must be mineral, solid, absorbent and free from gypsum. Before applying the **BLOCK C901 TERRA SPECIAL**, the surface is to be pre-wetted using a broad brush.

SHELF LIFE


24 months when left in the original, unopened packaging.

Store in a cool and dry place between + 5 °C and + 25 °C.

Protect it from frost. Always keep already opened cans hermetically closed.

DELIVERY FORM

CODE	UC	PCB	GEN COD
30621670	4008373135707	5 kg	80 PC



SAFETY

For more details, consult the safety data sheet on :

<https://bostiksdcs.thewerccs.com/default.aspx>

The information given and recommendations made herein are based on Bostik's research only and are not guaranteed to be accurate. The performance of the products, its shelf life, and application characteristics will depend on many variables, including the kind of materials to which the product will be applied, the environment in which the product is stored or applied, and the equipment used for application. Any change in any of these variables can affect the product's performance. It is the buyer's obligation, prior to using the product, to test the suitability of the product for an intended use. Bostik does not warrant the products suitability for any application. The product is sold pursuant to Bostik's Terms and Conditions of Sale that accompanies the product at the time of sale.

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the past.

This data sheet supersedes all previous issues

Issued: 02.23

Bostik GmbH

Add your address

Add your telephone number and Fax

Add your email

SMART CONTACT

+XX (X) XXX X XXX XXX