



BlokStik

For those who prefer strong bonds


High strength bonding adhesive | For AAC blocks
Self curing

Impact-resistant



BlokStik

AAC block adhesive

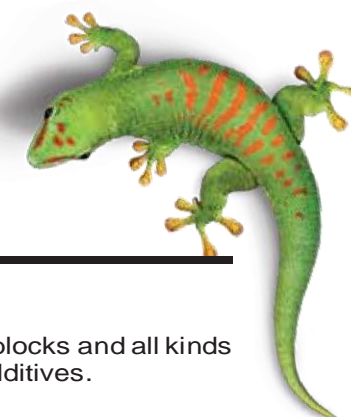

PRODUCT DESCRIPTION

BlokStik is an high strength polymer and modified block mortar suitable for laying AAC blocks and all kinds of blocks. It is made from a unique combination of cement, graded sand and selected additives.



FEATURES & BENEFITS

- Pre mixed and ready to use. Only water is to be added at site.
- Long working time.
- Improved adhesion between blocks.
- Strong, flexible and impact resistant.
- Self curing.
- Ready for subsequent application like plastering after 24 hours.
- Economical (required quantity is much less than conventional cement mortar).

RECOMMENDED FOR

- Interior and exterior use.
- Preparing thin bed jointing mortar for all kinds of blocks.

SURFACE PREPARATION

It is advisable to pre-wet the blocks to be used for fixing. The surface is to be free of loose materials, oil, grease and any other contaminations which could reduce bond strength.

MIXING

Gradually add 2.5 parts of BlokStik Powder to 1 part of water by volume and mix it to a smooth workable paste. Allow the mix to stand for two minutes before applying on the blocks.

APPLICATION

Apply the Mixed BlokStik uniformly on the blocks using the appropriate notched trowel. Also apply BlokStik on both sides of the surface with uniform thickness and continue mounting the blocks. Installation may be made on a damp surface.

COVERAGE

Coverage of BlokStik when applied at 3 mm thickness is approximately 2.5 sq ft per kg. Coverage indicated is based on smoothness and evenness of the substrate, size of the blocks and the thickness of the mortars used.

PERFORMANCE PROPERTIES	
Appearance	Grey Powder
Bulk density	1.80 - 1.90 g/CC
Mix density	1.90 - 2.00 g/CC
Mixing ratio	2.5:1 by volume
Pot life	2 hours at 25°C and 50%RH
Open time	15 - 20 minutes at 25°C and 50%RH
Setting time	24 hours at 25°C and 50%RH
Compressive strength @ 28 days	7.5 to 8 N/mm ²
Packaging	30 kg
Shelf life	12 months from the date of manufacturing for unopened bags stored in dry condition

ABOUT BOSTIK : Bostik is a leading global adhesive specialist in construction, industrial manufacturing, and consumer markets. We create innovative adhesives that make your world safer, efficient, flexible, and responsive to the dynamic challenges of daily life.

Disclaimer

The information and recommendations relating to the application and end-use of the product are given in good faith and based on tests which we believe to be reliable. However, no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship, whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. No guarantee of their accuracy can be made because of the great range of field conditions and variations encountered in raw materials, manufacturing equipment and methods. Thus, the products are sold with limited warranty only, and on condition that purchasers will make their own tests to determine the suitability of the product for their particular purposes.

Bostik India Private Limited

124/1 & 124/2A, Kachanayakanahalli, Off Hosur Road, Bommasandra Post, Anekal Taluk, Bangalore - 560099

An Arkema Company

www.bostik.com

BOSTIK HOTLINE

Smart help +91 080 68297700