



Tile Grout

Like a colourful world?
We have tile grout to match!


Available in 30+ colours | Easy to clean | Non-toxic

Variety of colours!



BostoKolor

Cementitious colour grouts

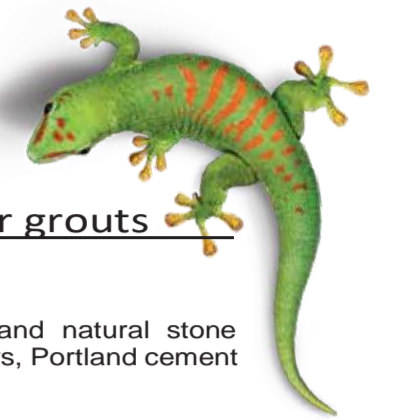

PRODUCT DESCRIPTION

BostoKolor is a special formulated colour grout for filling joints between tiles and natural stone installations. It is made from select UV-stable pigments, proprietary additives, polymers, Portland cement and graded aggregates.



FEATURES & BENEFITS

- Smooth appearance
- Uniform colors
- Mould-resistant
- Variety of colors
- Easy to clean
- Non toxic

RECOMMENDED FOR

- Internal and external applications
- Kitchens
- Bathrooms
- Swimming pools

SURFACE PREPARATION

Grout joints to be clean and dry. The joint should have a minimum gap of 2 mm. It may be necessary to remove the adhesives from the joints. In hot or dry conditions or where tiles are porous, joints should be dampened prior to grouting.

MIXING

Add approximately 1 part of clean water to a clean mixing container. Add approximately 3 parts of grout powder to the water with continuous mixing until a thick toothpaste consistency is achieved. The mixture should be allowed to stand for 2 minutes, then re-stirred. The grout is now ready for use. To produce a flexible, resilient grout, Bostik Grout additive should be used in the grout instead of water.

APPLICATION

Apply the mixed grout with a rubber squeegee, ensuring the grout is worked well into the joints. Wash off the excess grout from the face of the tiles with a damp sponge, when the grout joints have firmed. Cement scale can be removed by polishing the tiles with a soft cloth once the joints are dry. Bostik coloured grout is only recommended for joints up to 5 mm width. For joints larger than 5 mm, use Bostik sanded grout. For terracotta tiles, care should be taken to ensure the grout does not get absorbed into

the pores of the tile or dry out quickly as this will weaken the joint. Dampen joint with water until grout has cured.

COVERAGE

1 kg of grout will cover approximately 2.5 m² at 1.5 mm joints. Coverage is dependent on tile dimensions and joint width can be calculated using the formula below.

$$\frac{(\text{Tile Length} + \text{Tile Breadth}) \times \text{Tile Thickness} \times \text{Joint Width} \times \text{Specific Gravity}}{1000}$$

$$\frac{(\text{Tile Length} + \text{Joint Width}) \times (\text{Tile Breadth} + \text{Joint Width})}{1000}$$

$$= \text{Kg/sq.m}$$

PERFORMANCE PROPERTIES

Appearance	Cementitious powder various colors
Bulk density	1.30 - 1.40 g/CC
Mix density	1.70 - 1.80 g/CC
Mixing ratio	3:1 by volume
Pot life	30-60 minutes at 25°C and 50%RH
Setting time	24 hours at 25°C and 50%RH
Compressive strength @ 28 days	> 18 N/mm ²
Packaging	1 Kg
Shelf life	12 months from the date of manufacturing for unopened bags stored in dry condition

ABOUT BOSTIK : Bostik is a leading global adhesive specialist in construction, industrial manufacturing, and consumer markets. We create innovative adhesives that make your world safer, efficient, flexible, and responsive to the dynamic challenges of daily life.

Disclaimer

The information and recommendations relating to the application and end-use of the product are given in good faith and based on tests which we believe to be reliable. However, no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship, whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. No guarantee of their accuracy can be made because of the great range of field conditions and variations encountered in raw materials, manufacturing equipment and methods. Thus, the products are sold with limited warranty only, and on condition that purchasers will make their own tests to determine the suitability of the product for their particular purposes.

Bostik India Private Limited

124/1 & 124/2A, Kachanayakanahalli, Off Hosur Road, Bommasandra Post, Anekal Taluk, Bangalore - 560099

BOSTIK HOTLINE

An Arkema Company
www.bostik.com

Smart help +91 080 68297700