



BOSTIK

WATERPROOFING SOLUTIONS

BASEMENT
& TANKING

BALCONIES
& WET ROOMS

STRUCTURAL
REPAIR

BUILDING
PROTECTION

ROOFING

ACCESSORIES
& TAPES

BASEMENT & TANKING

BLOCK X300 CEMENTECH COMBI TWO-COMPONENT SEMI-FLEXIBLE WATERPROOFING MORTAR

Cement-based, polymer modified two-component, waterproofing slurry used in wet areas.

- SEMI FLEXIBLE WATERPROOFING
- SUITABLE FOR USE IN CONTACT WITH POTABLE WATER
- USED ON POSITIVE AND NEGATIVE SIDE

CHARACTERISTICS

- Curing time: 72h
- Packaging: (SET) 20kg bag + 5kg jerrycan
- Colour: Grey



BLOCK C301 CEMENTECH DUO ONE-COMPONENT CRYSTALLIZED WATERPROOFING MORTAR

Cement-based, one-component crystalline sealing slurry used in the solution of problems arising from capillary effects in garages, terraces, water tanks and reservoirs, pools, foundations and basements.

- CRYSTALLIZED
- USED ON POSITIVE AND NEGATIVE SIDE
- EXCELLENT PROTECTION AGAINST HUMIDITY AND MOISTURE

CHARACTERISTICS

- Curing time: 72h
- Packaging: 25kg bag
- Colour: Light Red



BALCONIES & WET ROOMS



BLOCK X500 CEMENTECH C2 TWO-COMPONENT FLEXIBLE WATERPROOFING MORTAR

Cement-based polymer modified two-component waterproofing, flexible sealing slurry used in all kind of wet areas, swimming pools and potable water tanks.

- FLEXIBLE WATERPROOFING
- EXCELLENT ADHESION STRENGTH
- TESTED ACCORDING TO THE ETAG 022
- USED ON POSITIVE AND NEGATIVE SIDE

CHARACTERISTICS

- Curing time: 72h
- Packaging: (SET) 25kg bag + 10kg jerrycan
- Colour: Grey



MIX C952 BOSCOMIX CRYSTALLIZED ADMIX

New generation "A³ Technology" enhanced, permanently active, integral crystalline powdered admixture, creates a long term durable waterproof concrete.

- **NON TOXIC**
- **LOW VOC**
- **EVERLASTING PERMANENT INTEGRAL SOLUTION**
- **SELF-HEALING, CRACK BRIDGING CAPABILITY**
- **PROTECT REINFORCEMENT AGAINST CORROSION**

CHARACTERISTICS

- Walking time: 48h
- Packaging: 20kg bag
- Colour:  Grey



E-250 PERF 1K LIQUID APPLIED SEALING AND WATER PROTECTION SYSTEM

Single-component, sythetic resin-based waterproofing system for bonded tiled floors or intermediate floors under screeds for new built and renovation projects.

- **QUICK DRYING TIME**
- **READY-TO-USE**
- **CAN BE USED WITH FOIL MEMBRANE ACCESSORIES**

CHARACTERISTICS

- Drying time: 2h
- Packaging: 20kg plastic bucket
- Colour:  Grey



WP X550 FOIL FLEXIBLE WATERPROOFING AND DECOUPLING MEMBRANE

Waterproofing membrane made of modified polyethylene, laminated with polypropylene fleece on top and bottom, bonded with the substrate. Can be used for quick composite sealing under ceramic tiles and slabs.

- **CAN BE WALKED ON AND LAID IMMEDIATELY**
- **DEFORMABLE AND DECOUPLING EFFECT**
- **VERY LOW EMISSION**

CHARACTERISTICS

- Packaging: 1m x 30m roll
- Colour:  White with length scaling




WP X750 PEEL N' STICK PEEL N STICK SHEET MEMBRANE

Class 2 non-woven sealing membrane coated with butyl rubber adhesive. Suitable for indoor application for medium loads of non-pressurised water (e.g. domestic bathrooms in modular construction).

- **NO ADHESIVE REQUIRED**
- **NO DRYING TIME**
- **FLOOD TEST AND TILE IMMEDIATELY**

CHARACTERISTICS

- Packaging: 30m roll
- Colour:  Grey

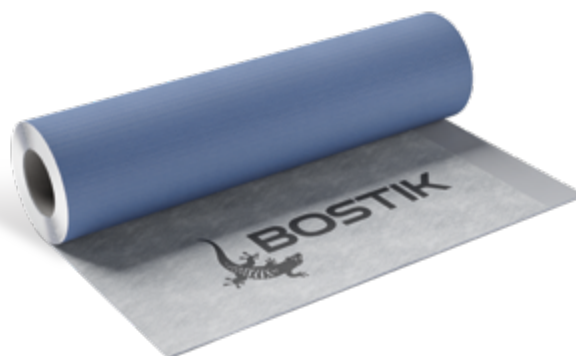

STRUCTURAL REPAIR

RENO E753 INJECT XTREM EPOXY INJECTION RESIN


Two-component epoxy injection resin, used for sealing cracks in buildings and underground constructions.

- **SOLVENT-FREE**
- **LOW VISCOSITY**
- **SAFE FOR DRINKING WATER**

CHARACTERISTICS

- Pot life: 15 min
- Packaging: (SET) 7kg metal can + 3,5kg metal bucket
- Colour:

Grey

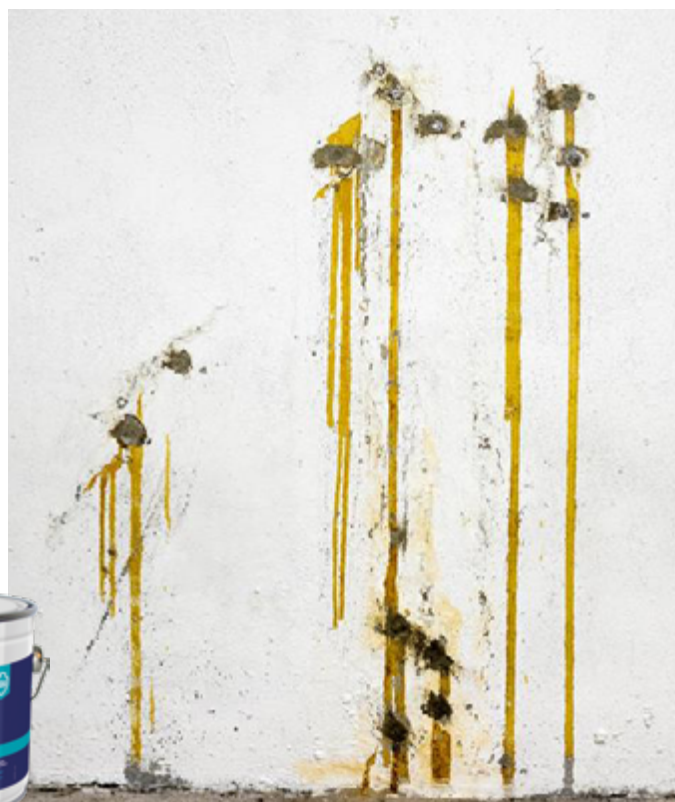

RENO P755 INJECT XTREM 1K POLYURETHANE INJECTION FOAM

One-component, solvent-free, low viscosity, fast foaming polyurethane injection which rapidly reacts upon contact with water to form a highly expanding stable foam.

- **RAPID REACTING**
- **USED FOR UNDERGROUND CONSTRUCTION**

CHARACTERISTICS

- Pot life: <5 min
- Packaging: 20kg metal can
- Colour:

Colourless
foaming to yellow



BUILDING PROTECTION

BLOCK B310 WB COLD APPLIED BITUMEN EMULSION

Cold applied water based bitumen with special mineral emulsifying additives, to give an easily applied protective coating that dries to form a black flexible coating.

- **READY-TO-USE**
- **GOOD RESISTANCE AGAINST CHLORIDE AND SULPHATE IONS**
- **FLEXIBLE AND JOINT FREE**

CHARACTERISTICS

- Recoating time: 3h
- Packaging: 15L bucket, 200L drum
- Colour:  Dark brown (dries to black)



BLOCK B770 FLEX ONE-COMPONENT FLEXIBLE BITUMINOUS COATING

Solvent free, ready-to-use, extra flexible, rubberized bituminous waterproofing coating used for the protection of construction elements.

- **READY-TO-USE**
- **SUPER ELASTIC**
- **USE ON POSITIVE SIDE WATERPROOFING**

CHARACTERISTICS

- Drying time: 48h
- Packaging: 20kg bucket, 200L drum
- Colour:  Black



ROOFING

BLOCK P501 PU MONO PU BASED LIQUID APPLIED WATERPROOFING

One-component, ready-to-use, solvented polyurethane based waterproofing material, suitable for use on the positive side only.

- UV RESISTANT
- HIGHLY ELASTIC
- EXCELLENT CRACK BRIDGING

CHARACTERISTICS

- Walk on time: 24h
- Packaging: 25kg metal can
- Colours:

-  White
-  Grey



BLOCK A515 MULTI ACRYL UV RESISTANT LIQUID APPLIED MEMBRANE

Liquid applied solvent free, ready-to-use, elastomeric resin based, white coloured, UV resistant, waterproofing coating for roofs.

- EXTRA FLEXIBLE
- EXCELLENT CRACK BRIDGING
- UV RESISTANCE

CHARACTERISTICS

- Drying time: 48h
- Packaging: 20kg plastic bucket
- Colour:

-  White



BLOCK P530 BOSCOSEAL PU-D LIQUID APPLIED HYBRID PU ELASTOMERIC WATERPROOFING MEMBRANE


Elastomeric liquid applied hybrid PU styrene acrylic dispersion based waterproof coating and protection for concrete substrates.

- CHEMICAL RESISTANT
- SINGLE COMPONENT, SOLVENT FREE, READY-TO-USE
- HIGH BUILD AND THIXOTROPIC
- EXCELLENT UV RESISTANCE AND WEATHER ABILITY

Characteristics

- Curing time: 7 days
- Packaging: 20kg plastic bucket / 200kg drum
- Colours:

-  Grey
-  White

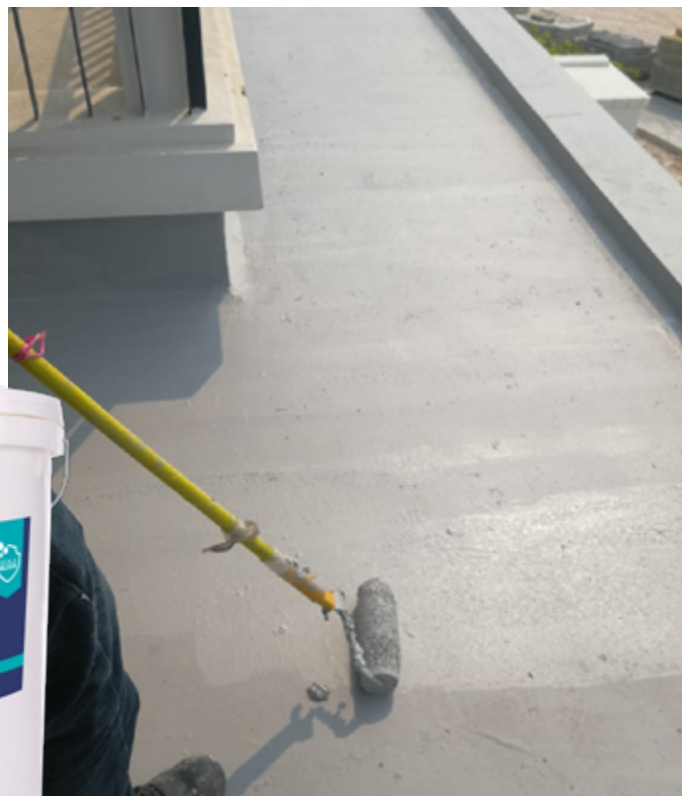

ACCESSORIES & TAPES

ARDATEAPE 120 FLEX SEALING TAPE

Flexible polyester knitted fabric coated with thermoplastic elastomer tape for watertightness.

- CAN BE WALKED ON AND LAID IMMEDIATELY
- TILED IMMEDIATELY
- READY-TO-USE

CHARACTERISTICS

- Packaging: 120mm x 50m roll
- Colours:



ALLGEMEINE
BAUAUFSICHTLICHE
PRÜFUNG A+B+C
P-1200/428/15
+ DIN 18531-5, DIN 18534-3,
DIN 18535-3, DIN 18534-3 W3-1

ARDATEAPE 120 EXTRA SEALING TAPE

Flexible, double-sided, fleece laminated, special sealing tape for watertightening corner and connection joints.

- CAN BE WALKED ON AND LAID IMMEDIATELY
- TILED IMMEDIATELY
- READY-TO-USE

CHARACTERISTICS

- Packaging: 120mm x 50m roll
- Colours:



ALLGEMEINE
BAUAUFSICHTLICHE
PRÜFUNG A+B+C
P-1200/428/15
+ DIN 18531-5, DIN 18534-3,
DIN 18535-3, DIN 18534-3 W3-1

ARDATEAPE WALL & FLOOR WALL & FLOOR SLEEVE

Flexible expansion zone special sleeves with slip-on rubber lip and fleece-covered on both sides.

Flexible and double-sided, fleece aminated floor sleeve for sealing floor drains.

- CAN BE WALKED ON AND LAID IMMEDIATELY
- TILED IMMEDIATELY
- READY-TO-USE

CHARACTERISTICS

- Packaging Wall: 140mm x 140mm, 180mm x 180mm, 250mm x 250mm, 10 pieces/box
- Packaging Floor: 425mm x 425mm, 10 pieces/box
- Colours:



ALLGEMEINE
BAUAUFSICHTLICHE
PRÜFUNG A+B+C
P-1200/428/15
DIN 18531-5, DIN 18534-3,
DIN 18535-3, DIN 18534-3 W3-1

ARDATEAPE INSIDE OUTSIDE INSIDE / OUTSIDE CORNERS

Flexible and double-sided, fleece laminated, prefabricated inside and outside corners.

- CAN BE WALKED ON AND LAID IMMEDIATELY
- TILED IMMEDIATELY
- READY-TO-USE

CHARACTERISTICS

- Packaging: 25 pieces/box
- Colours:



ALLGEMEINE
BAUAUFSICHTLICHE
PRÜFUNG A+B+C
P-1200/428/15
+ DIN 18531-5, DIN 18534-3,
DIN 18535-3, DIN 18534-3 W3-1



ATTACHED TO YOUR WORLD

Bostik Middle East LLC

BUILDING #7192
STREET AL DAMMAM 1140
2ND INDUSTRIAL CITY
DAMMAM 34325
KINGDOM OF SAUDI ARABIA

www.bostik.com/saudi Arabia

Adhesive solutions by **ARKEMA**