

# Block X740 CemenTech C2 Extra

## Two-Component Extra Flexible Waterproofing Mortar

### WATERPROOFING SOLUTIONS

#### UNIVERSAL

- Extra flexible
- Excellent crack-bridging
- Suitable for use in potable water




Old Name : CemenTech C2 Extra

#### PRODUCT DESCRIPTION

**Block X740 CemenTech C2 Extra**, is cement based, two-component, composed of green-colored cementitious compound and white-colored liquid emulsion, extra flexible sealing slurry that is reinforced by polymeric additives and used in the solution of waterproofing problems. It is water repellent and can be used from the positive side only.

#### APPLICATION AREAS

- Interiors and exteriors
- From positive side only,
- Both vertical and horizontal,
- In wet areas (eg. WC, bathroom, kitchen),
- In continuously wet, humid and damp areas such as balcony, terrace and cellar,
- Water tanks, pools, reservoirs and storage tanks,
- In bath and spa,
- In foundations, basement walls, underground and surface construction works,
- In bridges and sustaining walls.

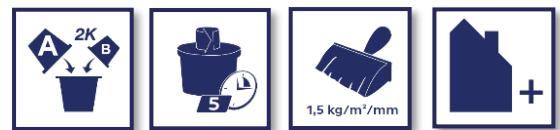

#### TECHNICAL DATA

Colour	Light green
Applicable thickness (mm)	Max. 6 mm
Recommended applicable thickness (for single coat)	2 mm
Dry unit volume weight (kg / lt)	1,2 ± 0,2
Wet unit volume weight (kg / lt)	1,7 ± 0,2
Waiting time in container (min)	~ 30
Drying time (hour)	~ 24
Carbondioxide permeability (m)	>50
Permeability to water-vapour (m)	Class I ; Sd <5
Adhesion strength (28 days)	> 2 (N / mm <sup>2</sup> )
Capillary water absorption	<0,1(<0,1kg/m <sup>2</sup> .h.0,5)
Water pressure	7 bar

Special mixture emulsion amount (for 20 kg powder component)	10 kg white liquid emulsion
Application temperature	Between +5°C and +35°C
Resistance of hardened coating	Between -25°C and +80°C
Technical data are approximately provided according to a temperature of + 23°C and a relative humidity of 50%.	

## FEATURES

- Suitable for brush or spray
- Extra flexible.
- Provides impermeability against the pressured water effect.
- Resistant to heavy weather conditions.
- High adhesion quality, strongly adheres to surfaces.
- High abrasion resistance.
- Suitable for direct contact with freshwater.
- Crack bridging up to 1,5 mm. according to TS EN 14891

## STANDARDS

- TS EN 1504-2
- TS EN 14891
- Type:CM= Cementitious liquid-applied water impermeable products
- CLASS : O2P = Resistant to contact with chlorinated water, with crack bridging ability at low temperature.

## PREPARATION OF THE SUBSTRATE

- The surfaces to be coated should be free of adhesive preventive foreign substances such as dust, dirt, mould oil, paint etc.; residues and wastes like cement, plaster and concrete should also be removed.
- The sub-surfaces that are not strong enough to bear their own weight e.g. cracked plasters, weak surfaces, or residues of moss should be cleaned from the application surface.

## APPLICATION

- Powder form **Block X740 CemenTech C2 Extra** Waterproofing Mortar should be poured slowly on liquid component (10 kg) that has been put into a clean container filled, and should be mixed by means of a mixer with low cycle until a cluster-free mixture is obtained. Mixture duration should be minimum 5 minutes. The mixture obtained at the end of the process should be rested for 3 minutes and mixed again until it becomes homogenous for 2 minutes.
- Block X740 CemenTech C2 Extra** Waterproofing Mortar emulsion should be shaken well before use.
- Application should be at least two layers thick. After applying the first layer, at least 4-6 hours should be rested and second layer should be applied before waiting period exceeds 24 hours.
- The cracks that might be formed in the event of application to very wide surfaces should be prevented by means of application by leaving joints. Joints should be filled with flexible filling material.
- On the moving grounds that have cracking risk, Bostik FlexMesh net can be applied as an intermediate layer between the application with the aim of forming a water isolation layer which is more flexible in order to meet the tensile stress.
- It shouldn't be applied to hot or frozen surfaces directly.

### Application with machine:

**Block X740 CemenTech C2 Extra** is suitable for use with sprayable machine. Consult Bostik Technical Service for machine use.

## AFTER APPLICATION

- Freshly applied surfaces should be protected against direct sun light, strong air stream, high air temperature (above +35°C), rain and frost in the initial days (at least 5 days).
- Any kind of plaster application on the application surface or ceramic tiling works should be performed 3 days later.

To obtain the recommended long term technical performance of the product, after the completion of the all application, the application and/or work should be covered and protected with a suitable coating or covering (plaster, screed, ceramic, tile etc.) as early as possible (depending on the product's drying time within 3-7 days).

## CONSUMPTION

Approximately 1,5 – 2,0 kg/m<sup>2</sup> per each 1 mm thickness.

Coverage amounts are theoretical values, and it is recommended that coverage-controlled sample application is carried out before application.

## PACKAGING

Powder component in 20 kg craft bag, 60 sets in 1 palette

Liquid component in 10 kg jerrycan.

## STORAGE

Dry mortar bags should be protected for water, frost and adverse weather conditions. They should be kept dry and cool on wooden pallets at between +10°C and +25°C in moisture free conditions.

The torn and opened products should be closed immediately and consumed first. Maximum 8 bags should be stocked on each other.

Shelf life is maximum 12 months conditional to complying with the abovementioned storage conditions.

## HEALTH AND SAFETY INFORMATION

For health and safety instruction, first aid measures and spillage and disposal instructions, see separate Safety Data Sheet..

CODE	PCB	PALLET
152011014	20 kg + 10 kg / set	60 SETS



The information given and recommendations made herein are based on Bostik's research only and are not guaranteed to be accurate. The performance of the products, its shelf life, and application characteristics will depend on many variables, including the kind of materials to which the product will be applied, the environment in which the product is stored or applied, and the equipment used for application. Any change in any of these variables can affect the product's performance. It is the buyer's obligation, prior to using the product, to test the suitability of the product for an intended use. Bostik does not warrant the products suitability for any application. The product is sold pursuant to Bostik's Terms and Conditions of Sale that accompanies the product at the time of sale.

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the past.

### Bostik Kimya Sanayi ve Ticaret A.Ş.

Mecidiyeköy Mh. Oğuz Sk. RönesansBiz Plaza N: 4A/7  
Zemin Kat 34381 Şişli, İstanbul  
E-mail: info.tr@bostik.com  
an Arkema company  
www.bostik.com

## BOSTIK TECHNICAL ASSISTANCE

444 10 99

