



# Resilient Flooring Installation Solutions

**ADHESIVES FOR LVT, LVP, SHEET VINYL, VCT,  
WPC, SPC, CARPET TILES & RUBBER FLOORING**



# Bostik is innovating in all markets

- 1 **Aerospace:** Polymers with exceptional properties for the extreme demands of aircraft interiors
- 2 **Flexible Packaging:** Adhesives capable of withstanding the rigors of the flexible packaging industry
- 3 **Non-Wovens:** Super-absorbent polymers & elastic adhesives, improving comfort and well-being
- 4 **Automotive:** Ultra-high performance adhesives for composites used in modern vehicles
- 5 **Resealable Adhesives:** Meeting the growing consumer demand for convenience and sustainability
- 6 **Construction:** Adhesives, grouts, sealants and other construction products revolutionizing the industry
- 7 **Window, Siding & Door:** The preferred choice of many window, siding & door manufacturers worldwide
- 8 **Marine:** Offering a premium line of adhesives and sealants for the marine industry
- 9 **Industrial Lamination:** Innovative bonding solutions that enhance the capabilities of customer's end product



## ARKEMA

INNOVATIVE CHEMISTRY

### Advanced by Arkema For the Ultimate Bond Between Art & Science

For decades, Bostik's products have created literal bonds between surfaces and building components, all while supporting distinctive design. Together, with our parent company, Arkema—a global leader in specialty chemicals and advanced materials—that bond is reinforced.

Bostik's promise to specifiers is backed by three hubs on three continents, thirteen R&D centers worldwide and the same culture of innovation that supports Kynar® fluoropolymer coatings, Rilsan® high-performance polyamides and Plexiglas® acrylic sheet and resin products. Looking ahead, you can rest assured that our bond is just as durable as our adhesives.

KYNARAQUATEC  
BY ARKEMA

RILSAN®  
FINE POWDERS  
BY ARKEMA

PLEXIGLAS®  
BY ARKEMA

# Contents



## Comparison

Resilient Comparison Chart 5

## Surface Consolidators

Encap-Cote™ 6

Gypsum-Cote™ 6

## Resilient Adhesives

LVT-Lock+™ 7

Multi-Lock™ 7

Uni-Lock+™ 9

VCT-Lock™ 9


Cove-Lock™ 9

Aero-Lock™ 10

GreenFusion™ 10

## Sealants

915FS™ 11

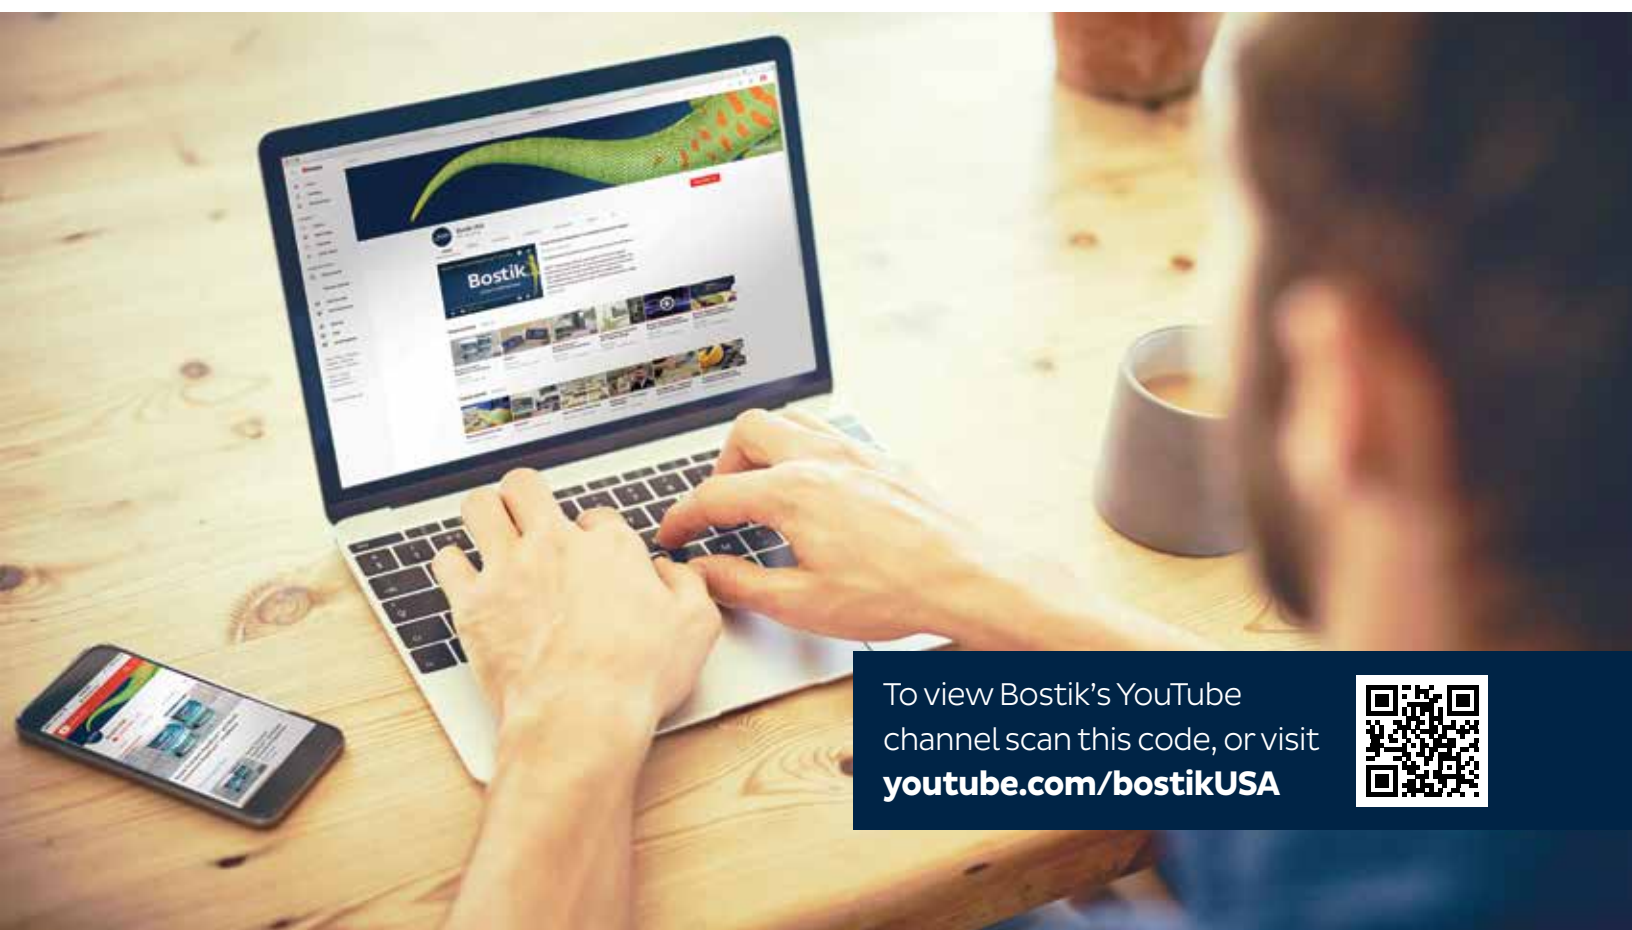

To view Bostik's YouTube channel scan this code, or visit [youtube.com/bostikUSA](https://www.youtube.com/bostikUSA)





# Bostik's Complete Line of Resilient Installation Solutions

Residential or commercial, interior or exterior - a smart solution awaits. These low VOC products are easy to spread and clean, bond tenaciously to most substrates, and are backed by a global leader in adhesive science.

## A COMPLETE RANGE

Bostik's industry leading range of high performance, resilient flooring installation adhesives is comprised of both polyurethane and water-based, acrylic technology. This new family brings customers the application breadth, performance and confidence

they have come to expect from Bostik. Our Resilient Flooring Systems are designed to bond LVT, VCT, LVP/WPC, SPC, sheet vinyl, rubber, cork, linoleum, or carpet & pad, to concrete, plywood, asphalt, or other substrates common to resilient installations.



# Resilient Adhesives

COMPARISON CHART



		LVT-Lock+™	Multi-Lock™	Uni-Lock+™	VCT-Lock™	Aero-Lock™	Cove-Lock™	GreenFusion™
<b>Product Type</b>	--	Firm-Set Acrylic	Pressure Sensitive Acrylic	Firm Set Transitional	Pressure Sensitive Acrylic	Pressure Sensitive Acrylic	Firm Set Acrylic	1-Part Moisture-Cure Polyurethane
<b>Applications</b>	--	Firm-set LVT/LVP/WPC/Sheet Vinyl adhesive to accommodate high rolling loads. Quick flash time, but long working time	Permanent pressure sensitive adhesive for high moisture and pH resistance for LVT/LVP/WPC & sheet vinyl	Universal firm set transitional adhesive with pressure sensitive properties for common applications of most resilient flooring types	Pressure sensitive adhesive for VCT flooring applications.	Easy spray application of high moisture resistant adhesive for vinyl flooring (LVT/LVP/WPC/Sheet Vinyl) & VCT	Cove base adhesive for difficult to bond materials	Indoor/outdoor bonding of rubber flooring
<b>Flooring Types</b>	Luxury Vinyl Tile/Plank	Yes	Yes	Yes	No	Yes	No	No
	Sheet Vinyl	Yes	Yes	Yes	No	Yes	No	No
	VCT	No	Yes	Yes	Yes	Yes	No	No
	Modular Carpet Tiles	No	No	Yes	No	No	No	No
	Rubber	No	No	No	No	No	No	Yes
	Vinyl Cove Base	No	No	No	No	No	Yes	No
	Rubber Cove Base	No	No	No	No	No	Yes	No
<b>Use Environments</b>	Exterior	No	No	No	No	No	No	Yes
	Residential	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Commercial	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Wet Areas	No	No	No	No	No	No	Yes
<b>Substrates</b>	Concrete	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	APA Grade Plywood	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Well-Bonded Vinyl	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Terrazzo	No	No	No	Yes	No	No	Yes
	Asphalt	No	No	No	No	No	No	Yes
<b>Physical Properties</b>	Req'd Flash Time (minutes)	Porous: 10-20 Non-porous: 30-60	Porous: 10-20 Non-porous: 30-60	10-20	0-15	Porous: 10-20 Non-porous: 30-60	0	0
	Wet Lay	Yes	No	No	No	No	Yes	Yes
	Working Time	4 hours	4 hours	4 hours	16 hours	2 hours	Up to 30 min	30-40 min
	Return to Heavy Traffic	72 hours	Immediate	72 hours	72 hours	Immediate	12 hours	24 hours
	Moisture Protection of flooring	None	None	None	None	None	None	6 lbs/80%
	Moisture Resistance	Up to 90% RH	Up to 95% RH	Up to 99% RH*	95% RH	Up to 95% RH	N/A	Unaffected
	pH Resistance	Up to 10.0 ph	Up to 11.0 ph	Up to 12.0 ph**	8.0-10.0 ph	Up to 11.0 ph	N/A	Unaffected
	Freeze/Thaw	Do Not Freeze	Do Not Freeze	Do Not Freeze	Do Not Freeze	Do Not Freeze	Do Not Freeze	Stable
<b>Packaging</b>	--	4 gal bio pail, 4 x 1 gal pail case	4 gal bio pail, 4 x 1 gal pail case	4 gal bio pail, 4 x 1 gal pail case	4 gal bio pail	6 x 22 oz can case	4 gal bio pail, 12 x 30 oz cartridge case	4 gal metal pail

Please refer to technical data sheets for proper use instructions.

\* 95% for PVC carpet tile, 90% for sheet vinyl

\*\* 10.0 ph for sheet vinyl

# Encap-Cote™

## ADHESIVE RESIDUE ENCAPSULATOR

Encap-Cote™ is a light-colored, high-strength acrylic polymer compound formulated to isolate old cutback stains and other adhesive residues that would discolor or affect the bond of the new flooring installation. Black asphalt-based cutback adhesive is highly reactive with vinyl back flooring and must be completely removed until there are no remaining trowel ridges or continuous film. Encap-Cote™ can be used to isolate the remaining permanent stain after the cutback has been removed. Prior to the installation of floor covering systems, Encap-Cote™ provides a clean surface for better adhesive bonds. It is solvent-free, low VOC, and contains an antimicrobial system for enhanced resistance to mold and mildew. Encap-Cote™ is designed and warranted for use only in conjunction with adhesives manufactured by Bostik, Inc.



SURFACE CONSOLIDATORS



APPROVED FOR USE OVER 'CUTBACK' STAINS

IMPROVES ADHESIVE BOND

PROTECTS AGAINST PLASTICIZER MIGRATION

Encap-Cote™			
Item No.	Size	Barcode	Case Code
30856456	4 gal	747224700834	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
4 gal pail	44.7 lbs	48 pails	2,201 lbs

# Gypsum-Cote™

## PRIMER FOR ALKALINE OR POROUS SUBSTRATES

Gypsum-Cote™ is an acrylic floor preparation solution designed to improve flooring substrates before the application of floor-covering adhesives. Gypsum-Cote™ will improve dry, porous substrates for a better bonding surface, help protect the adhesive from alkalinity damage and improve adhesive spread rate. Gypsum-Cote™ is suitable for use over APA approved flooring grade plywood, concrete or acoustical concrete and floor patch and can prevent over absorption of adhesives resulting in a better bond. Gypsum-Cote™ may also be used as a primer for gypsum-based substrates prepared in accordance with ASTM F2419. Gypsum-Cote™ is designed and warranted for use only in conjunction with adhesives manufactured by Bostik.



GYPSUM SURFACE STRENGTHENER

BLOCKS SURFACE PH

ROLL ON APPLICATION

Gypsum-Cote™			
Item No.	Size	Barcode	Case Code
30856459	4 gal	747224700841	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
4 gal pail	35.5 lbs	48 pails	1,759 lbs

# LVT-Lock+™

## FIRM-SET VINYL FLOORING ADHESIVE

LVT-Lock+™ is a solvent-free, water-based, acrylic adhesive specifically formulated for the installation of vinyl flooring in high rolling load applications. LVT-Lock+™ is a 0-VOC formulation as calculated by SCAQMD Rule 1168. It displays tenacious early bond strength, and is specially formulated to be highly resistant to plasticizer migration. LVT-Lock+™ has been formulated to exhibit a unique combination of application properties including excellent trowelability, fast tack/grab, low odor and easy clean up.

LVT-Lock+™ may be used to adhere LVT (Luxury Vinyl Tile), LVP (Luxury Vinyl Plank), WPC (Wood Plastic Composite), and sheet vinyl. It may be used over all properly prepared substrates common to resilient flooring installations including; concrete, APA grade plywood, cementitious-based patch/underlayments, gypsum-based patch/underlayments (in dry, above-grade applications), terrazzo, and radiant heated flooring.



**RAPID TACKING, FIRM SET**

**HIGH BOND & SHEAR STRENGTH**

**PLASTICIZER MIGRATION RESISTANT**

**RESILIENT ADHESIVES**

LVT-Lock+™				
Item No.	Color	Size	Barcode	Case Code
30856392	White	4 gal	747224700537	--
30856395		1 gal	747224700544	10747224700534
Package Size		Weight/Unit	Units/Pallet	Weight/Pallet
4 gal pail		35.5 lbs	48 pails	1,744 lbs
4x1 gal* case		36.64 lbs/case	36 cases	1,360 lbs

\*Sold in full cases only

# Multi-Lock™

## UNIVERSAL PRESSURE SENSITIVE ADHESIVE

Multi-Lock™ is a solvent-free, water-based, acrylic adhesive specifically formulated for the installation of most resilient flooring in residential and commercial applications and has high moisture resistance. Multi-Lock™ is a 0-VOC formulation as calculated by SCAQMD Rule 1168. It displays tenacious early bond strength and is specially formulated to be highly resistant to plasticizer migration. Multi-Lock™ has been formulated to exhibit a unique combination of application properties including excellent trowelability, fast tack/grab, low odor and easy clean up.

Multi-Lock™ is formulated to resist moderate amounts of moisture vapor from concrete substrates, allowing it to bond flooring in conditions up to 95% RH, and pH of up to 11.0. Always measure the in-situ RH of concrete slabs in accordance with ASTM F 2170 and test the pH of the slab.



**BONDS A WIDE VARIETY OF FLOORING**

**HIGH STRENGTH, HIGH TACK**

**BONDS UP TO 95% RH & 11.0 PH**

Multi-Lock™				
Item No.	Color	Size	Barcode	Case Code
30856394	White	4 gal	747224700582	--
30856397		1 gal	747224700599	10747224700589
Package Size		Weight/Unit	Units/Pallet	Weight/Pallet
4 gal pail		35.1 lbs	48 pails	1,725 lbs
4x1 gal* case		36.24 lbs/case	36 cases	1,345 lbs

\*Sold in full cases only



# Bostik Pro Rewards™

## Contractor Loyalty Program

Now you can earn valuable reward points which can be redeemed for thousands of brand name items or travel rewards, all while growing your business!

To join the **Bostik Pro Rewards™** contractor loyalty program, visit: [www.awardlink.com/Bostik](http://www.awardlink.com/Bostik) where you'll be asked to create a user name and password for your account.

1. Register all eligible Bostik product purchases by submitting your invoices via our rewards program web portal.
2. All registered Bostik product purchases will automatically be deposited into your **Bostik Pro Rewards™** account.
3. Redeem the points you've earned for a wide variety of great rewards.



# JOIN NOW!

[www.awardlink.com/Bostik](http://www.awardlink.com/Bostik)



# Uni-Lock+™

## UNIVERSAL FIRM SET TRANSITIONAL ADHESIVE

Uni-Lock+™ is a multi-purpose, high tack, water-based acrylic adhesive specifically formulated for the installation of LVT, LVP, sheet vinyl, carpet tile & VCT. Uni-Lock+™ is a 0 VOC formulation (as calculated per SCAQMD Rule 1168). Uni-Lock+™ flashes off quickly, yet has a long working time. It displays tenacious bond strength and is specially formulated to be highly resistant to plasticizer migration and staining. Uni-Lock+™ has been formulated with exceptional application properties including excellent trowelability, fast tack/grab, low odor, and easy clean up.



# VCT-Lock™

## MOISTURE RESISTANT VINYL COMPOSITION TILE ADHESIVE

VCT-Lock™ is a solvent-free adhesive that dries translucent. Tiles may be laid into the adhesive for an extended period of time after drying. Aggressive tack permits installers to work off tiles. This low-odor adhesive can be used in occupied environments such as hospitals, schools, nursing homes, hospitality, and food preparation centers. VCT-Lock™ is highly water resistant when dry. VCT-Lock™ contains an advanced antimicrobial system to protect the adhesive from bacteria and fungal growth. VCT-Lock™ has an extended working time provided it remains free of dust and dirt.



# Cove-Lock™

## COVE BASE ADHESIVE

Cove-Lock™ is a solvent-free, water-based, acrylic adhesive specifically formulated for the installation of vinyl (PVC) and rubber cove base. Cove-Lock™ contains low-VOC's (as calculated per SCAQMD Rule 1168). It displays tenacious wet strength and is specially formulated to be highly resistant to plasticizer migration. Cove-Lock™ has been formulated to exhibit a unique combination of application properties including excellent trowelability, fast tack/grab, low odor and easy clean up.



Uni-Lock+™			
Item No.	Size	Barcode	Case Code
Coming Soon	4 gal	747224700902	--
Coming Soon	1 gal	747224700896	10747224700893
VCT-Lock™			
Item No.	Size	Barcode	Case Code
30856455	4 gal	747224700810	10747224200812
Cove-Lock™			
Item No.	Size	Barcode	Case Code
30856423	4 gal	747224700568	--
30856424	30 oz sausage	747224700575	10747224700565



AGGRESSIVE TACK

BONDS A WIDE VARIETY OF FLOORING

BONDS UP TO 99% RH & 12.0 PH\*\*



APPROVED FOR USE OVER 'CUTBACK' STAINS

SOLVENT-FREE

EXTENDED WORKING TIME



HIGH STRENGTH FORMULATION

EASY SPREAD & WORKABILITY

PLASTICIZER MIGRATION RESISTANT

RESILIENT ADHESIVES

Package Sizes	Weight/Unit	Units/Pallet	Weight/Pallet
4 gal pail (Uni-Lock+™)	35.5 lbs	48 pails	1,574 lbs
4 x 1 gal case (Uni-Lock+™)*	36.6 lbs	36 cases	1,181 lbs
4 gal pail (VCT-Lock™)	36.7 lbs	48 pails	1,817 lbs
4 gal pail (Cove-Lock™)	43.5 lbs	48 pails	2,128 lbs
30 oz sausage, 12/case (Cove-Lock™)*	32.02 lbs	60 cases	1,962 lbs

\*Sold in full cases only

\*\* 95% RH & 10.0 PH for PVC carpet tile, 90% RH & 10.0 PH for sheet vinyl

# Aero-Lock™

## SOLVENT-FREE AEROSOL RESILIENT ADHESIVE

Aero-Lock™ is a solvent-free, water-based, acrylic spray adhesive with high moisture resistance, specifically formulated for the installation of sheet vinyl, LVT, and VCT. Aero-Lock™ is a 0-VOC formulation (as calculated by SCAQMD Rule 1168). It displays tenacious early bond strength, and is specially formulated to be highly resistant to plasticizer migration. Aero-Lock™ has been formulated for fast tack/grab, low odor and easy clean up.

RESILIENT ADHESIVES



WITHSTANDS HEAVY TRAFFIC & ROLLING LOADS

SUPERIOR MOISTURE & PLASTICIZER RESISTANCE

BONDS UP TO 95% RH & 11.0 PH

Aero-Lock™			
Item No.	Size	Barcode	Case Code
30856402	22 oz can	747224700551	10747224700541
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
22 oz can, 6/case	10.486 lbs	96 cases	862 lbs

# GreenFusion™

## PREMIUM RUBBER FLOORING ADHESIVE

GreenFusion™ is a solvent-free, single-component, moisture-cured, urethane adhesive specifically formulated for the installation of most rubber flooring. GreenFusion™ is a 0-VOC formulation (as calculated per SCAQMD Rule 1168). Once cured, this adhesive is not adversely affected by exposure to moisture and its superior properties provide a tenacious bond to a variety of surfaces either indoors or outdoors. GreenFusion™ has been formulated to exhibit a unique combination of application properties including excellent trowelability, fast tack/grab, low odor and easy clean up.

GreenFusion™ may be used to adhere most rubber flooring, tile, stair treads, and nosing. It may be used over all properly prepared substrates common to rubber flooring installations including; concrete, asphalt, plywood, cementitious-based patch/underlayment, terrazzo, and radiant heat systems.



SUPERIOR BOND STRENGTH

INTERIOR & EXTERIOR

LOW ODOR & SOLVENT-FREE

GreenFusion™				
Item No.	Color	Size	Barcode	Case Code
30850223	Dark Grey	4 gal	747224622457	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	55 lbs	36 pails	2,055 lbs	



## Bostik's System Solution

- 1** Concrete Slab
- 2** Moisture Vapor Barrier Coating
- 3** Primer Coating
- 4** Self-Leveling Underlayment
- 5** Resilient Flooring Adhesive
- 6** Resilient Flooring

## Bostik also has a full-line of sealants to meet your resilient flooring installation needs

### 915FS™

#### FAST-SETTING SEALANT & ADHESIVE

915FS™ is a smooth, fast-setting polyurethane sealant and adhesive capable of dynamic joint movement totaling 70% (+/- 35%) of original joint geometry. It cures to a tough, flexible rubber when exposed to moisture present in the atmosphere and has physical properties that will remain relatively stable over time in varying weather conditions.

ACCELERATED SKIN TIME

TENACIOUS BOND TO DIFFICULT SUBSTRATES

PERMANENTLY FLEXIBLE



CAULKS, SEALANTS & ADHESIVES (CONTINUED)					
Item No.	Color	Code	Size	Barcode	Case Code
<b>915FS™</b>					
30850253	White	--	24 x 10.1oz /case*	747224900012	10747224900019
30850273	Light Gray	--	24 x 10.1oz /case*	747224900036	10747224900033
30850269	Aluminum Gray	--	24 x 10.1oz /case*	747224900050	10747224900057
30850271	Limestone	--	24 x 10.1oz /case*	747224900067	10747224900064
30850255	Capitol Tan	--	24 x 10.1oz /case*	747224900074	10747224900071
30850257	Black	--	24 x 10.1oz /case*	747224900104	10747224900101
30850275	White	--	12 x 20 oz /case*	747224900128	10747224900125
30850282	Light Gray	--	12 x 20 oz /case*	747224900142	10747224900149
30850280	Aluminum Gray	--	12 x 20 oz /case*	747224900166	10747224900163
30850281	Limestone	--	12 x 20 oz /case*	747224900173	10747224900170
30850277	Black	--	12 x 20 oz /case*	747224900210	10747224900217
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet		
24 x 10.1 oz cartridge*	24 lbs/case	80	1,950 lbs		
12 x 20 oz sausage*	24 lbs/case	100	2,430 lbs		

\*Sold in full cases only

SEALANTS

## Quick Links:

[bit.ly/BostikUSAYoutube](https://bit.ly/BostikUSAYoutube)

[bit.ly/AxiosTechnology](https://bit.ly/AxiosTechnology)

[bit.ly/DimensionGrout](https://bit.ly/DimensionGrout)

[bit.ly/GroutCalculator](https://bit.ly/GroutCalculator)

[bit.ly/BostikBinders](https://bit.ly/BostikBinders)

[bit.ly/BostikMSDS](https://bit.ly/BostikMSDS)



**Smart help:  
1-800-726-7845**

### **Bostik, Inc.**

11320 W. Watertown Plank Road

Wauwatosa, WI 53226

[www.bostik.com/us](http://www.bostik.com/us)

