

**NEW LOOK!
SAME GREAT PRODUCT!**



DUO-SIL Ultra®

ADVANCED HYBRID POLYMER SEALANT & ADHESIVE

KEY FEATURES

- Wet surface application
- Shrink, crack and fade resistant
- Bonds to Kynar® resin-based coatings

DESCRIPTION

Bostik DUO-SIL Ultra® is specifically designed to meet the needs of the professional contractor. It is a superior, all-purpose adhesive and sealant combining enhanced ease of application with long-term performance.

DUO-SIL Ultra® as a sealant can be used on vinyl, aluminum and fiber cement siding, windows, doors, column joints, gutters, roofs, brick molding, counter tops, interior trim, showers and most areas where a sealant is needed.

DUO-SIL Ultra® as an adhesive has superior bond to most building substrates and will adhere to wood, metal, most Kynar® resin-based coatings, gypsum board, vinyl, PVC, cove base, molding, foam board and many more building products.


PRODUCT FEATURES

- All weather application - wet, damp, dry surfaces
- 0° (-18°C) to 140°F (60°C) application temperature
- Paintable in one hour
- Available in 70+ industry colors in stock
- Meets or exceeds the requirements of ASTM C920, Class 50
- Meets the performance requirements of AAMA 803.3-10
- Interior/exterior applications including siding, windows, doors, trim and mouldings
- Superior adhesion and sealing
- Environmentally safe, non-hazardous, non-flammable, and low VOC
- Non-yellowing formula
- Two-piece plastic cartridge will not deteriorate when exposed to the elements
- 4" detachable nozzle for repeated use and increased efficiency

PACKAGING

Available in 9.5 fl oz (266ml) cartridges – 12 per case.
140 cases per pallet.

Available in 20 fl oz (591ml) sausages, white only – 12 per case.
45 cases per pallet.

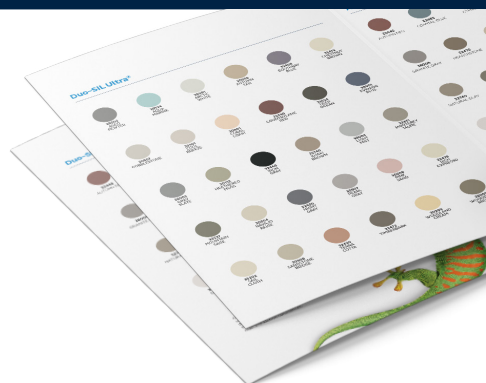

**70+
IN STOCK
INDUSTRY COLORS**



For more information, contact us at:
1-800-359-6398 | www.bostik.com/us

T3706 - 08.17.18