

NEW PRODUCT!

SL-Primer™

Self-Leveling Underlayment Primer



DESCRIPTION


Bostik SL-Primer™ is designed for use with Bostik's line of self-leveling underlayments and patches. SL-Primer™ is a high solids latex primer that seals porous substrates and facilitates bond of the underlayment to the subfloor. SL-Primer™ can be used over concrete and exterior-grade plywood substrates.

PRODUCT FEATURES

- Roll, broom or spray application
- Water-based and VOC compliant
- Very low odor
- Small particle size for excellent penetration
- Excellent bond strength and fast penetration
- Can be applied to green concrete a minimum of 7 days old
- Contributes points to LEED® certified projects

PACKAGING

1 gallon jug; 4 per case, 36 per pallet
4 gallon pail; 36 pails per pallet

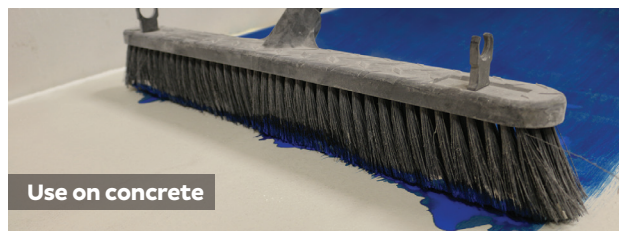

Use on concrete



Use on exterior-grade plywood

APPLICATION & PHYSICAL PROPERTIES

Recommended Tools	Pump sprayer, split tip broom, or 3/8" nap roller
Suitable Substrates	• Concrete • Exterior-grade plywood
Coverage (Yield)	300 - 400 sqft per gallon of concentrate
Application Temperature Range	50°F - 90°F (10°C - 35°C)
Dry Time	1 - 2 hours*
Flash Point	>200°F (>93°C)
Color	Blue
Shelf Life	12 months

LEED® CONTRIBUTION

EQ4.1: Low-Emitting Materials: VOC (as calculated per SCAQMD Rule 1168)	1.4 g/L
--	---------

*Note: Temperature and humidity will effect drying time of SL-Primer™



Apply self-leveling underlayment or patch after 1-2 hours*

For more information, contact us at:

1-800-726-7845 | www.bostik.com/us

Read and understand technical and safety data sheets completely before beginning installation.
T3152 - 12.14.17

