




# Tile and Stone Installation Products

**GROUTS, MORTARS, SURFACE PREPARATION,  
SEALANTS, WATERPROOFING AND ACCESSORIES**



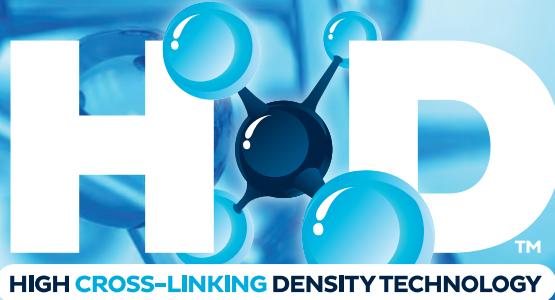

# The backbone of Bostik premium, pre-mixed grout performance

HxD™ Technology enables only Bostik to offer the highest performance resin system of any pre-mixed grout available. The resin system is the most important factor in grout performance. This breakthrough in polymer chemistry enables Bostik premium, pre-mixed grouts to offer unmatched toughness, water and stain resistance. It's no surprise that Bostik is the most specified pre-mixed grout in the architect and design community today.

## THE BOSTIK ADVANTAGE

Bostik HxD™ Technology contains an exceptionally high concentration of cross-linking molecules. This results in a larger, more unified polymer structure or macro-molecule, which is more durable and resistant to penetration and staining from fluids. These superior characteristics provide unmatched performance in wet environments, which is further enhanced by proprietary additives that repel stains like no other grout.

## WHY ACCEPT AN IMITATION?

Most competitive pre-mixed grouts today form a loose resin matrix because of physical entanglement of short polymer chains following the simple evaporation of water. This predominantly physical entanglement can be more easily separated by the everyday forces of impact, abrasion, flex, or even lubrication, when exposed to penetrating liquids such as water. The result is less durable pre-mixed grouts that fail to provide the toughness, stain and water resistance you require over the test of time.



# Contents

## Selection Guide

Tile and Stone Installation Guide 4-5

## Pre-Mixed Urethane Grouts

Dimension® RapidCure™ 6  
TruColor® RapidCure™ 7

## Portland Cement-Based Grouts

Hydroment® Vivid™ 8  
Hydroment® Ceramic Tile Grout™ (Sanded) 9  
Hydroment® Dry Tile Grout™ (Unsanded) 10

## Epoxy & Mortar Grout

EzPoxy™ EzClean™ 11

## Specialty Adhesive

Bosti-Set™ 12

## New Bostik Videos

13

## Mortars & Thin Sets

Glass-Mate™ 14  
Reflex® 14  
StoneWall™ 14  
Big Tile & Stone™ 14  
Single-Flex® FS 15  
Single-Flex® 15  
Large Format Floor™ 15  
Bostik PM™ 15  
Ditra-Set™ 15  
Tile-Mate® Premium 15  
Tile-Mate® Floor & Wall 15  
Porcelain-Mate™ 15  
Mud-In-A-Bag™ 15

## Admixtures

1900™ 16  
425™ 16  
Flex-A-Lastic® 16

## Mastics

D-2001® Ultra-Premium™ 17  
Multi-Purpose™ 17  
Professional Grade™ 17

## Self-Leveling Underlays

SL-200™ 18  
SL-175™ 19  
SL-150™ 19  
SL-Gyp™ 19  
SL-100™ 19

## Repair Patches

UltraFinish™ Pro 20  
UltraRamp™ 20  
Webpatch® D-9001™ 20  
Webcrete® 98 21  
Webcrete® 95 21

## Primers & Vapor Barriers

Universal Primer™ Pro 22  
SL-Primer™ 22  
Slab-Cote™ 22  
D-250™ 22

## Surface Preparation Equipment

BostiMate™ 24  
Collomix LevMix 65 24  
Self Leveling Tool Kit 24  
Leveling Pins 24

## Waterproofing Membranes

Ultra-Set® Advanced 25  
GoldPlus™ 25  
Black-Top™ 25


## Caulks, Sealants & Specialty Products

Bostik 915FS™ 26  
Tub & Tile Caulk™ 26  
Bostik 955-SL™ 26  
Pure Silicone™ 26  
Heavy Duty 26  
Blaze™ 26  
Grout Sealer & Colorant™ 26  
Hand & Tool Towels™ 26  
Texspar Plus 26

# Tile and Stone Installation Guide

Selection Guide Key				
Tile Types		Substrates		
A. Non-Vitreous B. Semi-Vitreous C. Vitreous D. Impervious/Porcelain E. White Translucent Marble F. Granite, Stable Stones and Slate	G. Moisture Sensitive Stone (i.e. Russo LeVanto and Nero Marquina Marble or Green Marble and their Agglomerates) H. Large Ceramic Tile, Stable Stone & Granite I. Resin Backed Stone J. Glass Tiles K. Gauged Porcelain Tiles/Panels	1. Exterior Grade Plywood 2. Concrete 3. Gypsum Wallboard 4. Cementitious Backer Units 5. Properly Prepared Ceramic Tile	6. Properly Prepared Vinyl/VCT tile 7. Cutback Residue (interior, dry only) 8. Clean Steel 9. Approved Waterproofing Membranes	
Product Name	Description	Tile Types	Substrates	Specification
<b>Grouts</b>				
Dimension® RapidCure™	Glass-filled, pre-mixed, urethane grout	A, B, C, D, E, F, G, H, I, J, K	N/A	Not applicable
TruColor® RapidCure™	Premium, pre-mixed urethane grout	A, B, C, D, E, F, G, H, I, J, K	N/A	Not applicable
Hydroment® Vivid	Rapid curing high performance grout	A, B, C, D, E, F, G, H, I, J, K	N/A	A118.7
Hydroment® Ceramic Tile Grout™ (Sanded)	For use in grout joints from 1/8" to 1-1/2"	A, B, C, D, E, F, G, H, I, J, K	N/A	A118.6 & A118.7**
Hydroment® Dry Tile Grout™ (Unsanded)	For use in grout joints up to 1/8"	A, B, C, D, E, F, G, H, I, J, K	N/A	A118.6 & A118.7**
EzPoxy™ EzClean™	100% solids epoxy mortar & grout	A, B, C, D, E, F, G, H, I, K	1, 2, 4, 5, 6, 8, 9	A118.3
<b>Specialty Adhesive</b>				
Bosti-Set™	Thin porcelain tile panel adhesive & sound reduction membrane	K	1, 2, 3, 4, 5, 8, 9	Not applicable
<b>Mortars &amp; Thin Sets</b>				
Glass-Mate™	Glass tile mortar	A, B, C, D, E, F, H, J	1, 2, 3, 4, 5, 7, 9	A118.4 & A118.11** A137.2-7**
Reflex®	Ultra-premium polymer-modified mortar	A, B, C, D, E, F, H, I, J, K	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
StoneWall™	High performance and non-sag mortar	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
Big Tile & Stone™	Polymer-modified large and heavy tile mortar	A, B, C, D, E, F, H, K	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
Single-Flex® FS	Fast-setting premium multi-purpose polymer-modified thin set mortar	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
Single-Flex®	Premium multi-purpose polymer-modified thin set mortar	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
Large Format Floor™	Polymer-modified mortar for large format ceramic floor tiles	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
Bostik PM™	Multi-purpose polymer-modified thin set mortar	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
Ditra-Set™	Portland cement thin set and large and heavy tile mortar for Schluter®-Ditra uncoupling membrane	A, B, C, D, E, F, H	2, 3, 4, (1, 5, 6)**	A118.1, (A118.4 & A118.11)*
Tile-Mate® Premium	Premium thin set mortar	A, B, C, D, E, F, H	2, 4, (1, 3, 5, 6, 7, 9)*	A118.1, (A118.4 & A118.11)*
Tile-Mate® Floor & Wall	Floor & wall thin set mortar	A, B, C, D, E, F, H	2, 4, (1, 3, 5, 6, 7, 9)*	A118.1, (A118.4 & A118.11)*
Porcelain-Mate™	Polymer-modified portland cement thin set mortar	A, B, C, D, E, F, H	2, 4, (1, 3, 5, 6, 7, 9)**	A118.4
<b>Admixtures</b>				
1900™	Epoxy modified grout & mortar admixture	A, B, C, D, E, F, G, H, I	1, 2, 3, 4, 5, 6, 7, 9	A118.8
425™	Multi-purpose acrylic latex admixture	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4, A118.6, A118.7 & A118.11
Flex-A-Lastic™	Flexible, high solids, acrylic mortar admixture	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
<b>Mastics</b>				
D-2001® Ultra-Premium™	Superior performance ceramic tile mastic	A, B, C, D, F, H	1, 2, 3, 4, 5	A136.1 Type I & Type II
Multi-Purpose™	Floor & wall mastic	A, B, C, D, F	1, 2, 3, 4, 5	A136.1 Type I & Type II
Professional Grade™	Ceramic tile mastic	A, B, C, D, F	1, 2, 3, 4, 5	A136.1 Type I

\*Mixed with 425™ or Flex-A-Lastic™ admixtures, \*\* Mixed with 425™ admixture

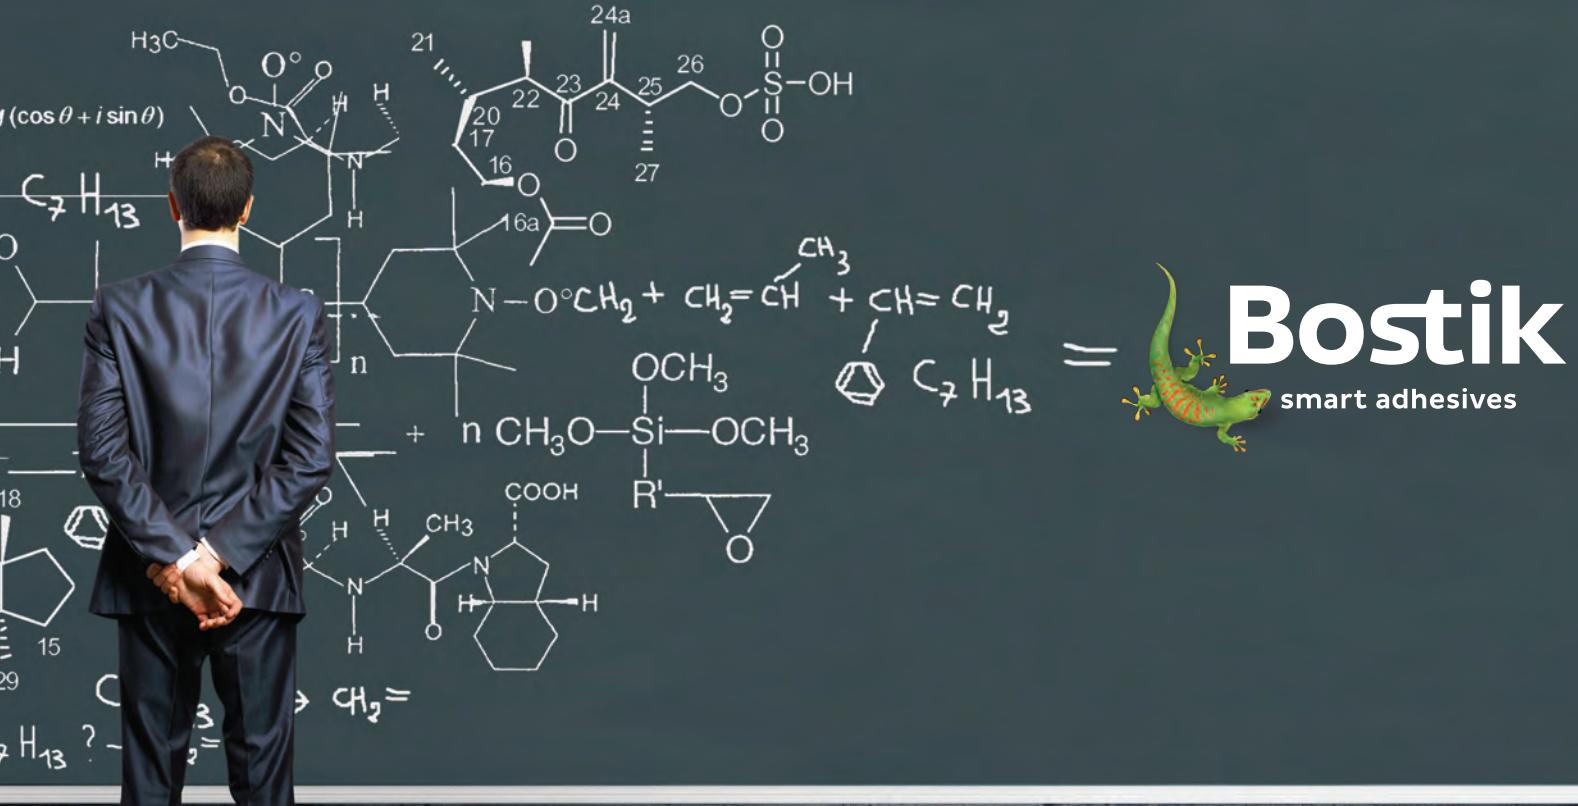

## Tile and Stone Installation Guide

Product Name	Description	Tile Types	Substrates	Specification
<b>Self-Leveling Underlays</b>				
SL-200™	Ultra-fluid self-smoothing underlayment	N/A	1, 2, 5, 7	--
SL-175™	Premium self-leveling underlayment & wear layer	N/A	1, 2, 5, 7	--
SL-150™	Fast setting self-leveling underlayment	N/A	1, 2, 5, 7	--
SL-GYP™	Hybrid gypsum-based self-leveling underlayment	N/A	1, 2, 5, 7	--
SL-100™	Self-leveling underlayment	N/A	1, 2, 5, 7	--
SL-Primer™	Self-leveling underlayment primer	N/A	1, 2	--
Universal Primer™ Pro	Self-leveling underlayment primer	N/A	1, 2, 4, 5	--
BostiMat™	Fiber reinforcement matrix sheet	N/A	1, 2, 5, 7	--
<b>Patches</b>				
UltraFinish™ Pro	Premium Portland cement patch	N/A	1, 2, 4, 5, 6**, 7	--
UltraRamp™	Premium Portland cement ramping patch	N/A		--
Webcrete® 98	Premium, fast-setting, polymer modified portland cement patch	N/A	1, 2, 4, 5, 6, 7	--
Webcrete® 95	A fast-setting, high strength floor patch	N/A	1, 2, 4, 5, 6**, 7	--
Webpatch® D-9001™	Fast-setting polymer-modified gypsum patch	N/A	2, 3, 4	--
<b>Moisture Vapor Barrier Coatings</b>				
Slab-Cote™	Extreme moisture vapor barrier coating	N/A	2	ASTM F3010-13
D-250™	Moisture vapor barrier coating	N/A	2	--
<b>Waterproofing Membranes</b>				
Ultra-Set® Advanced	Waterproofing, sound reducing and anti-fracture membrane	A, B, C, D, E, F, G, H	1, 2, 3, 4, 5, 6, 7, 8, 9	A118.10 & A118.12
GoldPlus™	Latex waterproofing and anti-fracture membrane	N/A	1, 2, 3, 4, 5, 9	A118.10 & A118.12
Black-Top™	Waterproofing and anti-fracture membrane	N/A	1, 2, 3, 4, 5, 6, 7, 9	A118.10 & A118.12

\*\* Mixed with 425™ admixture



## Dimension<sup>®</sup> RapidCure™



### GLASS FILLED, PRE-MIXED URETHANE GROUT

Dimension® RapidCure™ is a pre-mixed, water based, urethane grout offering the ultimate in color accuracy, water resistance and stain/crack protection. This grout contains Bostik's HXD™ Technology resin system, and is the world's first glass-based, pre-mixed grout.

Dimension® RapidCure™ is ideally suited for glass, metal, natural stone and even porcelain tile installations where the subtle sparkle of reflective light brings an elegant sophistication to the tile selection. It is a simple to install grout, designed to bring long lasting beauty and protection to grout joints with an easy installation experience. Simply stir, apply and clean as you go.

Dimension® RapidCure™ is approved for intermittent water exposure after only 3 days of cure.

#### DIMENSION® RAPIDCURE™

Item No.	Color	Code	Size	Barcode
GG18621Q	Amber	H621	18 lb	747224600936
GG9621B	Amber	H621	9 lb	747224601087
GG18660Q	Aquamarine	H660	18 lb	747224600981
GG9660B	Aquamarine	H660	9 lb	747224601131
GG18622Q	Aventurine	H622	18 lb	747224600943
GG9622B	Aventurine	H622	9 lb	747224601094
GG18710Q	Bronze	H710	18 lb	747224601032
GG9710B	Bronze	H710	9 lb	747224601186
GG18640Q	Citrine	H640	18 lb	747224600967
GG9640B	Citrine	H640	9 lb	747224601117
GG18720Q	Copper	H720	18 lb	747224601049
GG9720B	Copper	H720	9 lb	747224601193
GG18600Q	Diamond	H600	18 lb	747224600905
GG9600B	Diamond	H600	9 lb	747224601056
GG18671Q	Hematite	H671	18 lb	747224601001
GG9671B	Hematite	H671	9 lb	747224601155
GG18650Q	Jade	H650	18 lb	747224600974
GG9650B	Jade	H650	9 lb	747224601124
GG18670Q	Moonstone	H670	18 lb	747224600998
GG9670B	Moonstone	H670	9 lb	747224601148
GG18680Q	Onyx	H680	18 lb	747224601018
GG9680B	Onyx	H680	9 lb	747224601162
GG18610Q	Opal	H610	18 lb	747224600912
GG9610B	Opal	H610	9 lb	747224601063
GG18630Q	Palm Wood	H630	18 lb	747224600950
GG9630B	Palm Wood	H630	9 lb	747224601100
GG18700Q	Silver	H700	18 lb	747224601025
GG9700B	Silver	H700	9 lb	747224601179
GG18620Q	Topaz	H620	18 lb	747224600929
GG9620B	Topaz	H620	9 lb	747224601070

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
18 lb pail	18 lbs	80	1,440 lbs
9 lb pail	9 lbs	120	1,080 lbs



## COVERAGE RATES

Tile Size	18 LB. UNIT (FT <sup>2</sup> )								9 LB. UNIT (FT <sup>2</sup> )			
	1/16"	1/8"	3/16"	1/4"	5/8"	1/2"	1/16"	1/8"	3/16"	1/4"	5/8"	1/2"
1" x 1" x 1/4"	63	32	-	-	-	-	32	16	-	-	-	-
2" x 2" x 1/4"	126	63	-	-	-	-	63	32	-	-	-	-
3" x 6" x 1/4"	402	206	140	108	-	-	201	103	70	54	-	-
4" x 4" x 1/4"	382	196	134	102	-	-	191	98	67	51	-	-
4 1/4" x 4 1/4" x 5/16"	214	107	71	54	36	27	107	54	36	27	18	13
4" x 8" x 1/2"	168	84	56	42	28	21	84	42	28	21	14	11
6" x 6" x 1/2"	189	95	63	47	32	24	95	47	32	24	16	12
8" x 8" x 3/8"	337	168	112	84	56	42	168	84	56	42	28	21
12" x 12" x 1/4"	771	338	261	197	133	102	385	169	130	98	66	51
12" x 12" x 3/8"	505	253	168	126	84	63	253	126	84	63	42	32
13" x 13" x 3/8"	547	274	182	137	91	68	274	137	91	68	46	34
16" x 16" x 3/8"	673	337	224	168	112	84	337	168	112	84	56	42
18" x 18" x 3/8"	1153	580	388	293	197	149	576	290	194	146	98	74
18" x 18" x 5/16"	758	379	253	189	126	95	379	189	126	95	63	47
12" x 24" x 1/4"	2052	1032	692	522	352	267	1026	516	346	261	176	133
12" x 24" x 3/8"	1026	516	346	261	176	134	513	258	173	130	88	67
24" x 24" x 3/8"	1010	505	337	253	168	126	505	253	168	126	84	63

Average coverage per container - coverage will vary based on tile size, joint width and depth.

CONSISTENT COLOR  
EVERY TIME

NO SEALING REQUIRED

3 DAY WATER EXPOSURE



## TruColor® RapidCure™

### PREMIUM, PRE-MIXED URETHANE GROUT

TruColor® RapidCure™ Premium, Pre-Mixed Grout is a water-based grout offering the ultimate in color accuracy, water resistance, and stain and crack protection. This grout also contains Bostik's HXD™ Technology resin system. HXD™ technology enables only Bostik to offer the highest performance resin system of any pre-mixed grout available. The resin system is the most important factor in grout performance. This breakthrough in polymer chemistry enables Bostik premium, pre-mixed grouts to offer unmatched toughness, water and stain resistance. It's no surprise that Bostik is the most specified pre-mixed grout in the architect and design community today.



### TRUCOLOR® RAPIDCURE™

Item No.	Color	Code	Size	Barcode
G922031Q	Alabaster	H189	18 lb	747224600677
G922032Q	Alabaster	H189	9 lb	747224600875
G922061Q	Almond	H153	18 lb	747224600615
G922062Q	Almond	H153	9 lb	747224600813
G922041Q	Antique White	H135	18 lb	747224600509
G922042Q	Antique White	H135	9 lb	747224600707
G922081Q	Champagne	H138	18 lb	747224600516
G922082Q	Champagne	H138	9 lb	747224600714
G922091Q	Char Black	H139	18 lb	747224600523
G922092Q	Char Black	H139	9 lb	747224600721
G922161Q	Classic Bone	H158	18 lb	747224600622
G922162Q	Classic Bone	H158	9 lb	747224600820
G922201Q	Delorean Gray	H160	18 lb	747224600639
G922202Q	Delorean Gray	H160	9 lb	747224600837
G922193Q	Flash Walnut	H141	18 lb	747224604378
G922194Q	Flash Walnut	H141	9 lb	747224604385
G922071Q	French Gray	H142	18 lb	747224600530
G922072Q	French Gray	H142	9 lb	747224600738
G922191Q	Jamoca	H162	18 lb	747224600646
G922192Q	Jamoca	H162	9 lb	747224600844
G922111Q	Kahlua Cream	H143	18 lb	747224600547
G922112Q	Kahlua Cream	H143	9 lb	747224600745
G922021Q	Latte	H192	18 lb	747224600684
G922022Q	Latte	H192	9 lb	747224600882
G922131Q	Linen	H163	18 lb	747224600653
G922132Q	Linen	H163	9 lb	747224600851
G922051Q	Misty Gray	H144	18 lb	747224600554
G922052Q	Misty Gray	H144	9 lb	747224600752
G922141Q	Mobe Pearl	H145	18 lb	747224600561
G922142Q	Mobe Pearl	H145	9 lb	747224600769
G922101Q	Natural	H146	18 lb	747224600578
G922102Q	Natural	H146	9 lb	747224600776
G922151Q	Portabella	H184	18 lb	747224600660
G922152Q	Portabella	H184	9 lb	747224600868
G922171Q	Sand Beige	H148	18 lb	747224600585
G922172Q	Sand Beige	H148	9 lb	747224600783
G922121Q	Shadow	H195	18 lb	747224600691
G922122Q	Shadow	H195	9 lb	747224600899
G922181Q	Summer Wheat	H150	18 lb	747224600592
G922182Q	Summer Wheat	H150	9 lb	747224600790
G922011Q	White	H152	18 lb	747224600608
G922012Q	White	H152	9 lb	747224600806
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
18 lb pail	18 lbs	50	1,080 lbs	
9 lb pail	9 lbs	100	900 lbs	



## Hydroment® Vivid™



### RAPID CURING HIGH PERFORMANCE GROUT

Hydroment® Vivid™ is a rapid curing, premium grade, cement-based grout for demanding commercial and residential projects. Hydroment® Vivid™ offers consistent color technology with enhanced stain and efflorescence protection. It is both fiber reinforced and rapid curing, which offers early strength development for demanding, high performance installations. Hydroment® Vivid™ exceeds requirements of ANSI A118.7 and contains Bostik's Blockade™ Antimicrobial Protection. For use in grout joints from 1/16" to 1/2" wide.



HyDrix™ Technology allows Bostik to precisely control the curing process and the


development of the internal matrix of the Hydroment® Vivid™ grout.



#### HYDROMENT® VIVID™

Item No.	Color	Code	Size	Barcode
G00828-V25	Alabaster	H189	25 lb	747224603555
G00840-V25	Almond	H153	25 lb	747224603777
G00836-V25	Alpine White	H183	25 lb	747224603692
G00820-V25	Antique White	H135	25 lb	747224604415
G00844-V25	Brick	H136	25 lb	747224605092
G00812-V25	Bright White	H177	25 lb	747224603258
G00823-V25	Buff	H188	25 lb	747224603456
G00824-V25	Cashmere	H178	25 lb	747224603470
G00839-V25	Champagne	H138	25 lb	747224603753
G00821-V25	Char Black	H139	25 lb	747224603418
G00842-V25	Classic Bone	H158	25 lb	747224603814
G00817-V25	Clay	H197	25 lb	747224603357
G00829-V25	Delorean Gray	H160	25 lb	747224603579
G00810-V25	Flash Walnut	H141	25 lb	747224604392
G00831-V25	French Gray	H142	25 lb	747224603593
G00826-V25	Heron Blue	H171	25 lb	747224603517
G00818-V25	Jamoca	H162	25 lb	747224603371
G00819-V25	Kahlua Cream	H143	25 lb	747224603395
G00841-V25	Latte	H192	25 lb	747224603791
G00830-V25	Linen	H163	25 lb	747224604439
G00815-V25	Lunar	H196	25 lb	747224603319
G00827-V25	Misty Gray	H144	25 lb	747224603531
G00835-V25	Mobe Pearl	H145	25 lb	747224603678
G00837-V25	Natural	H146	25 lb	747224603715
G00825-V25	Peaches & Cream	H147	25 lb	747224603494
G00822-V25	Portabella	H184	25 lb	747224603432
G00834-V25	Sand Beige	H148	25 lb	747224603654
G00843-V25	Shadow	H195	25 lb	747224603838
G00811-V25	Silver Bullet	H168	25 lb	747224603234
G00816-V25	Steel	H200	25 lb	747224603333
G00813-V25	Storm	H198	25 lb	747224603272
G00832-V25	Summer Wheat	H150	25 lb	747224603616
G00838-V25	Taupe	H151	25 lb	747224603739
G00814-V25	Timber	H199	25 lb	747224603296
G00833-V25	White	H152	25 lb	747224603630

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
25 lb bag	25 lbs	48	1,200 lbs

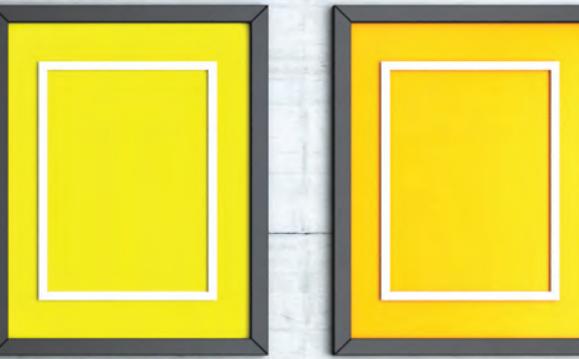
**HYDROMENT® CERAMIC TILE GROUT™ (SANDED)**

Item No.	Color	Code	Size	Barcode	Case Code
G96759-15	Alabaster	H189	25 lb	747224157591	--
G96759-35	Alabaster	H189	4 x 9 lb*	747224357595	10747224357592
G96265-15	Almond	H153	25 lb	747224265159	--
G96265-35	Almond	H153	4 x 9 lb*	747224265357	10747224265354
G96757-15	Alpine White	H183	25 lb	747224157577	--
G96757-35	Alpine White	H183	4 x 9 lb*	747224357571	10747224357578
G00670-16	Antique White	H135	25 lb	747224670151	--
G00670-35	Antique White	H135	4 x 9 lb*	747224670359	10747224670356
G00641-16	Brick	H136	25 lb	747224641151	--
G00641-35	Brick	H136	4 x 9 lb*	747224641359	10747224641356
G96115-15	Bright White	H177	25 lb	747224151155	--
G96115-35	Bright White	H177	4 x 9 lb*	747224351159	10747224351156
G96116-15	Buff	H188	25 lb	747224151162	--
G96116-35	Buff	H188	4 x 9 lb*	747224351166	10747224351163
G00624-16	Cashmere	H178	25 lb	747224166241	--
G00624-35	Cashmere	H178	4 x 9 lb*	747224356246	10747224356243
G00672-16	Champagne	H138	25 lb	747224672155	--
G00672-35	Champagne	H138	4 x 9 lb*	747224672353	10747224672350
G00684-16	Char Black	H139	25 lb	747224684158	--
G00684-35	Char Black	H139	4 x 9 lb*	747224684356	10747224684353
G96114-15	Classic Bone	H158	25 lb	747224114150	--
G96114-35	Classic Bone	H158	4 x 9 lb*	747224114358	10747224114355
G00685-16	Clay	H197	25 lb	747224604200	--
G00685-35	Clay	H197	4 x 9 lb*	747224604217	10747224604214
G96635-15	Delorean Gray	H160	25 lb	747224635150	--
G96635-35	Delorean Gray	H160	4 x 9 lb*	747224635358	10747224635355
G00627-16	Flash Walnut	H141	25 lb	747224627155	--
G00627-35	Flash Walnut	H141	4 x 9 lb*	747224627353	10747224627350
G00668-16	French Gray	H142	25 lb	747224668158	--
G00668-35	French Gray	H142	4 x 9 lb*	747224668356	10747224668353
G96522-15	Heron Blue	H171	25 lb	747224522153	--
G96522-35	Heron Blue	H171	4 x 9 lb*	747224522351	10747224522358
G96284-15	Jamoca	H162	25 lb	747224284150	--
G96284-35	Jamoca	H162	4 x 9 lb*	747224284358	10747224284355
G00676-16	Kahlua Cream	H143	25 lb	747224676153	--
G00676-35	Kahlua Cream	H143	4 x 9 lb*	747224676351	10747224676358
G00622-16	Latte	H192	25 lb	747224166227	--
G00622-35	Latte	H192	4 x 9 lb*	747224356222	10747224356229
G96741-15	Linen	H163	25 lb	747224411587	--
G96741-35	Linen	H163	4 x 9 lb*	747224741356	10747224741353
G00681-16	Lunar	H196	25 lb	747224604187	--
G00681-35	Lunar	H196	4 x 9 lb*	747224604194	10747224604191
G00661-16	Misty Gray	H144	25 lb	747224661159	--
G00661-35	Misty Gray	H144	4 x 9 lb*	747224661357	10747224661354
G00673-16	Mobe Pearl	H145	25 lb	747224673152	--
G00673-35	Mobe Pearl	H145	4 x 9 lb*	747224673350	10747224673357
G00664-16	Natural	H146	25 lb	747224664150	--
G00664-35	Natural	H146	4 x 9 lb*	747224664358	10747224664355
G00677-16	Peaches & Cream	H147	25 lb	747224677150	--
G00677-35	Peaches & Cream	H147	4 x 9 lb*	747224677358	10747224677355
G96289-15	Portabella	H184	25 lb	747224152893	--
G96289-35	Portabella	H184	4 x 9 lb*	747224352897	10747224352894
G00625-16	Sand Beige	H148	25 lb	747224625151	--
G00625-35	Sand Beige	H148	4 x 9 lb*	747224625359	10747224625356
G00666-16	Shadow	H195	25 lb	747224166661	--
G00666-35	Shadow	H195	4 x 9 lb*	747224356666	10747224356663
G96648-15	Silver Bullet	H168	25 lb	747224648150	--
G96648-35	Silver Bullet	H168	4 x 9 lb*	747224648358	10747224648355
G00690-16	Steel	H200	25 lb	747224604224	--
G00690-35	Steel	H200	4 x 9 lb*	747224604231	10747224604238
G00695-16	Storm	H198	25 lb	747224604248	--
G00695-35	Storm	H198	4 x 9 lb*	747224604255	10747224604252
G00621-16	Summer Wheat	H150	25 lb	747224621153	--
G00621-35	Summer Wheat	H150	4 x 9 lb*	747224621351	10747224621358
G00675-16	Taupe	H151	25 lb	747224675156	--
G00675-35	Taupe	H151	4 x 9 lb*	747224675354	10747224675351
G00680-16	Timber	H199	25 lb	747224604163	--
G00680-35	Timber	H199	4 x 9 lb*	747224604170	10747224604177
G00611-16	White	H152	25 lb	747224611154	--
G00611-35	White	H152	4 x 9 lb*	747224356116	10747224356113

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
25 lb bag	25 lbs	96	2,400 lbs
4 x 9 lb bag*	36 lbs	36	1,296 lbs

\*Sold in full cases only



USE WITH MARBLE

USE IN SMALL JOINTS

UNSANDED, SO IT  
WON'T SCRATCH TILE

## Hydroment® UNSANDED Dry Tile Grout™

**FOR USE IN GROUT  
JOINTS UP TO 1/8"**

Bostik Hydroment® Dry Tile Grout™ (Unsanded) is formulated from select grades of ground quartz, Portland cement, colorfast pigments and other special proprietary ingredients. It provides superior strength and durability with a wide variety of tiles. Exceeds ANSI A118.6 when mixed with water and A118.7 when mixed with Bostik 425™ Multi-Purpose Acrylic Latex Admixture. For use in grout joints up to 1/8".

### HYDROMENT® DRY TILE GROUT™ (UNSANDED)

Item No.	Color	Code	Size	Barcode	Case Code
G97759-17	Alabaster	H189	25 lb	747224759177	--
G97759-22	Alabaster	H189	6 x 5 lb*	747224227591	10747224227598
G97265-17	Almond	H153	25 lb	747224604538	--
G97265-22	Almond	H153	6 x 5 lb*	747224265227	10747224265224
G97757-17	Alpine White	H183	25 lb	747224757173	--
G97757-22	Alpine White	H183	6 x 5 lb*	747224227577	10747224227574
G00770-17	Antique White	H135	25 lb	747224770172	--
G00770-22	Antique White	H135	6 x 5 lb*	747224770226	10747224770223
G00741-22	Brick	H136	6 x 5 lb*	747224741226	10747224741223
G97115-17	Bright White	H158	25 lb	747224115171	--
G97115-22	Bright White	H158	6 x 5 lb*	747224221155	10747224221152
G97116-22	Buff	H188	6 x 5 lb*	747224221162	10747224221169
G00724-22	Cashmere	H178	6 x 5 lb*	747224227249	10747224227246
G00772-17	Champagne	H138	25 lb	747224772176	--
G00772-22	Champagne	H138	6 x 5 lb*	747224772220	10747224772227
G00784-17	Char Black	H139	25 lb	747224784179	--
G00784-22	Char Black	H139	6 x 5 lb*	747224784223	10747224784220
G97114-17	Classic Bone	H158	25 lb	747224114174	--
G97114-22	Classic Bone	H158	6 x 5 lb*	747224114228	10747224114225
G97240-17	Clay	H197	25 lb	747224604347	--
G97240-22	Clay	H197	6 x 5 lb*	747224604354	10747224604351
G97635-17	Delorean Gray	H160	25 lb	747224635174	--
G97635-22	Delorean Gray	H160	6 x 5 lb*	747224635228	10747224635225
G00727-17	Flash Walnut	H141	25 lb	747224604460	--
G00727-22	Flash Walnut	H141	6 x 5 lb*	747224727220	10747224727227
G00768-17	French Gray	H142	25 lb	747224604477	--
G00768-22	French Gray	H142	6 x 5 lb*	747224768223	10747224768220
G97522-22	Heron Blue	H171	6 x 5 lb*	747224522221	10747224522228
G97284-17	Jamoca	H162	25 lb	747224604545	--
G97284-22	Jamoca	H162	6 x 5 lb*	747224284228	10747224284225
G00776-22	Kahlua Cream	H143	6 x 5 lb*	747224776228	10747224776225
G00722-17	Latte	H192	25 lb	747224177223	--
G00722-22	Latte	H192	6 x 5 lb*	747224227225	10747224227222
G97741-17	Linen	H163	25 lb	747224741172	--
G97741-22	Linen	H163	6 x 5 lb*	747224741226	10747224741223
G97230-17	Lunar	H196	25 lb	747224604323	--
G97230-22	Lunar	H196	6 x 5 lb*	747224604330	10747224604337
G00761-17	Misty Gray	H144	25 lb	747224761170	--
G00761-22	Misty Gray	H144	6 x 5 lb*	747224761224	10747224761221
G00773-17	Mobe Pearl	H145	25 lb	747224773173	--
G00773-22	Mobe Pearl	H145	6 x 5 lb*	747224773227	10747224773224
G00777-17	Peaches & Cream	H147	25 lb	747224777171	--
G00777-22	Peaches & Cream	H147	6 x 5 lb*	747224777225	10747224777222
G97289-22	Portabella	H184	6 x 5 lb*	747224222893	10747224222890
G00725-17	Sand Beige	H148	25 lb	747224604491	--
G00725-22	Sand Beige	H148	6 x 5 lb*	747224725226	10747224725223
G00766-17	Shadow	H195	25 lb	747224604521	--
G00766-22	Shadow	H195	6 x 5 lb*	747224227669	10747224227666
G97648-17	Silver Bullet	H168	25 lb	747224604484	--
G97648-22	Silver Bullet	H168	6 x 5 lb*	747224648228	10747224648225
G97220-17	Steel	H200	25 lb	747224604309	--
G97220-22	Steel	H200	6 x 5 lb*	747224604316	10747224604313
G97210-17	Storm	H198	25 lb	747224604286	--
G97210-22	Storm	H198	6 x 5 lb*	747224604293	10747224604290
G00721-17	Summer Wheat	H150	25 lb	747224604507	--
G00721-22	Summer Wheat	H150	6 x 5 lb*	747224721228	10747224721225
G00775-17	Taupe	H151	25 lb	747224604514	--
G00775-22	Taupe	H151	6 x 5 lb*	747224775221	10747224775228
G97200-17	Timber	H199	25 lb	747224604262	--
G97200-22	Timber	H199	6 x 5 lb*	747224604279	10747224604276
G00719-17	White	H152	25 lb	747224719171	--
G00719-22	White	H152	6 x 5 lb*	747224719225	10747224719222

### Package Size      Weight/Unit      Units/Pallet      Weight/Pallet

25 lb bag	25 lbs	96	2,400 lbs
4 x 9 lb bag*	36 lbs	36	1,296 lbs

\*Sold in full cases only





## EzPoxy™ EzClean™

### 100% SOLIDS EPOXY MORTAR & GROUT

Bostik EzPoxy™ EzClean™ is a 100% Solids Epoxy Mortar & Grout with outstanding application and clean-up properties. This easy to use epoxy offers uniform color, exceptional durability, stain and sag resistance and never needs to be sealed. It is ideal for use in commercial and residential kitchens, lobbies, bathrooms, fast food restaurants, factories, shopping malls, steam rooms, swimming pools and fountains.

**As a mortar:** EzPoxy™ EzClean™ is a suitable bonding mortar for interior applications only. Use to set all ceramic, quarry, porcelain, granite, slate, pre-cast Terrazzo, dimensional stone tiles, and moisture sensitive stone.

**As a grout:** Use to grout all ceramic, quarry, porcelain, granite, slate, and pre-cast Terrazzo, dimensional stone tiles, for use in grout joints from 1/16" to 1/2" wide.



#### EZPOXY™ EZCLEAN™ – RESIN KIT

Item No.	Color/Part	Code	Size	Barcode
G93615	Resin Kit	--	Part A: 48 fl oz Part B: 15.5 fl oz	747224603852

#### EZPOXY™ EZCLEAN™ – SAND/COLORANT

Item No.	Color	Code	Size	Barcode
G93618	Alabaster	H189	1 pack*	747224603906
G93620	Almond	H153	1 pack*	747224603920
G93641	Alpine White	H183	1 pack*	747224604149
G93621	Antique White	H135	1 pack*	747224603937
G93642	Brick	H136	1 pack*	747224604156
G93622	Champagne	H138	1 pack*	747224603944
G93632	Char Black	H139	1 pack*	747224604040
G93617	Classic Bone	H158	1 pack*	747224603890
G93634	Clay	H197	1 pack*	747224604064
G93630	Delorean Gray	H160	1 pack*	747224604026
G93627	Flash Walnut	H141	1 pack*	747224603999
G93631	French Gray	H142	1 pack*	747224604033
G93624	Jamoca	H162	1 pack*	747224603968
G93623	Latte	H192	1 pack*	747224603951
G93619	Linen	H163	1 pack*	747224603913
G93638	Lunar	H196	1 pack*	747224604101
G93629	Misty Gray	H144	1 pack*	747224604019
G93628	Mobe Pearl	H145	1 pack*	747224604002
G93633	Portabella	H184	1 pack*	747224604057
G93626	Sand Beige	H148	1 pack*	747224603982
G93636	Silver Bullet	H168	1 pack*	747224604088
G93637	Steel	H200	1 pack*	747224604095
G93639	Storm	H198	1 pack*	747224604118
G93625	Summer Wheat	H150	1 pack*	747224603975
G93640	Taupe	H151	1 pack*	747224604132
G93635	Timber	H199	1 pack*	747224604071
G93616	White	H152	1 pack*	747224603883

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
Resin kit: Part A - 48 fl oz Part B - 15.5 fl oz	6.8 lbs	60	445 lbs
Sand/colorant	11.4 lbs	144	1,645 lbs

\*1 pack of sand/colorant must be ordered with EzPoxy™ EzClean™ Resin Kit (Part A+B)

New-To-The-World  
**TECHNOLOGY!**

## Bosti-Set™



### THIN PORCELAIN TILE PANEL ADHESIVE & SOUND REDUCTION MEMBRANE

Bosti-Set™ is a one-component, non-sag, easy to trowel adhesive that is specifically formulated for the installation of thin (gauged) porcelain tile panels on interior vertical surfaces or counter tops. Bostik's patent pending Tenirex™ Polymer Technology used in this product is a revolutionary, proprietary formulation found only in Bosti-Set™. Tenirex™ Polymer Technology provides the adhesive remarkable instant grab and holding power, enabling panels to be rapidly set on walls and repositioned for up to 30 minutes with no slip or sag. Bosti-Set™ requires only a single coat in application for faster and easier installation than a conventional mortar installation and holds thin porcelain tiles as large as 1/4" x 5' x 10' (6mm x 1.5m x 3m).



#### BOSTI-SET™

Item No.	Color	Size	Barcode	Case Code
G65890-BTS	Beige w/black specs	4 gal	747224605177	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	53.2 lbs	36	1,990 lbs	





## PRODUCT VIDEOS

# Now Available on Bostik's YouTube Channel:

### Bosti-Set™



### Hydroment® Vivid™



### Vertical Installation of Large Format Tile



**Watch for the video icon near products in this catalog.**

This icon signifies the product has a concise video message, efficiently communicating the product's key features and benefits.





## Glass-Mate™

### GLASS TILE MORTAR

Bostik Glass-Mate™ is a premium, polymer-modified, thin set mortar that exhibits superior bond strength, durability, non-sag properties and workability. Its bright white color and high polymer content make it ideal for setting individual glass tiles, sheet mounted glass tile, and most types of tile or natural stone in thin set applications over cement-based or masonry substrates.



## Reflex®

### ULTRA-PREMIUM POLYMER-MODIFIED MORTAR

Bostik Reflex® Ultra-Premium Polymer-Modified Mortar is for interior or exterior installations to set all types of porcelain, saltillo, ceramic, glass, granite, slate, marble, limestone, thin porcelain tiles, large porcelain panels and dimensional stone tiles. Reflex® has excellent mixing and application properties. Use over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced, Bostik Black-Top™, Bostik GoldPlus™, existing, well-bonded vinyl/VCT or ceramic tile and cutback adhesive residue (dry only).



## StoneWall™

### HIGH PERFORMANCE AND NON-SAG MORTAR

Bostik StoneWall™ is for interior or exterior, commercial or residential installations to set all types of porcelain, saltillo, ceramic, granite, slate, marble, limestone and dimensional stone tiles. StoneWall™ is formulated to prevent large bodied ceramic, porcelain and stone tiles from slipping in vertical applications. Bostik StoneWall™ is also suitable for installing floor tiles. Use over properly prepared concrete; structurally sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced, Bostik BlackTop™, Bostik GoldPlus™, existing, well-bonded vinyl composition tile (VCT) or ceramic tile; and cutback adhesive residue (dry only).



## Big Tile & Stone™

### POLYMER-MODIFIED LARGE AND HEAVY TILE MORTAR

Bostik Big Tile & Stone™ is a polymer-modified, large & heavy tile mortar used for interior or exterior installations to set all large sized ceramic, porcelain, granite, slate, marble, limestone, thin porcelain tiles, large porcelain panels and dimensional stone tiles. Bostik Big Tile & Stone™ may also be used for vertical applications. Use over structurally-sound: properly prepared concrete, exterior grade plywood (interior/dry use only), cementitious backer board, Bostik Ultra-Set® Advanced, Bostik Black-Top™, Bostik GoldPlus™ and existing, well-bonded vinyl composition tile (VCT) or ceramic tile. Big Tile & Stone™ may be used for uneven tile and stone thicknesses; or to minimize lippage. Big Tile & Stone™ white formulation is approved for non-sag applications for tiles up to 12" x 24".

MORTARS & THIN SETS				
Item No.	Color	Size	Barcode	Case Code
<b>Glass-Mate™</b>				
G00920-16G	White	25 lb	747224601223	--
G00920-37B	White	4 x 9 lb*	747224601599	10747224601596
<b>Reflex®</b>				
G00718-31A	White	50 lb	747224007186	--
G90918-31A	Gray	50 lb	747224009180	--
<b>StoneWall™</b>				
G00737-STW	White	50 lb	747224007377	--
<b>Big Tile &amp; Stone™</b>				
G00914-DR1	White	50 lb	747224009142	--
G00962-DR1	Gray	50 lb	747224009623	--
<b>Single-Flex® FS</b>				
G00913-33A	White	50 lb	747224265241	--
G00973-33A	Gray	50 lb	747224262240	--
<b>Single-Flex®</b>				
G00716-41A	White	50 lb	747224254245	--
G00916-41A	Gray	50 lb	747224257246	--
<b>Package Size</b>		<b>Weight/Unit</b>	<b>Units/Pallet</b>	<b>Weight/Pallet</b>
50 lb bag		50 lbs	48	2,400 lbs
25 lb bag		25 lbs	96	2,400 lbs
4 x 9lb box		36lbs	36	1,296 lbs

\*Sold in full cases only

MORTARS & THIN SETS				
Item No.	Color	Size	Barcode	Case Code
<b>Large Format Floor™</b>				
G00750-LFF	White	50 lb	747224604644	--
G00950-LFF	Gray	50 lb	747224604637	--
<b>Bostik PM™</b>				
G00717-29A	White	50 lb	747224273246	--
G00917-29A	Gray	50 lb	747224240347	--
<b>Ditra-Set™</b>				
G00919-DTM	White	50 lb	747224009197	--
G00925-DTM	Gray	50 lb	747224602305	--
<b>Tile-Mate® Premium</b>				
G00710-30A	White	50 lb	747224007100	--
G00760-30A	Gray	50 lb	747224250247	--
<b>Tile-Mate® Floor &amp; Wall</b>				
G00712-26A	White	50 lb	747224167347	--
G00762-26A	Gray	50 lb	747224267344	--
<b>Porcelain-Mate™</b>				
G00769-8C1	White	50 lb	747224007698	--
G00969-8C1	Gray	50 lb	747224009692	--
<b>Mud In A Bag™</b>				
G00268-OZ	Gray	50 lb	747224002686	--
<b>Package Size</b>		<b>Weight/Unit</b>	<b>Units/Pallet</b>	<b>Weight/Pallet</b>
50 lb bag		50 lbs	48	2,400 lbs
25 lb bag		25 lbs	96	2,400 lbs
4 x 9lb box		36lbs	36	1,296 lbs

\*Sold in full cases only



## Single-Flex® FS

### FAST SETTING PREMIUM MULTI-PURPOSE POLYMER-MODIFIED THIN SET MORTAR

Bostik Single-Flex® FS Fast Setting Premium Multi-Purpose Polymer-Modified Thin Set Mortar is for interior or exterior installations to set all types of ceramic, porcelain, granite, slate, marble, limestone, and dimensional stone tiles. Use over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced, Bostik Black-Top™ and Bostik GoldPlus™; and existing, well-bonded vinyl composition tile (VCT) or ceramic tile.



## Single-Flex®

### PREMIUM MULTI-PURPOSE POLYMER-MODIFIED THIN SET MORTAR

Bostik Single-Flex® Premium Multi-Purpose Polymer-Modified Thin Set Mortar is for interior or exterior installations to set all types of ceramic, porcelain, granite, slate, marble, limestone and dimensional stone. Use over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced, Bostik Black-Top™ and Bostik GoldPlus™; and existing, well-bonded vinyl composition tile (VCT) or ceramic tile.



## Large Format Floor™

### POLYMER-MODIFIED MORTAR FOR LARGE FORMAT CERAMIC FLOOR TILES

Bostik Large Format Floor™ is a polymer-modified mortar designed for floor installations of natural stone, granite, slate, marble, porcelain tiles and large format ceramic tiles. Use over properly prepared, structurally sound-concrete, exterior grade plywood (interior/dry use only); cementitious backer board and existing ceramic tile.



## Bostik PM™

### MULTI-PURPOSE POLYMER-MODIFIED THIN SET MORTAR

Bostik PM™ Multi-Purpose Polymer-Modified Thin Set Mortar is for interior or exterior installations to set all types of ceramic, porcelain, granite, slate, marble, limestone, and dimensional stone tiles. Use over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced, Bostik Black-Top™ and Bostik GoldPlus™; and existing, well-bonded vinyl composition tile (VCT) or ceramic tile.



## Ditra-Set™

### PORTLAND CEMENT AND LARGE AND HEAVY TILE MORTAR FOR SCHLUTER®-DITRA® SCHLUTER®-KERDI® AND UNCOUPLING AND WATERPROOFING MEMBRANES

Bostik Ditra-Set™ is composed of select, proprietary chemicals, carefully graded aggregates and purified cements. It provides outstanding workability, excellent durability, significant leveling characteristics and superior bond strengths in interior and exterior applications when used in conjunction with the Schluter®-DITRA® uncoupling membrane and Schluter®-KERDI® waterproofing membrane. Use Bostik Ditra-Set™ to install the membranes over substrates approved by Schluter®-Systems and to set ceramic, porcelain, and stone tile over Schluter®-DITRA® and Schluter®-KERDI®.



## Tile-Mate® Premium

### THIN SET MORTAR

Bostik Tile-Mate® Premium Thin Set Mortar is composed of select, proprietary chemicals, carefully graded aggregates and Portland cement. Bostik Tile-Mate® Premium Thin Set Mortar is pre-blended and ready to use. It provides superior bond strengths, excellent durability and outstanding workability. Bostik Tile-Mate® Premium Thin Set Mortar is for interior or exterior applications to set all types of ceramic, porcelain, granite, slate, marble, limestone, and dimensional stone tiles. Use over properly prepared concrete; structurally sound, exterior grade plywood\* (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced\*, Bostik Black-Top™\*\*, Bostik GoldPlus™\*\* and existing, well-bonded vinyl composition tile (VCT)\* or ceramic tile\*.



## Tile-Mate® Floor & Wall

### THIN SET MORTAR

Bostik Tile-Mate® Floor & Wall Thin Set Mortar is for interior or exterior installations to set all types of ceramic, porcelain\*, granite, slate, marble, limestone and dimensional stone tiles. Use over properly prepared concrete; structurally-sound, exterior grade plywood\* (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced, Bostik Black-Top™\*\*, Bostik GoldPlus™\*\* and existing, well-bonded vinyl/VCT\* or ceramic tile\*.



## Porcelain-Mate™

### POLYMER-MODIFIED PORTLAND CEMENT THIN SET MORTAR

Bostik Porcelain-Mate™ is for interior or exterior\*\* installations to set all types of ceramic, porcelain, granite, slate, marble, limestone and dimensional stone tiles. Use over properly prepared concrete, cement backer board, cured mortar beds, brick, cement block, and Bostik GoldPlus™.



## Mud-In-A-Bag™

### PRE-BLENDED FLOOR MUD

Bostik Mud-In-A-Bag™ is a pre-blended mixture of 4 parts sand to 1 part Portland cement for use in mortar beds from 3/4" to 4" thick. May be used as a mortar bed on floors and shower receptors. Use Bostik Mud-In-A-Bag™ wherever a traditional "mud bed" installation is desired on floors, countertops, showers, tubs, fountains, spas or decks.

For more information  
on **Bostik Mortars &**  
**Thin Sets**, scan this code:



\*Mixed with 425™ or Flex-A-Lastic™ admixtures \*\* Mixed with 425™ admixture

## 1900™

### EPOXY MODIFIED GROUT & MORTAR ADMIXTURE

Bostik 1900™ Epoxy Modified Grout and Mortar Admixture, when mixed with Bostik Hydroment® Ceramic Tile Grout™ (sanded only), is for interior and exterior installations to set and/or grout all ceramic, porcelain, quarry, granite, slate, marble, limestone and dimensional stone tiles. Exceeds ANSI A118.8.



EXCELLENT WORKABILITY

EASY CLEAN-UP

SUPERIOR CHEMICAL RESISTANCE

## 425™

### MULTI-PURPOSE ACRYLIC LATEX ADMIXTURE

Bostik 425™ Multi-Purpose Acrylic Latex Admixture is a high solids acrylic emulsion designed to improve the performance of Bostik Tile-Mate®, Hydroment® Ceramic Tile Grout™, Hydroment® Dry Tile Grout™, Single-Flex® FS, UltraFinish™ Pro and UltraRamp™, mortar and jobsite prepared mortar beds.



MORTAR ADMIXTURE & GROUT ADDITIVE

MINIMIZES CRACKING & REDUCES STAINING

USE INSTEAD OF WATER TO IMPROVE WATER RESISTANCE & DURABILITY

## Flex-A-Lastic®

### FLEXIBLE, HIGH SOLIDS, ACRYLIC MORTAR ADMIXTURE

Bostik Flex-A-Lastic® Admixture is a premium grade, high solids acrylic mortar admixture. When mixed with Bostik Tile-Mate® Thin Set Mortars, it becomes a flexible, high strength, freeze/thaw resistant mortar system for the interior and exterior setting of ceramic tile, porcelain tile, marble, granite and large dimensional stone. Flex-A-Lastic® is an ideal choice for installations requiring high bond strength and flexibility over conventional and unconventional substrates. It also provides tenacious grab making it ideal for vertical applications.



PROVIDES HIGH BOND STRENGTHS AND FLEXIBILITY

MEETS OR EXCEEDS ANSI A118.4 AND ANSI A118.11 WHEN MIXED WITH TILE MATE® THIN SET MORTARS

EXTREMELY TACKY CONSISTENCY—EXCELLENT FOR PORCELAIN TILES

### ADMIXTURES

Item No.	Size	Barcode	Case Code
<b>1900™</b>			
G01900-02-19R	Regular Unit Mix with 25 lb	747224019004	--
<b>425™</b>			
G00425-24	5 gal	747224425249	--
G00425-06	4x1gal/case*	747224425065	1074722425062
<b>Flex-A-Lastic®</b>			
G00447-23	5 gal	747224447340	--

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
5 gal	45 lb	36	1,616 lbs
4x1gal box*	39 lb	36	1,397 lbs

\*Sold in full cases only

# D-2001® Ultra-Premium™

## SUPERIOR PERFORMANCE CERAMIC TILE MASTIC

Bostik D-2001® Ultra-Premium™ Mastic is a high performance adhesive for the interior installation of all types of ceramic and stone tile (except moisture sensitive marble). Bostik D-2001® Ultra-Premium™ Mastic is ready to use for a fast, professional installation and provides excellent vertical grab for large bodied tiles. Bostik D-2001® Ultra-Premium™ Mastic exceeds the requirements of ANSI A136.1 Type I and II.



# Multi-Purpose™

## FLOOR & WALL MASTIC

Bostik Multi-Purpose™ Mastic is a high performance adhesive for the interior installation of most types of ceramic and stone tile (except moisture sensitive marble). Bostik Multi-Purpose™ Mastic is ready to use for a fast, professional installation and provides excellent vertical grab for large bodied tiles. Bostik Multi-Purpose™ Mastic exceeds the requirements of ANSI A136.1 Type I and II.



# Professional Grade™

## CERAMIC TILE MASTIC

Professional Grade™ Mastic is a high performance adhesive for the interior installation of most types of ceramic and stone tile (except moisture sensitive marble). Bostik Professional Grade™ Mastic is ready to use for a fast, professional installation and provides excellent vertical grab for large bodied tiles.



### MASTICS

Item No.	Size	Barcode	Case Code
<b>D-2001® Ultra Premium™</b>			
D70UP2	3.5 gal	747224329257	--
D71UP2	4x1 gal/case*	747224329219	10747224329216
<b>Multi-Purpose™</b>			
D70MP1	3.5 gal	747224398536	--
<b>Professional Grade™</b>			
D70PG5	3.5 gal	747224399250	--

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
3.5 gal pail	42 lb	48	2,400 lb
3.5 gal pail (Professional Grade)	54 lb	48	2,592 lb
4 x 1 gal*	53 lb	30	1,590 lb

\*Sold in full cases only

# SELF-LEVELING UNDERLAYMENTS

## Reference Guide

SL-200™

SL-175™

SL-150™

SL-100™

SL-Gyp™

Application Characteristics					
Thickness	1/8" - 1"	1/8" - 2"	1/4" - 1"	1/4" - 3"	1/4" - 2"
Extended Depth with Aggregate	No	5"	No	5"	No
Walkable	2 - 3 hours	1 - 2 hours	1 - 2 hours	2 - 3 hours	3 - 4 hours
Healing Time	45 minutes	20 minutes	15 minutes	20 minutes	20 minutes
Flow Cup (After 10 minutes)	16.3 cm	14.5 cm	13 cm	13.5 cm	13.8 cm
Install Hardwood Floor Coverings	16 hours	16 hours	16 hours	1 - 2 days	Minimum of 48 hours
Install Tile & Stone Floor Coverings	6 hours	6 hours	4 hours	1 - 2 days	Minimum of 48 hours
Install Resilient Floor Coverings	16 hours	12 hours	12 hours	1 - 2 days	Minimum of 48 hours
Wear Layer	No	Yes	No	No	No
Stainable	No	Yes	No	No	No
BostiMat™ Compatible	Yes	Yes	No	Yes	No
Moisture Limit	No Limit	No Limit	No Limit	No Limit	3 lbs / 75%RH
Pumpable	Yes	Yes	No	Yes	Yes
Strength Ratings					
Compressive Strength (28 days-ASTM C109)	5,500 psi	5,500 psi	5,500 psi	5,000 psi	5,000 psi
Flexural Strength (ASTM C348)	1,000 psi	1,100 psi	1,100 psi	1,000 psi	1,500 psi
Properties					
Chemistry	Cement	Cement	Cement	Cement	Gypsum / Cement Hybrid
Mold & Mildew Resistant	Yes	Yes	Yes	Yes	N/A
Exterior Use	No	No	No	No	No
Recycled Content	21%	21%	No	21%	No

\*Walkable, installation and healing times may vary due to depth of lift, temperature, humidity and other jobsite conditions

## SL-200™

### ULTRA-FLUID SELF-SMOOTHING UNDERLayment



SL-200™ is an ultra fluid, self-smoothing underlayment used in preparation of finished floor coverings. SL-200™ can be installed at 1/8" using a gauge rake and smoothing tool. The ultra fluid, single lift application increases production over multi-coat patching methods and leaves a smoother surface. SL-200™ can also be installed as a self-leveling underlayment up to 1" when a flat or level subfloor is desired. This breakthrough formulation can be easily installed by one person, working alone, due to its long open time and superior flow rate.



## SL-175™

### PREMIUM SELF-LEVELING UNDERLayment & WEAR LAYER

SL-175™ is a premium, cement-based, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its long working time, low shrinkage and superior leveling properties make it the ideal product for demanding applications on, above or below grade.



INSTALL FROM 1/8" TO 2" NEAT

WALKABLE IN 1 TO 2 HOURS

INSTALL FLOOR COVERING IN 6-16 HOURS



## SL-150™

### FAST SETTING SELF-LEVELING UNDERLayment

SL-150™ is a fast setting, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its working time, low shrinkage and superior leveling properties make it the ideal product for demanding applications on, above or below grade.



INSTALL FROM 1/4" TO 1" NEAT

WALKABLE IN 1 TO 2 HOURS

INSTALL FLOOR COVERING IN 4 TO 16 HOURS



## SL-Gyp™

### HYBRID GYPSUM-BASED SELF-LEVELING UNDERLayment

SL-Gyp™ is a premium, hybrid gypsum / cement-based, self-leveling underlayment that can be installed from 1/4" up to 2" thickness without extension. It is designed for use over distressed gypsum subfloors, light weight concrete, mud beds, structurally sound wood, adhesive residue and it is ideal for use on radiant or in-floor heating systems.

INSTALL FROM 1/4" TO 2" NEAT

WALKABLE IN 3 TO 4 HOURS

INSTALL FLOOR COVERING IN 2 DAYS



## SL-100™

### SELF-LEVELING UNDERLayment



SL-100™ is a cement-based, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its extended working time, low shrinkage and superior leveling properties make it the ideal product for renovation and new construction projects where next day flooring installations are not critical.



### SELF-LEVELING UNDERLAYMENTS

Item No.	Size	Barcode	Case Code	
<b>SL-200™</b>				
K102200	50 lbs	747224602435	--	
<b>SL-175™</b>				
K102175	50 lbs	747224602428	--	
K102175SS	2200 lb super sack	747224603166	--	
<b>SL-150™</b>				
G00270-F8	50 lbs	747224002709	--	
Product	Size	Weight/Unit	Units/Pallet	Weight/Pallet
SL-200™	50 lb bags	50 lbs	48 bags	2,400lbs
SL-175™	50 lb bags	50 lbs	48 bags	2,400lbs
SL-150™	50 lb bags	50 lbs	40 bags	2,000lbs

### SELF-LEVELING UNDERLAYMENTS

Item No.	Size	Barcode	Case Code	
<b>SL-Gyp™</b>				
K102125	50 lbs	747224602404	--	
K102125SS	2200 lb super sack	747224603180	--	
<b>SL-100™</b>				
K102100	50 lbs	747224602411	--	
K102100SS	2200 lb super sack	747224603173	--	
Product	Size	Weight/Unit	Units/Pallet	Weight/Pallet
SL-Gyp™	50 lb bags	50 lbs	48 bags	2,400lbs
SL-100™	50 lb bags	50 lbs	48 bags	2,400lbs

## UltraFinish™ Pro

### PREMIUM PORTLAND CEMENT REPAIR PATCH

UltraFinish™ Pro is a cement-based, rapid drying, trowelable repair patch and skimcoat that is used to smooth subfloors prior to the installation of finished floor coverings.

UltraFinish™ Pro allows for the installation of many floor coverings in as little as 15 minutes. It can be applied over properly prepared concrete, wood, cement-based terrazzo, VCT, ceramic, quarry tile, cutback and non-water soluble adhesive residue.



## UltraRamp™

### PREMIUM PORTLAND CEMENT RAMPING PATCH

UltraRamp™ is a rapid setting, cement-based, ramping patch with excellent workability that makes screeding, ramping or patching fast and easy. UltraRamp™ can be used over concrete, terrazzo, ceramic or quarry tile, epoxy coatings, non-water soluble adhesive residue and approved wood subfloors.



## Webpatch® D-9001

### FAST SETTING POLYMER-MODIFIED GYPSUM PATCH

Bostik Webpatch® D-9001 is a fast-setting, polymer-modified gypsum based material designed for interior installation and may be used to patch floors, walls, and other surfaces. Webpatch® D-9001 may be used to fill up to 1/2" deep over properly prepared concrete, masonry, cementitious backer board, and structurally sound exterior grade plywood (interior/dry use only). When used properly, this product provides a fast-setting surface that will not check, crack or break up.



# Webcrete® 98

PREMIUM, FAST-SETTING, POLYMER-MODIFIED,  
PORTLAND CEMENT PATCH

Bostik Webcrete® 98 is a premium, fast-setting, specially formulated, polymer-modified, Portland cement patch that is to be mixed with water only. Bostik Webcrete® 98 is designed for interior use on floors and walls. It can be used to skim-coat or featheredge up to 1/2" deep in one application. Floor covering can be installed after just one hour from application. When used as an embossing floor leveler, there is no need to mix Bostik Webcrete® 98 with a latex additive.



EXCELLENT SKIM-COATING,  
PATCHING & LEVELING

FEATHEREDGE FINISH

HIGH STRENGTH  
EMBOSS LEVELER

# Webcrete® 95

A FAST-SETTING, HIGH STRENGTH CEMENT PATCH

Bostik Webcrete® 95 is a fast-setting, polymer-modified, Portland cement patch for interior use on floors and walls. This product may be used to skim-coat or featheredge finish up to 1/2" deep in one application. Floor covering can be installed after just one hour from application. When mixed with Bostik 425™ Multi-purpose Acrylic Latex Admixture instead of water, not only is the performance and flexibility improved, but Bostik Webcrete 95® can also be used as an embossing leveler.



EXCELLENT SKIM-COATING,  
PATCHING & LEVELING

FEATHEREDGE FINISH

APPLY UP TO 1/2" DEPTH  
IN ONE APPLICATION

CHARACTERISTICS	Product	UltraFinish™ Pro		UltraRamp™		WebCrete® 98		Webcrete® 95		WebPatch® D-9001			
	Thickness min/max	Skim	Max 1/2"	Skim	Max 2"-5"*	Skim	Max 1/2"	Skim	Max 1/2"	Skim	Max 1/2"		
Final set	15 min	30 min	30 min	30 min	30 min	55 min	65 min	25 min	35 min	25 min	35 min		
Install hardwood	30 min	16 hrs	16 hrs	16 hrs	16 hrs	4 hrs	8 hrs	4 hrs	8 hrs	N/A			
Install Tile & Stone	15 min	30 min	1 hrs	1 hrs	2 hrs	4 hrs	2 hrs	4 hrs	4 hrs	N/A			
Install Resilient	15 min	30 min	1 hrs	1 hrs	4 hrs	8 hrs	4 hrs	8 hrs	2 hrs	4 hrs			
Use as a wear layer	No		Yes		No		No		No				
Moisture limit	8 lbs / 80% RH		8 lbs / 80% RH		No Limit		No Limit		3 lbs / 75% RH				
Chemistry	Cement		Cement		Cement		Cement		Gypsum				
Mold & Mildew Resistant	Yes		Yes		Yes		Yes		Yes				
Recycled Content	22%		21%		None		None		None				

\*2" neat, 5" with aggregate

## REPAIR PATCHES

Product	Item No.	Size	Barcode
UltraFinish™ Pro	K102300	10 lb bags, 4/case	747224602459
UltraRamp™	K102400	50 lb bag	747224602442
Webpatch® D-9001	D63020-912	25 lb bag	747224630209

## REPAIR PATCHES

Product	Item No.	Size	Barcode
Webcrete® 98	D63158-98R/982	25 lb bag	747224631589
Webcrete® 95	D63168-952	25 lb bag	747224631688

# Universal Primer™ Pro

## DEEP PENETRATING PRIMER

Universal Primer™ Pro is a premium, one component, interior acrylic primer designed for use with Bostik's line of underlays and patches. Universal Primer™ Pro's deep penetrating formulation can be used on a wide variety of substrates including concrete, wood, well bonded VCT, epoxy, tile, gypsum underlayment, cutback and other adhesive residues not affected by water. Universal Primer™ Pro is rapid drying and will adhere to both porous and non-porous substrates.

ENABLES ADHESION OF SELF-LEVELING UNDERLAYMENTS

LOW VOC, WATER-BASED FORMULATION

RAPID DRYING



# Slab-Cote™

## EXTREME MOISTURE VAPOR BARRIER COATING

Bostik Slab-Cote™ Extreme Moisture Vapor Barrier Coating is a single coat, two-component, 100% solids epoxy formulated to dramatically reduce moisture vapor transmission and surface alkalinity from substrates. Slab-Cote™ passes ASTM F 3010-13, moisture mitigation system for use under resilient flooring. It has 0 VOCs (as calculated per SCAQMD Rule 1168), low odor and is solvent-free. Slab-Cote's™ unique formulation displays a gel-like end of pot life indicator. Material left to cure in the pail will get hot, but will not smoke excessively.

SINGLE COAT, RAPID CURE, 100% SOLIDS EPOXY FORMULATION

FOR USE ON PROPERLY PREPARED CONCRETE - EVEN GREEN

DRAMATICALLY REDUCES MOISTURE VAPOR TRANSMISSION & PH LEVELS FROM SUBSTRATES



## PRIMERS

Item No.	Size	Barcode	Case Code
<b>Universal Primer™ Pro</b>			
K102500	4 x 1 gal/case*	747224603194	10747224603194
K102550	5 gallon pail	747224603203	--
<b>SL-Primer™</b>			
G18350-PJS	4 x 1 gal/case*	747224605351	10747224605440
G18340-PAS	4 gallon pail	747224605344	--

# SL-Primer™

## SELF-LEVELING UNDERLayment PRIMER

Bostik SL-Primer™ is designed for use with Bostik's line of underlays and patches. SL-Primer™ is a high solids, acrylic primer that seals porous substrates and facilitates bond of the underlayment to the subfloor. SL-Primer™ can be used over concrete and approved plywood substrates.

IMPROVES ADHESION ON POROUS SUBSTRATES

FAST DRYING

HIGH SOLIDS, ACRYLIC FORMULATION



# D-250™

## MOISTURE VAPOR BARRIER COATING

Bostik D-250™ is a high performance, rapid drying, water-based, penetrating epoxy formulated to dramatically reduce moisture vapor transmission and surface alkalinity from substrates. D-250™ is a low odor, non-flammable, 2-part system. It is pigmented green for visual indication of coverage and film thickness during the installation process. D-250™ is a one or two coat solution depending on conditions.

TWO-COMPONENT, WATER-BASED EPOXY

BOSTIK'S BLOCKADE® ANTIMICROBIAL PROTECTION

REDUCES MOISTURE VAPOR TRANSMISSION



## MOISTURE VAPOR BARRIER COATINGS

Item No.	Size	Barcode	Case Code
<b>Slab-Cote™</b>			
D64125	1 gallon kit	747224603227	--
<b>D-250™</b>			
D64010	1 gallon kit	74722460109	--



# BostiMat™

## FIBER REINFORCEMENT MATRIX SHEET

BostiMat™ creates a super strong web of fiber reinforcement throughout the self-leveling underlayment. BostiMat™ imparts a tremendous increase in tensile and flexural strength within the self leveling underlays.



## Self Leveling Tool Kit

### TOOLS FOR SELF LEVELING APPLICATIONS

Simplify your installation with the proper tools. The self leveling tool installation kit includes the following items:

- Mixing barrel
- Mixing paddle
- Measuring pitcher
- 3 piece aluminum handle
- 24" gauge rake head
- Finishing smoother
- Spiked sandals



### BOSTIMAT™

Item No.	Size	Barcode	Case Code
K102450	800 sf roll	747224603210	--

### COLOMIX MIXER

Item No.	Size	Barcode	Case Code
K321900	32" x 24" x 56" box, 150 lbs	--	--

# Collomix Mixers

## LEVIMIX 65 MOBILE MIXER AND XO4 DRILL

The LevMix 65 mobile mixer and Xo4 drill make the blending of self-leveling underlays fast, easy and accurate. The LevMix 65 has been engineered to combine and simplify the three installation steps of mixing, transporting and pouring into one mobile, mixing unit. The user will also save time by mixing up to three, 50lb bags at once.

The Xo4 drill is powerful and comes with a special mixing paddle designed specifically for self-levelers.

Both drills help to ensure your mixtures are lump and residue-free and properly mixed without excessive air entrainment.




## Leveling Pins

### PINS FOR SELF LEVELING APPLICATIONS

Bostik leveling pins help to ensure consistency and accuracy of your pour depths. One side is graduated in inches from 3/16" to 2-1/2", while the flip side is graduated in millimeters from 5mm to 65 mm.

- Self-adhering
- Provides visual guide
- Sold in packs of 50
- Cut to desired height and apply to substrate

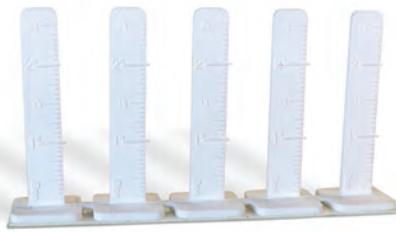

### SELF LEVELING TOOLKIT

Item No.	Size	Barcode	Case Code
K351925	18.5 lb unit	747224604453	--

### LEVELING PINS

Item No.	Size	Barcode	Case Code
K351930	2.5" (65mm) pins, 50/bag	743153822890	--

# Ultra-Set® Advanced

## WATERPROOFING, SOUND REDUCING AND CRACK ISOLATION

Ultra-Set® Advanced is a tenacious, one-part, trowel applied, elastomeric waterproofing/crack/sound isolation membrane and setting adhesive. Use Ultra-Set® Advanced as a waterproofing, crack, and sound isolation membrane over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; and existing, well-bonded vinyl/VCT or ceramic tile.



HIGH PERFORMANCE URETHANE FORMULA

BRIDGES CRACKS UP TO 1/8"

INTERIOR AND EXTERIOR USE, HORIZONTAL AND VERTICAL INSTALLATIONS

# GoldPlus™

## LATEX WATERPROOFING AND ANTI-FRACTURE MEMBRANE

GoldPlus™ is a ready-to-use, roller-applied, latex, waterproofing and anti-fracture membrane for use beneath thin set ceramic tile installations on vertical and horizontal surfaces. GoldPlus™ exceeds the requirements of ANSI A118.10 (specification for waterproof membranes beneath thin set tile and stone) and ANSI A118.12 specification for crack isolation membranes.

Use GoldPlus™ in commercial or residential applications. Apply over concrete, cement block walls, cement backer board, exterior grade plywood (interior, dry installations only) and mortar beds.



ROLLER-APPLIED FOR EASY APPLICATION

EXCEEDS ANSI A118.10 AND A118.12 FOR WATERPROOFING AND CRACK ISOLATION

1 HOUR DRYING TIME FOR FAST INSTALLATION

# Black-Top™

## WATERPROOFING AND ANTI-FRACTURE MEMBRANE

Bostik Black-Top™ is a liquid rubber-based, fabric reinforced, cold roller applied, flexible waterproofing and anti-fracture membrane. Use Black-Top™ as a waterproofing and/or anti-fracture membrane over properly prepared concrete; structurally-sound, exterior grade plywood (interior use only); cementitious backer board; and existing, well-bonded ceramic tile or cement terrazzo prior to the installation of ceramic or stone tile.



ROLLER APPLIED

EXCEEDS ANSI A118.10 AND A118.12

EXCEEDS ASTM C-836-89

## WATERPROOFING MEMBRANES

Item No.	Size	Barcode	Case Code
<b>Ultra-Set® Advanced</b>			
G60800-5G	5 gal	747224608055	--
G60800-UA2	2 gal	747224608024	--
A60820	12 x 20 oz/case*	747224602312	10747224602319
<b>GoldPlus™</b>			
G07800-RGC	3.5 gal	747224077011	--
G07800-RG1	4x1 gal*	747224077004	10747224077001
<b>Black-Top™</b>			
G92040	3' x 87' roll	747224604613	10747224304619
G92050	5 gal (208 ft unit)**	747224604651	10747224304657
G92060	4 x 6' x 87' roll*	747224604620	10747224304626

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
<b>Ultra-Set® Advanced</b>			
5 gal pail	55 lbs	27	1,500 lbs
2 gal pail	22 lbs	64	1,400 lbs
12 x 20 oz sausage*	24 lbs/case	100	2,430 lbs
<b>GoldPlus™</b>			
3.5 gal pail	40 lbs	27	1,080 lbs
4x1 gal*	44 lbs	20	915 lbs
<b>Black-Top™</b>			
3' x 87' roll	4 lbs	144	576 lbs
5 gal (208 ft unit)**	46 lbs	36	1,656 lbs
4 x 6' x 87' roll	3 lbs	150	450 lbs

\*Sold in full cases only

\*\*Liquid and fabric sold separately



## Bostik 915FS™

### FAST SETTING POLYURETHANE SEALANT

Bostik 915FS™ is a one-component, smooth fast setting polyurethane sealant/adhesive capable of dynamic joint movement totaling 70% of original joint geometry ( $\pm 35\%$ ). The sealant cures to a tough, flexible rubber when exposed to moisture present in the atmosphere. Bostik 915FS™ has physical properties that will remain relatively stable over time and in varying weather conditions.



## Tub & Tile Caulk™

### PREMIUM CAULK

Bostik Tub & Tile Caulk™ is a low-VOC, one-part, premium, siliconized-acrylic caulk provides a flexible seal that bonds to most common household surfaces. Bostik Tub and Tile Caulk™ is designed to complement Bostik grout colors.



## Bostik 955-SL™

### SELF-LEVELING POLYURETHANE SEALANT

Bostik 955-SL™ sealant is a one-component, traffic grade polyurethane, self leveling sealant capable of dynamic joint movement totaling 70% of original joint geometry ( $\pm 35\%$ ). The sealant cures to a tough, flexible rubber when exposed to moisture present in the atmosphere. Bostik 955-SL™ polyurethane has a pourable consistency. Its physical properties will remain relatively stable over time and in varying weather conditions.



## Pure Silicone™

### 100% SILICONE SEALANT

Bostik Pure Silicone™ Sealant is a specially formulated, one-component, 100% silicone sealant for a variety of substrates such as ceramic tile, slate, wood, metal, glass, fiberglass, laminate and plastic. For use as a flexible barrier between horizontal and vertical surfaces or any other changes in plane such as expansion joints in non-traffic areas, fixtures, tub surrounds, sinks, toilets, vanities, electrical plumbing penetrations, floors, walls and ceilings. 100% Pure Silicone™ is designed for use in interior, exterior, intermittent wet and dry installations. May also be used for hygiene seals in refrigeration and food preparation areas. 100% Pure Silicone™ has superior elongation and flexibility for use in change of plane joint applications.



## Heavy Duty

### CONSTRUCTION POLYURETHANE ADHESIVE - INTERIOR & EXTERIOR

Bostik Heavy Duty Construction Adhesive (HDA) is a one-component premium grade polyurethane, that is specifically formulated for subfloor and floor joist assemblies, from site erected structures to factory constructed modular and mobile homes.



## Blaze™

### URETHANE GROUT HAZE CLEANER

Bostik Blaze™ Urethane Grout Haze Cleaner is an effective way to clean tile surfaces after installing urethane based grouts. It can be used to remove haze which may remain after urethane grout installation.

While urethane grout is typically easy to clean off the surface of most tiles, some surfaces create challenges that make it necessary to use a chemical-based cleaner to remove residual urethane film or haze. Surfaces that are more difficult to clean will benefit from the use of Blaze™.



## Grout Sealer & Colorant™

### SEALS & RESTORES OR CHANGES THE COLOR OF GROUT

Bostik Grout Sealer & Colorant™ is ideal for changing or restoring your grout color. It may be applied to sanded to unsanded cement grout.



## Hand & Tool Towels™

### EASY CLEAN TOWELS

Convenient pre-moistened towels for easy clean-up of hands or tools. Towels have different textures on each side to provide added ease of cleaning. These handy towels are the perfect accessory for quick clean-up on job sites.



## Texspar Plus

### GROUT CLEANER

An environmentally friendly, advanced formulation based on specially selected mineral polishing compounds, citrus fruit skins extracts and biodegradable surfactants. Texspar Plus offers quick removal of stubborn stains, grout haze, hard water deposits, oil, dirt, floor coatings, etc. May be used on new or existing tile and grout. Restores the natural beauty of the tile as it cleans.

CAULKS, SEALANTS & ADHESIVES					
Item No.	Color	Code	Size	Barcode	Case Code
<b>Pure Silicone™</b>					
G93206	Clear		6 x 10.1oz /case*	747224604361	10747224604368
G93207	White	H152	6 x 10.1oz /case*	747224602701	10747224602708
G93208	Classic Bone	H158	6 x 10.1oz /case*	747224602718	10747224602715
G93209	Alabaster	H189	6 x 10.1oz /case*	747224602725	10747224602722
G93210	Linen	H163	6 x 10.1oz /case*	747224602732	10747224602739
G93211	Almond	H153	6 x 10.1oz /case*	747224602749	10747224602746
G93212	Antique White	H135	6 x 10.1oz /case*	747224602756	10747224602753
G93213	Champagine	138	6 x 10.1oz /case*	747224602763	10747224602760
G93214	Latte	H192	6 x 10.1oz /case*	747224602770	10747224602777
G93215	Jamoca	H162	6 x 10.1oz /case*	747224602787	10747224602784
G93216	Summer Wheat	H150	6 x 10.1oz /case*	747224602794	10747224602791
G93217	Sand Beige	H148	6 x 10.1oz /case*	747224602800	10747224602807
G93218	Flash Walnut	H141	6 x 10.1oz /case*	747224602817	10747224602814
G93219	Mobe Pearl	H145	6 x 10.1oz /case*	747224602824	10747224602821
G93220	Misty Gray	H144	6 x 10.1oz /case*	747224602831	10747224602838
G93221	Delorean Gray	H160	6 x 10.1oz /case*	747224602848	10747224602845
G93222	Shadow	H195	6 x 10.1oz /case*	747224602855	10747224602852
G93223	French Gray	H142	6 x 10.1oz /case*	747224602862	10747224602869
G93224	Char Black	H139	6 x 10.1oz /case*	747224602879	10747224602876
G93225	Clay	H197	6 x 10.1oz /case*	747224602886	10747224602883
G93226	Timber	H199	6 x 10.1oz /case*	747224602893	10747224602890
G93227	Silver Bullet	H168	6 x 10.1oz /case*	747224602909	10747224602906
G93228	Steel	H200	6 x 10.1oz /case*	747224602916	10747224602913
G93229	Lunar	H196	6 x 10.1oz /case*	747224602923	10747224602920
G93230	Storm	H198	6 x 10.1oz /case*	747224602930	10747224602937
G93231	Taupe	H151	6 x 10.1oz /case*	747224602947	10747224602944
G93232	Alpine White	H183	6 x 10.1oz /case*	747224602954	10747224602951
<b>Tub &amp; Tile Caulk™</b>					
See order form	Sanded/Unsanded white & Sanded/Unsanded various	6 x 10.1oz /case*	Contact customer service for details		
<b>955-SL™</b>					
A71010	Limestone		12 x 28 oz /case*	747224710109	10747224710106

Heavy Duty Construction Adhesive					
Item No.	Color	Size	Barcode	Case Code	
A69910	Natural	12 x 10.1oz /case*	747224699107	10747224699104	
A69920	12 x 28 oz /case*	Natural	747224699206	10747224699203	
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet		
10.1 oz cartridge*	15 lbs/case	96	805 lbs		
28 oz cartridge*	26 lbs/case	60	1,335 lbs		

\*Sold in full cases only

CAULKS, SEALANTS & ADHESIVES (CONTINUED)					
Item No.	Size	Color	Barcode	Case Code	
<b>915FS™</b>					
A77800	24 x 10.1oz /case*	White	747224900012	10747224900019	
A77860	24 x 10.1oz /case*	Antique White	747224900029	10747224900026	
A77890	24 x 10.1oz /case*	Light Gray	747224900036	10747224900033	
A77820	24 x 10.1oz /case*	Stone	747224900043	10747224900040	
A77870	24 x 10.1oz /case*	Aluminum Gray	747224900050	10747224900057	
A77880	24 x 10.1oz /case*	Limestone	747224900067	10747224900064	
A77805	24 x 10.1oz /case*	Capitol Tan	747224900074	10747224900071	
A77830	24 x 10.1oz /case*	Med Bronze	747224900081	10747224900088	
A77850	24 x 10.1oz /case*	Bronze	747224900098	10747224900095	
A77810	24 x 10.1oz /case*	Black	747224900104	10747224900101	
A77840	24 x 10.1oz /case*	Terra Cotta	747224900111	10747224900118	
A77900	12 x 20 oz /case*	White	747224900128	10747224900125	
A77960	12 x 20 oz /case*	Antique White	747224900135	10747224900132	
A77990	12 x 20 oz /case*	Light Gray	747224900142	10747224900149	
A77920	12 x 20 oz /case*	Stone	747224900159	10747224900156	
A77970	12 x 20 oz /case*	Aluminum Gray	747224900166	10747224900163	
A77980	12 x 20 oz /case*	Limestone	747224900173	10747224900170	
A77905	12 x 20 oz /case*	Capitol Tan	747224900180	10747224900187	
A77930	12 x 20 oz /case*	Med Bronze	747224900197	10747224900194	
A77950	12 x 20 oz /case*	Bronze	747224900203	10747224900200	
A77910	12 x 20 oz /case*	Black	747224900210	10747224900217	
A77940	12 x 20 oz /case*	Terra Cotta	747224900227	10747224900224	
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet		
6 x 10.1oz cartridge*	6 lbs/case	145	870 lbs		
12 x 28 oz cartridge*	26 lbs/case	60	1,335 lbs		
24 x 10.1oz cartridge*	24 lbs/case	80	1,950 lbs		
12 x 20 oz sausage*	24 lbs/case	100	2,430 lbs		

\*Sold in full cases only

SPECIALTY PRODUCTS					
Item No.	Size	Barcode	Case Code		
<b>Grout Stain™</b>					
See order form	16 x 8 oz bottles/case	Contact customer service for available colors			
<b>Blaze™</b>					
HZBK128	4 x 1 gal/case*	747224151261	1074722415126		
HZBK24	12 x 24 oz/case*	747224251268	1074722425126		
<b>Ultimate™</b>					
G65639	6 tubs/case*	747224656018	10747224656015		
G65641	12 quarts/case*	747224656094	10747224656091		
<b>Hand &amp; Tool Towels™</b>					
K473072	6 tubs/case	747224730725	10747224730722		
<b>Texspar Plus</b>					
G60500	4 x 1 gal/case*	852675747861	688713042717		
G60525	12 x 1 qt/case*	852675747885	688713042694		
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet		
3 lb net, 4 lb gross / 16 oz can	4 lbs	N/A	N/A		
Texspar plus: 4 x 1 gal/case*	32 lbs/case	48 cases	1,600 lbs		
Texspar Plus: 12 x 1 qt/case*	25.2 lbs/case	50 cases	1,300 lbs		

\*Sold in full cases only

## **Quick Links:**

[bit.ly/BostikUSAYouTube](https://bit.ly/BostikUSAYouTube)  
[bit.ly/AxiosTechnology](https://bit.ly/AxiosTechnology)  
[bit.ly/DimensionGrout](https://bit.ly/DimensionGrout)  
[bit.ly/GroutCalculator](https://bit.ly/GroutCalculator)  
[bit.ly/BostikBinders](https://bit.ly/BostikBinders)  
[bit.ly/BostikMSDS](https://bit.ly/BostikMSDS)  
[bit.ly/Bosti-Set](https://bit.ly/Bosti-Set)



**Smart help:**  
**1-800-726-7845**

**Bostik, Inc.**

11320 W. Watertown Plank Road  
Wauwatosa, WI 53226  
[www.bostik.com/us](http://www.bostik.com/us)

