




# Full Line Catalog

FLOORING, WALL, AND FAÇADE INSTALLATION SYSTEMS

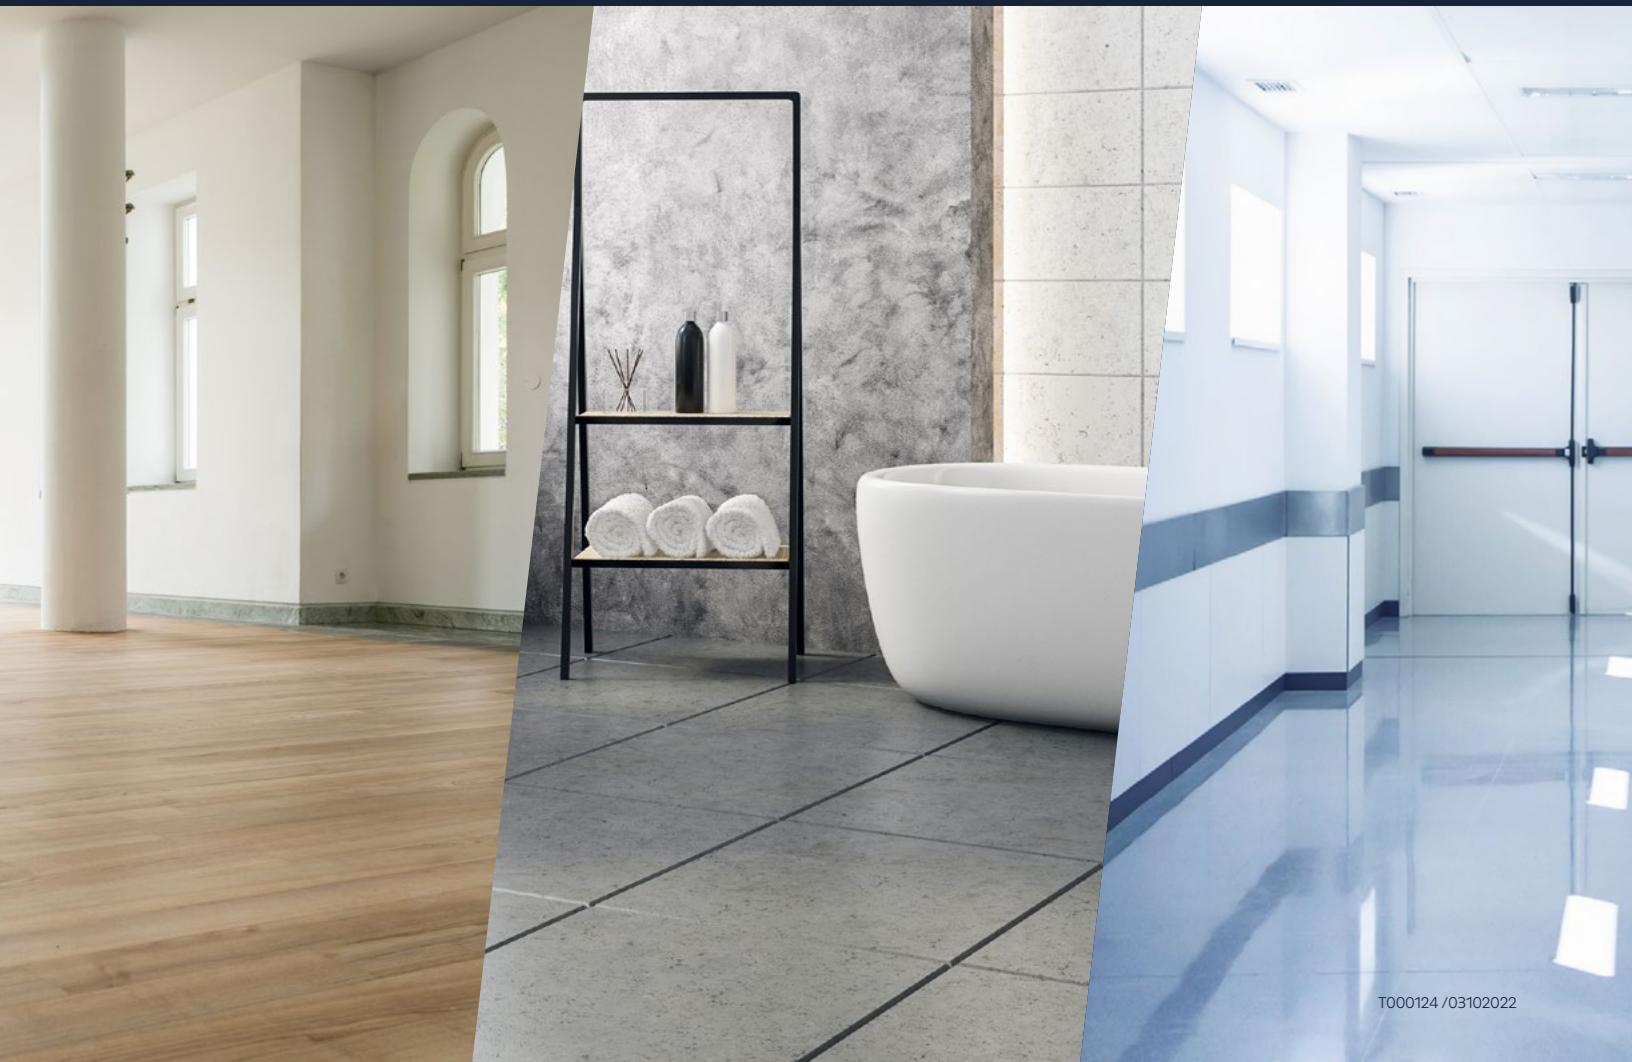

# Flooring System Solutions

**PROTECTION EVERY STEP OF THE WAY**

---


**Comprehensive Warranties and Full Installation Systems**

- Hardwood
- Resilient
- Tile & Stone
- Sealants
- Surface Preparation
- Concrete Repair



## Hardwood

Installation System




## Soft Flooring

Installation System



## Tile & Stone

Installation System



**Step One**  
Moisture Mitigation

Moisture mitigation is **not required** for adhesives with



**Step Two**  
Surface Prep



**Step Three**  
Adhesive or Mortar and Grout



**Warranty Available**

**Up to Lifetime Warranty!**

**Up to 25 Year Warranty!**

**Up to 25 Year Warranty!**

Above are representative system examples that work to cover many installation needs. Consult your local Bostik sales rep for help defining a system of products that best suits your specific installation and warranty protection needs.



To learn more about Bostik system warranties, scan this code or visit: [bit.ly/BostikWarranty](https://bit.ly/BostikWarranty)  
**1-800-726-7845 | [www.bostik.com/us](http://www.bostik.com/us)**



# Table of Contents

## Flooring Surface Preparation Solutions

Self-Leveling Underlayments	Page
SL-Rapid™	5
Self-Leveling Underlayments Reference Guide	6
SL-200™	7
SL-175™	8
SL-100™	8
SL-Gyp™	8
Primers	
TOTALPrime™	9
Universal Primer™ Pro	9
SL-Primer™	9
Repair Patches	
UltraFinish™ Pro	10
Webcrete® 98	11
Webcrete® 95	11
UltraRamp™	11
Webpatch® D-9001	11
Equipment	
Collomix Mixers	12
Self-Leveling Tool Kit	12
Leveling Pins	12

## Moisture Vapor Barrier Coatings, Waterproofing, and Crack-Isolation Membranes

Moisture Vapor Barrier Coatings	
Roll-Cote™	13
MVP4®	14
D-250™	14
Slab-Cote™	14
Waterproofing Membranes	
Ultra-Set® Advanced	15
Black-Top™	15
GoldPlus™	15

## Hardwood Installation Solutions

GreenForce®	16
Ultra-Set® SingleStep2™	17
Tech Feature: AXIOS™ Tri-Linking™	18
Tech Feature: Thickness Control™ Spacer Technology	18
Hardwood Reference Guide	19
Tech Feature: Moisture Vapor Control	20

## Hardwood Adhesives & Moisture Protection

Vapor-Lock™	21
Bostik's BEST®	21
Tech Feature: SoundGuard™	22
EFA+™	23
BST™	23
Pro-MSP™	23
Pro-Cure™	23
Wood-Tack™	23

## Cartridge Products

Climb™	24
Heavy Duty Construction Adhesive™	24
PWC	24

## Accessories

Ultimate™ Adhesive Remover	24
Cartridge Guns	24

## Soft Flooring Installation Solutions

### Resilient Adhesives

LOCK A699 PSA™	25
Soft Flooring Adhesives Comparison Chart	26
LOCK A490 LVT™	27
LOCK A499 PSA™	27
LOCK A799 TRANSITIONAL™	27
LOCK 485 MP™	27
LOCK P799 I/O RUBBER™	28
LOCK A195 VCT™	28
LOCK A100 COVE™	28
LOCK A285 MP™	28
LOCK A495 AERO™	28

## Substrate Preparation

COTE A985 ENCAPSULATOR	29
COTE A985 GYP	29

## Tile and Stone Installation Solutions

Tile and Stone Installation Guide	30
BAM™	31
Bostik's App	32
Specialty Adhesive	
Bosti-Set™	32
Mortars and Thin Sets	
Large Format Tile Installation Solutions	33
Glass-Mate™	34
Reflex®	34
StoneWall™	34
Big Tile & Stone™	34
Single-Flex® FS	34
Single-Flex®	34
Large Format Floor™	34
Bostik PM™	34
Porcelain-Mate™	34
Ditra-Set™	34
Tile-Mate® Premium	35
Tile-Mate® Floor & Wall	35
Tech Feature: RapidCure™ Product Line	35

## Admixtures

1900™	36
425™	36

## Mastics

D-2001® Ultra-Premium™	37
Multi-Purpose™	37
Professional Grade™	37

## Pre-Mixed Urethane Grout

Dimension® RapidCure™	38
TruColor® RapidCure™	39

## Epoxy & Mortar Grout

EzPoxy™ EzClean™	40
------------------	----

## Cement Grouts

Hydroment® Vivid™	41
Hydroment® Dry Tile Grout™ (Unsanded)	42
Hydroment® Ceramic Tile Grout™ (Sanded)	43

## Caulks, Sealants & Specialty Products

Grip N Grab™	44
Pure Silicone™	44
Tub & Tile Caulk™	44
Bostik 915FS™	44
Heavy Duty Construction Adhesive™	44
Blaze®	45
Grout Sealer & Colorant™	45
Ultimate™ Adhesive Remover	45
Cartridge Guns	45

## Wall Panel and Façade Installation Solutions

PanelTack HM™ Adhesive	46
PanelTack™ FoamTape™	47
Primer PanelTack™	47
Primer Q™	47
Primer MSP™	47

## BOSTIK HOTLINE™

**Smart help™**  
**1-800-726-7845**

### Bostik, Inc.

11320 W. Watertown Plank Road  
Wauwatosa, WI 53226  
[www.bostik.com/us](http://www.bostik.com/us)





# Surface Preparation Flooring Solutions

SELF-LEVELING UNDERLAYMENTS, PATCHES, SEALANTS,  
AND MOISTURE VAPOR BARRIER COATINGS

## SL-Rapid™

### RAPID SETTING SELF-LEVELING UNDERLAYMENT

SL-Rapid™ is a rapid-setting, cement-based, self-leveling and self-smoothing underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its rapid-setting properties, low shrinkage and superior leveling properties make it the ideal product for time sensitive applications on, above, or below grade.

The SL-Rapid™'s setting properties mean that thin-set ceramic tile can be installed as quickly as one hour after walkable. Additionally, moisture sensitive floor coverings such as wood, carpet, VCT, vinyl sheet goods, and rubber can generally be installed 4 hours after walkable.




SL-Rapid™			
Item No.	Size	Barcode	Units/Pallet
30613258	50 lb bag	747224606730	48 bags

INSTALL FLOOR COVERING  
IN 1 TO 4 HOURS

INSTALL FROM 1/8"  
TO 1" NEAT

UP TO 40% MORE FLUID THAN  
TRADITIONAL SELF-LEVELERS

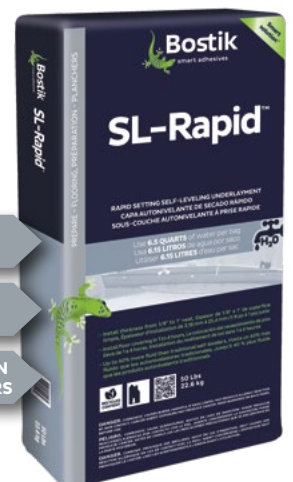

# SELF-LEVELING UNDERLAYMENTS

## Reference Guide

	SL-Rapid™	SL-200™	SL-175™	SL-100™	SL-Gyp™
<b>Application Characteristics</b>					
Thickness	1/8" - 1"	1/8" - 1"	1/8" - 2"	1/4" - 3"	1/4" - 2"
Extended Depth with Aggregate	No	No	5"	5"	No
Walkable	< 1 hour	2 - 3 hours	1 - 2 hours	2 - 3 hours	3 - 4 hours
Healing Time	20 minutes	45 minutes	20 minutes	20 minutes	20 minutes
Flow Cup (After 10 minutes)	15.5 cm	16.3 cm	14.5 cm	13.5 cm	13.8 cm
Install Hardwood Floor Coverings	4 hours	16 hours	16 hours	1 - 2 days	Minimum of 48 hours
Install Tile & Stone Floor Coverings	1 hour	6 hours	6 hours	1 - 2 days	Minimum of 48 hours
Install Resilient Floor Coverings	4 hours	16 hours	12 hours	1 - 2 days	Minimum of 48 hours
Wear Layer	No	No	Yes	No	No
Stainable	No	No	Yes	No	No
BostiMat™ Compatible	Yes	Yes	Yes	Yes	No
Moisture Limit	No Limit	No Limit	No Limit	No Limit	3 lbs / 75%RH
Pumpable	No	Yes	Yes	Yes	Yes
<b>Strength Ratings</b>					
Compressive Strength (28 days-ASTM C109)	5,500 psi	5,500 psi	5,500 psi	5,000 psi	5,000 psi
Flexural Strength (ASTM C348)	1,200 psi	1,000 psi	1,100 psi	1,000 psi	1,500 psi
<b>Properties</b>					
Chemistry	Cement	Cement	Cement	Cement	Gypsum / Cement Hybrid
Mold & Mildew Resistant	Yes	Yes	Yes	Yes	N/A
Exterior Use	No	No	No	No	No

Note: The performance of self-leveling underlayments may vary based upon depth of lift/pour, temperature, humidity and other conditions.

## Self-Leveling Underlayment Coverage Chart

PRODUCT	SL-Rapid™ & SL-200™						SL-175™ & SL-100™						SL-Gyp™					
	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1/8"	1/4"	3/8"	1/2"	3/4"	1"
100 ft <sup>2</sup>	2	4	5	7	10	14	2	4	6	8	12	16	3	5	7	10	14	19
500 ft <sup>2</sup>	9	17	25	34	50	67	10	20	30	40	60	80	12	23	35	46	69	91
1,500 ft <sup>2</sup>	26	51	75	101	150	201	30	60	90	120	180	240	35	69	103	137	205	273
2,000 ft <sup>2</sup>	34	67	100	134	200	267	40	80	120	160	240	320	46	91	137	182	273	364
3,000 ft <sup>2</sup>	51	101	150	201	300	401	60	120	180	240	360	480	69	137	205	273	410	546
4,000 ft <sup>2</sup>	67	134	200	267	400	534	80	160	240	320	480	640	92	182	273	364	546	728

## SL-200™

### ULTRA FLUID SELF-SMOOTHING UNDERLAYMENT

SL-200™ is an ultra fluid, self-smoothing underlayment used in preparation of finished floor coverings. SL-200™ can be installed at 1/8" using a gauge rake and smoothing tool. The ultra fluid, single lift application increases production over multi-coat patching methods and leaves a smoother surface. SL-200™ can also be installed as a self-leveling underlayment up to 1" when a flat or level subfloor is desired. This breakthrough formulation can be easily installed by one person, working alone, due to its long open time and superior flow rate.



SL-200™			
Item No.	Size	Barcode	Units/Pallet
30852214	50 lb bag	747224602435	48 bags



# SL-175™

## PREMIUM SELF-LEVELING UNDERLAYMENT & WEAR LAYER

SL-175™ is a premium, cement-based, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its long working time, low shrinkage and superior leveling properties make it the ideal product for demanding applications on, above or below grade.

SL-175™ is also a durable wear layer. When a natural concrete look is desired, topical stains, dyes and surface treatments further expand the decorative possibilities.



SL-175™			
Item No.	Size	Barcode	Units/Pallet
30852211	50 lb bag	747224602428	48 bags



INSTALL FROM 1/8" TO 1" NEAT

WALKABLE IN 1 TO 2 HOURS

INSTALL FLOOR COVERING IN 4 TO 12 HOURS

# SL-100™

## SELF-LEVELING UNDERLAYMENT

SL-100™ is a cement-based, self-leveling underlayment that can be used to create a smooth, flat or level surface prior to the installation of floor coverings. Its extended working time, low shrinkage and superior leveling properties make it the ideal product for renovation and new construction projects where next day flooring installations are not critical.




SL-100™			
Item No.	Size	Barcode	Units/Pallet
30852207	50 lb bag	747224602411	48 bags

# SL-Gyp™

## HYBRID GYPSUM-BASED SELF-LEVELING UNDERLAYMENT

SL-Gyp™ is a premium, hybrid gypsum / cement-based, self-leveling underlayment that can be installed from 1/4" up to 2" thickness without extension. It is designed for use over distressed gypsum subfloors, light weight concrete, mud beds, structurally sound wood, adhesive residue and it is ideal for use on radiant or in-floor heating systems.

SL-Gyp™ can also be used for certain low-prep applications where shot-blasting and mechanically cleaning substrates cannot be done.

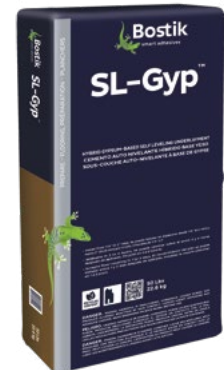

SL-Gyp™			
Item No.	Size	Barcode	Units/Pallet
30852209	50 lb bag	747224602404	48 bags



# Primers

## TOTALPrime™

MULTI-SURFACE BOND-ENHANCING PRIMER

Bostik's TOTALPrime™ is a ready-to-use, polymer-based primer designed for a variety of challenging substrates. TOTALPrime™ tenaciously bonds to non-porous substrates, like epoxy coatings and existing tiles. The bond-enhancing sand suspended in the formulation imparts superior mechanical adhesion. TOTALPrime™ provides a coarse textured surface ideal for enhancing the bond of mortars, self-leveling underlayment and patches, ensuring excellent adhesion even on challenging substrates (see TDS).



TotalPrime™				
Item No.	Color	Size	Barcode	Units/Pallet
30616235	Green	1 gallon pail	747224606785	100 pails
30616234	Green	3.5 gallon pail	747224606792	48 pails



PRIMERS

## Universal Primer™ Pro

DEEP PENETRATING PRIMER

Universal Primer™ Pro is a premium, one component, interior acrylic primer designed for use with Bostik's line of underlayments and patches. Universal Primer™ Pro's deep penetrating formulation can be used on a wide variety of substrates including concrete, wood, well bonded VCT, epoxy, tile, gypsum underlayment, cutback and other adhesive residues not affected by water. Universal Primer™ Pro is rapid drying and will adhere to both porous and non-porous substrates.



Universal Primer Pro™				
Item No.	Size	Barcode	Case Code	Units/Pallet
30619638	4 x 1 gallon case*	747224603197	10747224603194	36 cases
30619637	5 gallon pail	747224603203		36 pails

\*Sold in full cases only

## SL-Primer™

SELF-LEVELING UNDERLAYMENT PRIMER

Bostik SL-Primer™ is designed for use with Bostik's line of self-leveling underlayments and patches. SL-Primer™ is a high solids latex primer that seals porous substrates and facilitates bond of the underlayment to the subfloor. SL-Primer™ can be used over concrete and exterior-grade plywood substrates.



SL-Primer™				
Item No.	Size	Barcode	Case Code	Units/Pallet
30611029	1 gallon jug, 4 per case*	747224605351	10747224605440	36 cases
30610685	4 gallon pail,	747224605344	--	36 pails

\*Sold in full cases only

Repair Patch Product	UltraFinish™ Pro		UltraRamp™		Webcrete® 98		Webcrete® 95		WebPatch® D-9001	
Thickness min/max	Skim	Max 1/2"	Skim	Max 2"-5"*	Skim	Max 1/2"	Skim	Max 1/2"	Skim	Max 1/2"
Final set	15 min	30 min	30 min	30 min	55 min	65 min	25 min	35 min	25 min	35 min
Install Hardwood	30 min	16 hrs	4 hrs	16 hrs	4 hrs	8 hrs	4 hrs	8 hrs	N/A	
Install Tile & Stone	15 min	30 min	1 hrs	1 hrs	2 hrs	4 hrs	2 hrs	4 hrs	N/A	
Install Resilient	15 min	30 min	1 hrs	1 hrs	4 hrs	8 hrs	4 hrs	8 hrs	2 hrs	4 hrs
Use as a wear layer	No		Yes		No		No		No	
Moisture Limit	No Limit		No Limit		No Limit		No Limit		3 lbs / 75% RH	
Chemistry	Cement		Cement		Cement		Cement		Gypsum	
Mold & Mildew Resistant	Yes		Yes		Yes		Yes		Yes	
Recycled Content	2%		2%		None		None		None	

\*2" neat, 5" with aggregate

## Repair Patches

### UltraFinish™ Pro

#### PREMIUM PORTLAND CEMENT REPAIR PATCH

UltraFinish™ Pro is a cement-based, rapid drying, trowelable repair patch and skimcoat that is used to smooth subfloors prior to the installation of finished floor coverings.

UltraFinish™ Pro allows for the installation of many floor coverings in as little as 15 minutes. It can be applied over properly prepared concrete, wood, cement-based terrazzo, VCT, ceramic, quarry tile, cutback and non-water soluble adhesive residue.



APPLIES FROM A SKIM COAT TO 1/2"

INSTALL FLOORING IN 15 MINUTES

EXCELLENT FOR SKIM COATING OR PATCHING



#### UltraFinish™ Pro

Item No.	Size	Barcode	Units/Pallet
30616103	4 x 10 lb bag case*	747224602459	60 cases (240 bags)

\*Sold in full cases only

# Webcrete® 98

PREMIUM, FAST-SETTING, POLYMER-MODIFIED, PORTLAND CEMENT PATCH

Bostik Webcrete® 98 is a premium, fast-setting, specially formulated, polymer-modified, Portland cement patch that is to be mixed with water only. Bostik Webcrete® 98 is designed for interior use on floors and walls. It can be used to skim-coat or featheredge up to 1/2" deep in one application. Floor covering can be installed after just one hour from application. When used as an embossing floor leveler, there is no need to mix Bostik Webcrete® 98 with a latex additive.

EXCELLENT SKIM-COATING, PATCHING & LEVELING

FEATHEREDGE FINISH

HIGH STRENGTH EMOSS LEVELER



Webcrete® 98			
Item No.	Size	Barcode	Units/Pallet
30850614	25 lb bag	747224631589	96 bags

# Webcrete® 95

A FAST-SETTING, HIGH STRENGTH CEMENT PATCH

Bostik Webcrete® 95 is a fast-setting, polymer-modified, Portland cement patch for interior use on floors and walls. This product may be used to skim-coat or featheredge finish up to 1/2" deep in one application. Floor covering can be installed after just one hour from application. When mixed with Bostik 425™ Multi-purpose Acrylic Latex Admixture instead of water, not only is the performance and flexibility improved, but Bostik Webcrete 95® can also be used as an embossing leveler.

EXCELLENT SKIM-COATING, PATCHING & LEVELING

FEATHEREDGE FINISH

APPLY UP TO 1/2" DEPTH IN ONE APPLICATION



Webcrete® 95			
Item No.	Size	Barcode	Units/Pallet
30850616	25 lb bag	747224631688	96 bags

# UltraRamp™

PREMIUM PORTLAND CEMENT RAMPING PATCH

UltraRamp™ is a rapid setting, cement-based, ramping patch with excellent workability that makes screeding, ramping or patching fast and easy. UltraRamp™ can be used over concrete, terrazzo, ceramic or quarry tile, epoxy coatings, non-water soluble adhesive residue and approved wood subfloors.

APPLIES FROM A SKIMCOAT TO 2" NEAT, 5" PROPERLY EXTENDED

INSTALL FLOORING IN AS LITTLE AS ONE HOUR

IDEAL FOR SCREEDING, RAMPING, PATCHING & HEAVY SKIMCOATING



UltraRamp™			
Item No.	Size	Barcode	Units/Pallet
30852216	50 lb bag	747224602442	48 bags

# Webpatch® D-9001

FAST SETTING POLYMER-MODIFIED GYPSUM PATCH

Bostik Webpatch® D-9001 is a fast-setting, polymer-modified gypsum based material designed for interior installation and may be used to patch floors, walls, and other surfaces. Webpatch® D-9001 may be used to fill up to 1/2" deep over properly prepared concrete, masonry, cementitious backer board, and structurally sound exterior grade plywood (interior/dry use only). When used properly, this product provides a fast-setting surface that will not check, crack or break up.

REPAIRS MINOR IMPERFECTIONS IN FLOORS

HIGH STRENGTH AND CRACK RESISTANT

APPLY UP TO 1/2" DEPTH IN ONE APPLICATION



Webpatch® D-9001			
Item No.	Size	Barcode	Units/Pallet
30616790	25 lb bag	747224631589	96 bags

# Surface Preparation Equipment

## Collomix Mixers

### LEVMIx 65 MOBILE MIXER X04 DRILL & PADDLE

The LevMix 65 mobile mixer and Xo4 drill make the blending of self-leveling underlayments fast, easy and accurate. The LevMix 65 has been engineered to combine and simplify the three installation steps of mixing, transporting and pouring into one mobile, mixing unit. The user will also save time by mixing up to three, 50lb bags at once.

The Xo4 drill is powerful and comes with a special mixing paddle designed specifically for self-levelers.

Both drills help to ensure your mixtures are lump and residue-free and properly mixed without excessive air entrainment.



Levmix 65 Mobile Mixer			
Item No.	Size	Barcode	Units/Pallet
30852231	32" x 24" x 56" box, 150 lbs	--	--
X04 Drill & Paddle			
Item No.	Size	Barcode	Units/Pallet
30852234	24" x 14" x 8" box	--	--

## Self-Leveling Tool Kit

### TOOLS FOR SELF-LEVELING APPLICATIONS

Simplify your installation with the proper tools. This installation kit includes the following items:

- Mixing barrel
- Measuring pitcher
- 24" gauge rake head
- Spiked sandals
- Mixing paddle
- 3 piece aluminum handle
- Finishing smoother



Self-Leveling Tool Kit			
Item No.	Size	Barcode	Units/Pallet
30612668	14.1 lb unit	747224606716	12 kits

## Leveling Pins

Bostik leveling pins help to ensure consistency and accuracy of your pour depths.

- Self-adhering
- Cut to desired height and apply to substrate
- Provides visual guide
- One side is graduated in inches from 3/16" to 2-1/2", while the flip side is graduated in millimeters from 5mm to 65 mm
- Sold in packs of 50



Leveling Pins			
Item No.	Size	Barcode	Units/Pallet
30852233	2.5 in (65 mm) pins/50 lb bag	743153822890	10 bags/box, 4 boxes/carton

# Moisture Vapor Barrier Coatings

## Roll-Cote™

### HIGH-PERFORMANCE MOISTURE-VAPOR-BARRIER COATING AND PRIMER

Bostik Roll-Cote™ High-Performance Moisture Vapor Barrier Coating and Primer is a water-based, one-component system formulated to reduce substrate moisture vapor emissions, prime floors prior to the application of underlayments, and block concrete alkalinity. Roll-Cote™ significantly improves return-to-service speed for flooring installation by combining multiple steps into one product. Roll-Cote™ is suitable for use in many environments, is compatible with an assortment of flooring types, and can be used on both concrete and wood substrates. No mixing is required, and its easy-to-apply formulation and fast dry time makes Roll-Cote™ dependable and user-friendly. Roll-Cote™ is durable and low-odor, and the black color provides great visual indication of coverage during the installation process. Note: See the technical data sheet for compatible adhesives.



Roll-Cote™				
Item No.	Size	Units/Pallet	Barcode	Case Code
30619741	4 x 1 gal/case*	16 cases per pallet	747224607607	10747224607604
30619693	4 gal	36 pails per pallet	747224607614	--

\*Sold in full cases only



Type of Application	Application Tools	Substrate Type	Flooring / Adhesive Types	Dilution Ratio	Working Time	Shelf Life	Coats Required		Dry Film Thickness		Moisture Limit		Coverage		Dry Time
<b>Primer or Prime Coat</b>	3/8" nap roller or split-tip broom	Concrete, highly porous concrete	Self-leveling underlayments, floor patches, tile mortars, or prior to applications of Roll-Cote™	1 to 1 (with water by volume)	2-4 hours	12 months	One		--		--		500-800 ft <sup>2</sup> per gallon (of concentrate)		30 minutes
<b>Vapor Retarder</b>	3/8" nap roller	Plywood, high-performance subflooring panels	Glue-assist, floating floors, click-together floors	Undiluted	1-3 hours	12 months	One		4.1 mils		Wood substrate <15% per NWFA guidelines <sup>1</sup>		200 ft <sup>2</sup> per gallon		30 minutes
<b>Moisture-Vapor Barrier</b>	3/8" nap roller	Concrete	Self-leveling underlayments, floor patches, tile mortars, hardwood flooring adhesives & resilient adhesives <sup>2</sup>	Undiluted	1-3 hours	12 months	<b>One coat:</b> Required for 90% RH	<b>Two coats:</b> Required for 99% RH	<b>One coat:</b> 4.1 mil	<b>Two coats:</b> 8.2 mil	<b>One coat:</b> Up to 90% RH <sup>3</sup>	<b>Two coats:</b> Up to 99% RH <sup>3</sup>	<b>One coat:</b> 200 ft <sup>2</sup> per gallon	<b>Two coats:</b> 100 ft <sup>2</sup> per gallon	1st coat: 30 minutes, 2nd coat: 1 hour

**Read and understand technical and safety data sheets prior to installation.** See Roll-Cote™ technical data sheet for more information. <sup>1</sup>Moisture content of wood cannot exceed 15% per NWFA guidelines. <sup>2</sup>See flooring types on technical data sheet. <sup>3</sup>SLU or floor patch may be required for compatibility with resilient adhesives and to prevent telegraphing of substrate and surface imperfections. Contact Technical Service for more information.

# Moisture Vapor Barrier Coatings

## MVP4®

### MOISTURE VAPOR PROTECTION, ANTI-FRACTURE AND NOISE REDUCTION MEMBRANE

Bostik MVP4® Moisture Vapor Protection is a one-part, trowel applied, elastomeric, moisture cure urethane membrane designed to be used beneath glue-down installations of engineered, solid and bamboo hardwood flooring with Bostik's Best®, BST™, EFA+™, or Vapor-Lock™ adhesives. Bostik MVP4® is designed to reduce moisture vapor transmission from the subfloor, create a noise reduction barrier over the substrate, and establish an anti-fracture membrane, which can bridge cracks that can occur in the substrate prior to or after installation (up to 1/8").



MVP4®			
Item No.	Size	Pail/Case UPC Code	Units/pallet
308505841	5 gallon	747224669001	36 pails

MOISTURE VAPOR BARRIER COATINGS



## Slab-Cote™

### EXTREME MOISTURE VAPOR BARRIER COATING

Bostik Slab-Cote™ Extreme Moisture Vapor Barrier Coating is a single coat, two-component, 100% solids, epoxy formulated to dramatically reduce moisture vapor transmission and surface alkalinity from substrates. Slab-Cote™ passes ASTM F 3010-13, moisture mitigation system for use under resilient flooring. It has 0 VOC's (as calculated per SCAQMD Rule 1168), low odor and is solvent-free. Slab-Cote's™ unique formulation displays a gel-like end of pot life indicator. Material left to cure in the pail will get hot, but will not smoke excessively.

- SINGLE COAT, RAPID CURE, 100% SOLIDS EPOXY FORMULATION
- FOR USE ON PROPERLY PREPARED CONCRETE - EVEN GREEN
- DRAMATICALLY REDUCES MOISTURE VAPOR TRANSMISSION & PH LEVELS FROM SUBSTRATES



Slab-Cote™			
Item No.	Size	Barcode	Units/Pallet
30850619	1 gallon kit	747224603227	64 kits
30612741	2.5 gallon kit	747224606488	27 kits

## D-250™

### MOISTURE VAPOR BARRIER COATING

Bostik D-250™ is a high performance, rapid drying, water-based, penetrating epoxy formulated to dramatically reduce moisture vapor transmission and surface alkalinity from substrates. D-250™ is a low odor, non-flammable, 2-part system. It is pigmented green for visual indication of coverage and film thickness during the installation process. D-250™ is a one or two coat solution depending on conditions.

- TWO-COMPONENT, WATER-BASED EPOXY
- BOSTIK'S BLOCKADE® ANTIMICROBIAL PROTECTION
- REDUCES MOISTURE VAPOR TRANSMISSION



D-250™			
Item No.	Size	Barcode	Units/Pallet
30850617	1 gallon kit	747224640109	64 kits

# Waterproofing and Crack-isolation Membranes

## Ultra-Set® Advanced™

WATERPROOFING, SOUND REDUCING AND CRACK ISOLATION

Ultra-Set® Advanced™ is a tenacious, one-part, trowel applied, elastomeric waterproofing/crack/sound isolation membrane and setting adhesive. Use Ultra-Set® Advanced™ as a waterproofing, crack, and sound isolation membrane over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; and existing, well-bonded vinyl/VCT or ceramic tile.



Ultra-Set® Advanced			
Item No.	Size	Barcode	Case Code
30850803	5 gal	747224608055	--
30850804	2 gal	747224608024	--
30850152	12 x 20 oz/case*	747224602312	10747224602319

\*Sold in full cases only

## GoldPlus™

LATEX WATERPROOFING AND ANTI-FRACTURE MEMBRANE

GoldPlus™ is a ready-to-use, roller-applied, latex, waterproofing and anti-fracture membrane for use beneath thin set ceramic tile installations on vertical and horizontal surfaces. GoldPlus™ exceeds the requirements of ANSI A118.10 (specification for waterproof membranes beneath thin set tile and stone) and ANSI A118.12 specification for crack isolation membranes.

Use GoldPlus™ in commercial or residential applications. Apply over concrete, cement block walls, cement backer board, exterior grade plywood (interior, dry installations only) and mortar beds.

ROLLER-APPLIED FOR EASY APPLICATION

EXCEEDS ANSI A118.10 AND A118.12 FOR WATERPROOFING AND CRACK ISOLATION

1 HOUR DRYING TIME FOR FAST INSTALLATION



GoldPlus™			
Item No.	Size	Barcode	Case Code
30850798	3.5 gal	747224077011	--
30850797	4x1 gal*	747224077004	10747224077001

\*Sold in full cases only

HIGH PERFORMANCE URETHANE FORMULA

BRIDGES CRACKS UP TO 1/8"

INTERIOR & EXTERIOR USE, HORIZONTAL & VERTICAL INSTALLS



WATERPROOFING AND CRACK-ISOLATION MEMBRANES

## Black-Top™

WATERPROOFING AND ANTI-FRACTURE MEMBRANE

Bostik Black-Top™ is a liquid rubber-based, fabric reinforced, cold roller applied, flexible waterproofing and anti-fracture membrane. Use Black-Top™ as a waterproofing and/or anti-fracture membrane over properly prepared concrete; structurally-sound, exterior grade plywood (interior use only); cementitious backer board; and existing, well-bonded ceramic tile or cement terrazzo prior to the installation of ceramic or stone tile.

ROLLER APPLIED

EXCEEDS ANSI A118.10 AND A118.12

EXCEEDS ASTM C-836-89



Black-Top™			
Item No.	Size	Barcode	Case Code
30853440	3' x 87' roll	747224604613	10747224304619
30853441	5 gal (208 ft/unit)**	747224604651	10747224304657
30853442	4 x 6" x 87' roll*	747224604620	10747224304626

\*Sold in full cases only

\*\*Liquid and fabric sold separately



# Hardwood Installation Products

## Ultra-Set® SingleStep2™

**ADVANCED TRI-LINKING™ ADHESIVE, MOISTURE CONTROL & SOUND REDUCTION MEMBRANE**

Ultra-Set® SingleStep2™ is a high performance adhesive, moisture control, and sound reduction membrane all in one. Bostik's breakthrough AXIOS® Tri-Linking™ Polymer Technology used in this formulation maintains the superior long term durability, moisture control and sound abatement properties of high end urethane adhesives. However, it is easier to spread and clean off of prefinished flooring before and after cure. This adhesive contains 1% recycled rubber material, has zero VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water.



[www.youtube.com/BostikUSA](http://www.youtube.com/BostikUSA)



ULTRA-SET® SINGLESTEP2™				
Item No.	Size	Pail/Case UPC Code	Cartridge UPC Code	Units/pallet
30850854	4 gallon	747224700001	--	36 pails





## Bostik's System Solution

- |                         |                                       |
|-------------------------|---------------------------------------|
| 1 Concrete Slab         | 4 Primer                              |
| 2 Crack/Joint Treatment | 5 Self-Leveling Underlayment or Patch |
| 3 Moisture Mitigation   | 6 Hardwood Flooring Adhesive          |
|                         | 7 Hardwood Flooring                   |

## GreenForce®

### ADVANCED TRI-LINKING™ ADHESIVE & MOISTURE CONTROL MEMBRANE

GreenForce® is a high performance adhesive and moisture control membrane all in one. Bostik's breakthrough AXIOS® Tri-Linking™ Polymer Technology used in this formulation maintains the superior long term durability and moisture protection properties of high end urethane adhesives. However, it is easier to spread and clean off of prefinished flooring before and after cure. This adhesive has zero VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water.



[www.youtube.com/BostikUSA](http://www.youtube.com/BostikUSA)



GREENFORCE™				
Item No.	Size	Pail/Case UPC Code	Cartridge UPC Code	Units/pallet
30850844	4 gallon	747224700018	--	36 pails
30850846	12 x 28 oz cartridge	10747224700107	747224700100	60 cases

# Bostik unveils an innovative new technology

AXIOS™ Tri-Linking™ Polymer Technology is easy to spread, simple to clean and offers you the most protection for your hardwood flooring installations. Exactly what you would expect from the hardwood adhesive technology leader.

## DESCRIPTION

Easy to clean and tough, Bostik's AXIOS™ Tri-Linking™ Polymer Technology is a breakthrough in adhesion science.

AXIOS™ technology combines the tenacious bond strength of Bostik's high performance urethane chemistry with the remarkable ease of use experienced from today's most advanced European, hybrid polymer systems.

With moisture vapor protection equivalent to premium moisture mitigation coatings, it's the go-to polymer chemistry for the ultimate in installation protection and simplicity. When combined with Bostik's patent-pending Thickness Control™ Spacer Technology, its performance is equivalent to the sound dampening properties of cork.

AXIOS™ is formulated for use in a variety of residential and commercial hardwood flooring installations, making them easier to install and more durable.

## THE SCIENCE BEHIND THE TECHNOLOGY

Most hardwood adhesives today contain linear polymer chains that link to other molecules only at each end. AXIOS™ Tri-Linking™ Polymer Technology uses a revolutionary molecule that has three branches similar to a tripod. This allows each molecule to bond in three locations instead of only two, making the adhesive bond stronger.

Tri-Linking™ polymers are also more "entangled" because of their unique shape (think of how tangled a bowl full of miniature tripods would be). This entanglement creates a tightly interwoven layer that significantly inhibits water molecules from passing through, dramatically improving moisture vapor protection, sound reduction, and strength.

# Reduce Risk, Improve Installations

## Focus on Bostik's Thickness Control™ Spacer Technology

At Bostik, innovation comes in many forms, not just chemistry. Bostik's patent-pending Thickness Control™ Spacer Technology is a proprietary feature that helps ensure proper membrane thickness is maintained between the hardwood flooring and substrate. Installers can use mallets to engage the tongue and groove or even walk on their work during the installation process without significant reduction in the film thickness that could compromise moisture protection or sound control.



The key is in the rubber crumbs mixed in with the adhesive. The particles are made of recycled, ground up car tires. The size of the particles creates the optimal membrane thickness for superior performance as a moisture reduction and sound control membrane. If you stand on a board installed over any adhesive using Thickness Control™ Spacers, the rubber particles prevent the fluid adhesive from squeezing out underneath the boards and the desired membrane thickness is maintained.

Bostik's Thickness Control™ Spacer Technology not only reduces your risk of failing to achieve proper membrane thickness that could result in flooring failures from moisture, it also makes installation easier. You won't need a special trowel or a clip-on component that wears out quickly. You can use common trowels and be confident that you've got the moisture control and sound reduction performance you expect.



Thickness Control™ Spacers



# HARDWOOD

## Reference Guide

Ultra-Set®  
SingleStep2™

Vapor-Lock™

GreenForce®

Bostik's BEST®

BST™

Pro-MSP™

EFA+™

Pro-Cure™

Wood-Tack™

Product Trait	Ultra-Set® SingleStep2™	Vapor-Lock™	GreenForce®	Bostik's BEST®	BST™	Pro-MSP™	EFA+™	Pro-Cure™	Wood-Tack™
Axios® Tri-Linking™ Technology	✓	--	✓	--	--	--	--	--	--
Moisture limits (Max MVER)	Unlimited	Unlimited*	Unlimited	Unlimited***	15 lb	15 lb	15 lb	3 lb	3 lb
Moisture warranty	Lifetime	Lifetime	Lifetime	Lifetime	5 years	5 years	5 years	--	--
Warranty without moisture vapor testing	✓	--	✓	--	--	--	--	--	--
Sound abatement (IIC/STC)	70/67	69/66	50/--	--	--	--	--	--	--
Thickness Control™ Spacer Technology	✓	✓	--	--	--	--	--	--	--
Easy clean after cure	✓	--	✓	--	--	✓	--	--	--
Workability	Excellent	Moderate	Excellent	Moderate	Moderate+	Easy	Easy	Moderate	Excellent
Green grab	Strong	Strong	Good	Good	Strong	Moderate	Moderate	Moderate	Good
Unit size	4 gallon	4 gallon	4 gallon, 12 x 28 oz	5 gallon, 12 x 28 oz, 24 x 10.1 oz, 12 x 10.1 oz	4 gallon	4 gallon 12 x 20 oz	5 gallon 4 gallon	4 gallon	4 gallon
<b>Warranty</b>									
Duration of Bond Warranty	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	10 year	10 year
Moisture Warranty Duration	Lifetime	Lifetime	Lifetime	Lifetime	5 Years	5 Years	5 Years	--	--
Flooring Types Under Moisture Protection Warranty	Solid, Bamboo, Engineered	Solid, Engineered	Solid, Bamboo, Engineered	Engineered	Engineered	Engineered	Engineered	--	--
<b>Cured Physical Properties</b>									
Concrete Moisture Vapor Limits	None, Dry to the Touch	None, Dry to the Touch*	None, Dry to the Touch	None, Dry to the Touch***	≤ 15 lbs or 87% RH	≤ 15 lbs or 87% RH	≤ 15 lbs or 87% RH	≤ 3 lbs or 75% RH	≤ 3 lbs or 75% RH
Contains Bostik's BLOCKADE®	Yes	Yes	Yes	Yes	No	No	No	No	No
<b>Sound Reduction Performance</b>									
ASTM E2179 Increased Impact Insulation	21 dB	21 dB	--	--	--	--	--	--	--
ASTM E492-04 IIC- 6" Slab With 5/8" Gypsum Ceiling	70	69	--	--	--	--	--	--	--
ASTM E90-09 STC- 6" Slab With 5/8" Gypsum Ceiling	67	66	--	--	--	--	--	--	--
<b>Application Properties</b>									
Color	Beige w/ Black Specs	Brown w/ Black Specs	Beige	Tan	Brown	Brown	White	Beige	Beige/Tan
Density (lbs/gallon)	14.25	14.7	14.25	12.66	12.66	14.25	13.7	14.08	10.26
<b>Chemical Properties</b>									
Chemistry Type	AXIOS® Tri-Linking™	Urethane	AXIOS® Tri-Linking™	Urethane	Urethane	MS Polymer	Urethane	Urethane	Acrylic
VOC Compliant (calculated per SCAQMD Rule 1168)	Yes (0 g/L)	Yes (0 g/L)	Yes (0 g/L)	Yes (20 g/L)**	Yes (22 g/L)**	Yes (8 g/L)**	Yes (25 g/L)**	Yes (25 g/L)**	Yes (10 g/L)
<b>LEED® Point Contributions</b>									
EQ 4.1: Low-Emitting Materials—Adhesives & Sealants	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
MR 4.2: Recycled Content	Yes, 1% by Weight	Yes, 1% by Weight	No	No	No	No	No	No	No

\*Vapor-Lock™ moisture limit for bamboo: ≤15 lb or 85% RH \*\*Tested per EPA Method 24.

\*\*\*Unlimited moisture limits for Bostik's BEST® applies only to engineered hardwood flooring installations.

# Experiencing moisture issues?

## We're here to help.

### The hardwood industry's most trusted line of moisture vapor control products.

Bostik, the leader in hardwood adhesives, offers the most comprehensive range of products featuring unlimited moisture vapor protection with **no concrete moisture testing requirements**. Also, with these Bostik adhesives there are never any board width or length restrictions, making it easier for you to install your hardwood flooring. The formulas you trust and the performance you can rely on.

#### Adhesive Comparison



<b>Moisture Warranty And Duration</b>	Lifetime, Unlimited	Lifetime, Unlimited	Lifetime, Unlimited	Lifetime, Unlimited	Lifetime, Unlimited*
<b>Flooring Types Covered</b>	Solid, Engineered, Bamboo	Solid, Engineered, Bamboo	Solid, Engineered (Bamboo 15 lb/87% RH limit)	Engineered	Solid, Engineered, Bamboo
<b>Sound Guard™ Sound Reduction</b>	70 IIC, 67 STC	50 IIC	69 IIC, 66 STC	--	62 IIC, 52 STC

\*When used with any Axios®, Urethane, or MS-Polymer Bostik Adhesive.

# Vapor-Lock™

## HARDWOOD ADHESIVE, MOISTURE CONTROL & SOUND REDUCTION MEMBRANE

Bostik's Vapor-Lock™ is a high performance adhesive, moisture control, and sound reduction membrane all in one. Its superior properties provide a tough, flexible, tenacious bond to a variety of surfaces, and it is not adversely affected by exposure to moisture, water or alkalinity. When applied as directed as a moisture vapor membrane, it will prevent damages caused by high subfloor moisture vapor. As a result, costly and time consuming concrete moisture testing is not required for solid or engineered hardwood flooring. For bamboo flooring, Vapor-Lock™ may be used for concrete slabs with elevated moisture levels up to 15 lbs or 87% RH.

Vapor-Lock™ exhibits exceptional green grab or high tack immediately after troweling, making installation easier and more secure. This adhesive contains 1% recycled rubber material, has zero VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water. Vapor-Lock™ contains Bostik's BLOCKADE™ antimicrobial protection, which inhibits the growth of bacteria, mold, or mildew on the surface of the dried adhesive.



HARDWOOD ADHESIVES

VAPOR-LOCK™				
Item No.	Size	Pail/Case UPC Code	Cartridge UPC Code	Units/pallet
30850864	4 gallon	747224699312	--	36 pails

# Bostik's BEST®

## WOOD FLOORING URETHANE ADHESIVE AND MOISTURE VAPOR CONTROL

Bostik's BEST® is a high performance adhesive and moisture control membrane. Its superior properties provide a tough, flexible, tenacious bond to a variety of surfaces. Bostik's BEST® high tacking formula exhibits exceptional green grab immediately after troweling, making installation easier and more secure. When applied as directed as a moisture vapor membrane, it will prevent damages caused by high subfloor moisture vapor. As a result, costly and time consuming concrete moisture testing is not required for engineered hardwood flooring. For solid hardwood or bamboo on substrates >3 lbs. or 75% RH, use MVP4® prior to the use of Bostik's BEST®.

This adhesive has low VOC's (measured per EPA Method 24) and does NOT contain any water. Bostik's BEST® contains Bostik's BLOCKADE™ antimicrobial protection, which inhibits the growth of bacteria, mold, or mildew on the surface of the dried adhesive.



BOSTIK'S BEST®				
Item No.	Size	Pail/Case UPC Code		Units/pallet
30850825	5 gallon	747224389053		36 pails
Item No.	Size	Pail/Case UPC Code	Cartridge UPC Code	Units/pallet
30850116	12 x 28 oz cartridge	10747224700121	747224700124	60 cases
30850117	12 x 10.1 oz cartridge	10747224700084	747224389107	96 cases
30850115	24 x 10.1 oz cartridge	10747224700060	747224389107	105 cases

# Sound Reduction With Adhesive!



Nobody wants to be disturbed by their neighbors. Whether it's the home theater system from your neighbors below, or the high heeled shoes of the neighbor above, acoustics play an essential role in the comfort of a home. Bostik offers several products specifically designed to improve acoustics.



Bostik installation systems with Sound Guard™ eliminate the need for mats or underlayments used beneath hardwood floor, resulting in faster in faster installs times and lower project costs. These adhesives reduce the vibration of boards, resulting in a quieter, more comfortable floor.



Test*	Ceiling Type	Vapor-Lock™	Ultra-Set® SingleStep2™	MVP4™ + Adhesive**
IIC	5/8" Suspended Gypsum	69 dB	70 dB	62 dB
	No Suspended Ceiling	49 dB	50 dB	49 dB
Δ IIC	No Suspended Ceiling	21 dB	21 dB	21 dB
STC	5/8" Suspended Gypsum	66 dB	67 dB	61 dB
	No Suspended Ceiling	50 dB	51 dB	52 dB

\* Tests were performed using 3/8" engineered hardwood bonded to 6" thick concrete  
 \*\* Test performed with 9/16" thick engineered hardwood and Bostik's Best®.

## EFA+™

### ELASTOMERIC FLOORING ADHESIVE & MOISTURE VAPOR RETARDER

Bostik's EFA+™ is an easy-to-trowel urethane adhesive and moisture control membrane. It provides a tough, flexible, tenacious bond to a variety of surfaces. Bostik's EFA+™ elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor. Bostik's EFA+™ exhibits a long open time, making installation easier and faster. This adhesive has low VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water.

EASY SPREAD

GREAT RIDGE RETENTION

LOW VOC



## BST™

### WOOD FLOORING ADHESIVE & MOISTURE VAPOR RETARDER

Bostik's BST™ is a urethane adhesive and moisture control membrane. Its superior properties provide a tough, flexible, tenacious bond to a variety of surfaces. Bostik's BST™ elastomeric characteristics allow the adhesive to move with the wood as it expands and contracts over the life of the floor. Bostik's BST™ exhibits exceptional green grab making installation easier as it minimizes slipping of the flooring. This adhesive has low VOC's (as calculated per SCAQMD Rule 1168) and does NOT contain any water.

GREAT GREEN GRAB MINIMIZES SLIPPING

MODERATE MOISTURE VAPOR PROTECTION

LOW VOC



HARDWOOD ADHESIVES

## Pro-MSP™

### HARDWOOD ADHESIVE WITH MOISTURE VAPOR PROTECTION

Bostik's Pro-MSP™ is a hardwood and bamboo adhesive and moisture control membrane all in one. This adhesive formulation maintains long term durability and moisture control properties, and it is easy to spread and clean off of prefinished flooring before and after cure. This adhesive has low VOC's (as measured per EPA Method 24) and does NOT contain any water.

EASY SPREAD & CLEAN

SUBFLOOR MOISTURE PROTECTION

LOW ODOR & VOC



## Pro-Cure™

### MOISTURE-CURE URETHANE ADHESIVE

Bostik's Pro-Cure™ is a professional grade, moisture-cure urethane adhesive for wood flooring; this adhesive does NOT contain any water. Pro-Cure™ may be used to adhere all engineered, acrylic impregnated, solid plank-flat milled, shorts, bamboo and parquet hardwood flooring designed and recommended in writing by the hardwood flooring manufacturer for glue-down applications. This adhesive can also be used to install plywood as described, as well as, ceramic tile, marble, and stone inlays for light commercial and/or residential applications.

GREAT GREEN GRAB MINIMIZES SLIPPING

MODERATE MOISTURE VAPOR PROTECTION

LOW VOC



## Wood-Tack™

### ENGINEERED WOOD FLOORING ADHESIVE

Bostik's Wood-Tack™ is an adhesive for engineered, solid, and select bamboo hardwood flooring installations. This air-curing, self-crosslinking adhesive is exceptionally easy to trowel, and its rapid tacking properties allow for fast installation of wood flooring materials. Wood-Tack™ is a low VOC, low odor adhesive that does not contain any solvents or heavy metals. This adhesive provides exceptional bond strength between the wood flooring and substrate.

RAPID TACKING

FAST INSTALLATION IN ABOVE-GRADE APPLICATIONS

EXCEPTIONALLY EASY TO TROWEL



EFA+™				
Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
30617512	4 gallon	36 pails	747224700919	--
BST™				
Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
30850806	4 gallon	36 pails	747224700278	--
PRO-MSP™				
Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
30850809	4 gallon	36 pails	747224700209	--
30617345	12 x 20 oz sausages	90 cases	10747224700886	747224700889
PRO-CURE™				
Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
30850842	4 gallon	36 pails	747224680402	--
WOOD-TACK™				
Item No.	Size	Units/pallet	Pail/Case UPC Code	Cartridge UPC Code
30856391	4 gallon	48 pails	747224606723	--

# Climb™

## HARDWOOD WALL PLANK AND TREAD CAP ADHESIVE

Bostik's Climb™ is a one-component, easy gunning, non-sag adhesive that is specifically formulated for hardwood flooring planks or blocks on interior, above-grade walls and installation of stair tread caps. The Climb™ formula has superior green grab (grab strength while wet) and cures quickly to form a tenacious bond. Once cured, Climb™ remains tough yet flexible for extreme durability, helps reduce stair squeaking, and reduces the sound of footsteps on the stairs. This specialty formulation is also easy to clean off of hardwood wall planks, prefinished tread caps and risers even after cure. Climb™ has 0% solvents and low odor.

EXTREMELY STRONG, DURABLE BOND

EASY TO CLEAN, EVEN AFTER CURE

HELPS ELIMINATE SQUEAKING & REDUCES SOUND



# Heavy Duty™

## CONSTRUCTION ADHESIVE

A one-component, moisture cure polyurethane adhesive exhibiting high strength and is suitable for both interior and exterior installations. Heavy Duty™ Construction Adhesive typically does not require priming to achieve a watertight seal on common construction materials such as stone, concrete, masonry, cedar, wood, anodized aluminum, galvanized steel, vinyl, fiber-cement board, etc. Heavy Duty™ Construction Adhesive can bond to wet, frozen or treated lumber.

REDUCES SQUEAKS IN SUB-FLOORS

95% SOLIDS AND FASTER CURE THAN TYPICAL SOLVENT-BASED SYSTEMS

ADHERES TO WET AND FROZEN LUMBER



# PWC

## GENERAL PURPOSE SILICONIZED ACRYLIC CAULK

Bostik's PWC is a siliconized acrylic latex caulk with excellent adhesion to most building materials and common household surfaces. PWC is compatible with latex and oil based paints. Bostik PWC has been developed for caulking applications including: trim, windows, door frames, sinks, tubs, shower surrounds, countertops, ceramic tile and natural stone.

PAINTABLE IN 2-3 HOURS

FLEXIBLE BOND AND LOW SHRINKAGE TO PREVENT CRACKING

COMPLEMENTS MOST PRE-FINISHED WHITE TRIM



# Ultimate™

## ADHESIVE REMOVER

Bostik's Ultimate™ Adhesive Remover is a readily biodegradable, low odor, water rinseable solution. Use Ultimate™ to remove wet and cured urethane adhesive from the surface of pre-finished (non-wax) wood flooring.

READY TO USE

REMOVES CURED AND UNCURED URETHANE ADHESIVES

RESIDUE FREE



# Cartridge Guns

## CARTRIDGE DISPENSING GUNS

Bostik high quality cartridge guns are designed to last and to make your job easier. Our standard 7:1 and 12:1 drives are perfect for lower viscosity products, while our higher deluxe 18:1 and 26:1 drives are perfect for the higher viscosity hardwood adhesives and construction sealants.

STANDARD 7:1 AND 12:1 DRIVES FOR LOWER VISCOSITY PRODUCTS

DELUXE 18:1 AND 26:1 DRIVE FOR VERY VISCOUS PRODUCTS

10, 1 OZ, 20 OZ, AND 28 OZ SIZES



### CARTRIDGE GUNS

Item No.	Size	Drive
30852242	Manual 10 oz	Standard 7:1 Drive
30852243	Manual 10 oz	Deluxe 26:1 Drive
30852244	Manual 28 oz	Deluxe 26:1 Drive

### SAUSAGE GUN

Item No.	Size	Drive
30616051	Manual 20 oz	Standard 12:1 Drive
30618568	Manual 20 oz	Deluxe 18:1 Drive

### CARTRIDGE PRODUCTS

Item No.	Color	Size	Barcode	Case Code
<b>Climb™</b>				
30854239	White	12 x 10.1 oz/case*	747224700292	10747224700299
<b>Heavy Duty™ Construction Adhesive</b>				
30854485	Natural	12 x 10.1 oz/case*	747224699107	10747224699104
30850203	Natural	12 x 28 oz/case*	747224699206	10747224699203

### PWC

30614464	White	10.1 oz/cartridge	747224606778	10747224606775
----------	-------	-------------------	--------------	----------------

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
--------------	-------------	--------------	---------------

<b>Climb™</b>			
10.1 oz cartridge	13.3 lbs/case	96 cases	1,325 lbs

<b>Heavy Duty™ Construction Adhesive</b>			
10.1 oz cartridge	15 lbs/case	96 cases	1,490 lbs
28 oz cartridge	26 lbs/case	60 cases	1,610 lbs

### PWC

10.1 oz cartridges	13.2 lbs/case	120 cases	1,584 lbs
--------------------	---------------	-----------	-----------

\*Sold in full cases only

### ULTIMATE™ ADHESIVE REMOVER

Item No.	Item	Size	Units/pallet	Pail/Case UPC Code
30850832	Liquid	1 quart - 12/case	48 cases	747224656094
30612734	Towels	1 canister - 6/case	120 cases	747224656018





## Bostik's System Solution

- 1 Concrete Slab
- 2 Moisture Vapor Barrier Coating
- 3 Primer Coating
- 4 Self-Leveling Underlayment
- 5 Soft Flooring Adhesive
- 6 Soft Flooring

# Soft Flooring Installation Solutions

**ADHESIVES FOR LVT, LVP, SHEET VINYL, VCT, WPC, SPC, CARPET TILES & RUBBER FLOORING**

## LOCK A699 PSA™

### HIGH-MOISTURE RESISTANT RESILIENT ADHESIVE

LOCK A699 PSA™ is a solvent-free, water-based, acrylic adhesive specifically formulated for the installation of most resilient flooring in residential and commercial applications and has high moisture resistance. LOCK A699 PSA™ is a 0-VOC formulation as calculated by SCAQMD Rule 1168. It displays tenacious early bond strength and is specially formulated to be highly resistant to plasticizer migration. LOCK A699 PSA™ has been formulated to exhibit a unique combination of application properties including excellent trowelability, fast tack/grab, low odor and easy clean up.

LOCK A699 PSA™ is formulated to resist moderate amounts of moisture vapor from concrete substrates, allowing it to bond flooring in conditions up to 99% RH, and pH of up to 11.0. Always measure the in-situ RH of concrete slabs in accordance with ASTM F 2170 and test the pH of the slab.



**BONDS A WIDE VARIETY OF FLOORING**

**HIGH STRENGTH, HIGH TACK**

**BONDS UP TO 99% RH & 11.0 PH**



LOCK A699 PSA™				
Item No.	Color	Size	Barcode	Case Code
30620236	White	4 gal	747224701138	--
30620265	White	1 gal	747224701121	10747224701319
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	35.1 lbs	48 pails	1,725 lbs	
4x1 gal case	36.24 lbs/case*	36 cases	1,345 lbs	

\*Sold in full cases only

# Soft Flooring

## Adhesives

### COMPARISON CHART

		LOCK A490 LVT™	LOCK A799 TRANSITIONAL™	LOCK A499 PSA™	LOCK A699 PSA™	LOCK A195 VCT™	LOCK A495 AERO™	LOCK A100 COVE™	LOCK P799 I/O RUBBER™	LOCK A285 MP™	LOCK A485 MP™
<b>Product Type</b>	--	Firm-Set Acrylic	Firm-Set Acrylic	Pressure Sensitive Acrylic	Pressure Sensitive Acrylic	Pressure Sensitive Acrylic	Pressure Sensitive Acrylic	Firm Set Acrylic	1-Part Moisture-Cure Polyurethane	Firm-Set Acrylic	Firm-Set Acrylic
<b>Applications</b>	--	Firm-set vinyl flooring adhesive	Universal firm-set transitional adhesive	Universal pressure-sensitive adhesive	High-moisture resistant resilient adhesive	Moisture-resistant vinyl composition tile adhesive	Solvent free aerosol resilient adhesive	Cove base and wall adhesive	Premium rubber flooring adhesive	Contractor grade multi-purpose adhesive	Multi-purpose adhesive
<b>Flooring Types</b>	Luxury Vinyl Tile/Plank	Yes	Yes	Yes	Yes	No	Yes	No	No	No	No
	Sheet Vinyl	Yes	Yes	Yes	Yes	No	Yes	No	No	Yes	Yes
	VCT	No	No	Yes	Yes	Yes	Yes	No	No	No	No
	WPC/SPC/Rigid Core	No	No	Yes	Yes	No	No	No	No	No	No
	Modular Carpet Tiles	No	No	Yes	Yes	No	No	No	No	No	No
	Rubber	No	No	No	No	No	No	No	Yes	No	No
	Vinyl Cove Base	No	No	No	No	No	No	Yes	No	No	No
	Rubber Cove Base	No	No	No	No	No	No	Yes	No	No	No
Carpet & Pad*	No	No	No	No	No	No	No	No	Yes	Yes	
<b>Use Environments</b>	Exterior	No	No	No	No	No	No	No	Yes	No	No
	Residential	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Commercial	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Wet Areas	No	No	No	No	No	No	No	Yes	No	No
<b>Substrates</b>	Concrete	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	APA Grade Plywood	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Well-Bonded Vinyl	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Terrazzo	No	No	No	No	Yes	No	No	Yes	No	No
	Asphalt	No	No	No	No	No	No	No	Yes	No	No
<b>Physical Properties</b>	Req'd Flash Time (minutes)	Porous: 10-20 Non-porous: 30-60	Porous: 10-20 Non-porous: 30-60	10-20	Porous: 10-20 Non-porous: 30-60	0-15	Porous: 10-20 Non-porous: 30-60	0	0	0-20	0-15
	Wet Lay	Yes	Yes	No	No	No	No	Yes	Yes	Yes	Yes
	Working Time	4 hours	4 hours	4 hours	4 hours	16 hours	2 hours	Up to 30 min	30-40 min	20-30 min	15-20 min
	Return to Heavy Traffic	72 hours	72 hours	72 hours	Immediate	72 hours	Immediate	12 hours	24 hours	72 hours	72 hours
	Moisture Resistance	Up to 99% RH	Up to 99% RH*	99% RH	Up to 99% RH***	95% RH	Up to 95% RH	N/A	99% RH	Up to 85% RH	Up to 85% RH
	Contains Antimicrobial System	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	pH Resistance	Up to 10.0 pH	Up to 12.0 pH	Up to 10.0 pH	Up to 12.0 pH****	8.0-10.0 pH	Up to 11.0 pH	N/A	Unaffected	8.0-9.0 pH	8.0-9.0 pH
	Freeze/Thaw	Do Not Freeze	Do Not Freeze	Do Not Freeze	Do Not Freeze	Do Not Freeze	Do Not Freeze	Do Not Freeze	Stable	Do Not Freeze	Do Not Freeze
<b>Packaging</b>	--	4 gal bio pail, 4 x 1 gal pail case	4 gal bio pail, 4 x 1 gal pail case	4 gal bio pail, 4 x 1 gal pail case	4 gal bio pail, 4 x 1 gal pail case	4 gal bio pail	6 x 22 oz can case	4 gal bio pail, 12 x 30 oz cartridge case	4 gal metal pail	4 gal bio pail,	4 gal bio pail,

Note: Please refer to technical data sheets for proper use instructions.

\* Carpet types include: ActionBack™, Jute back, Enhancer back, Urethane back, Latex Unitary back, Woven back, Axminster and Needle-punched.

\*\*95% for PVC carpet tile, 90% for sheet vinyl

\*\*\*90% for sheet vinyl

\*\*\*\* 10.0 pH for sheet vinyl

# LOCK A490 LVT™

## FIRM-SET VINYL FLOORING ADHESIVE

LOCK A490 LVT™ is a solvent-free, water-based, acrylic adhesive specifically formulated for the installation of vinyl flooring in high rolling load applications. LOCK A490 LVT™ is a 0-VOC formulation as calculated by SCAQMD Rule 1168. It displays tenacious early bond strength, and is specially formulated to be highly resistant to plasticizer migration. LOCK A490 LVT™ has been formulated to exhibit a unique combination of application properties including excellent trowelability, fast tack/grab, low odor and easy clean up. LOCK A490 LVT™ may be used to adhere LVT (Luxury Vinyl Tile), LVP (Luxury Vinyl Plank), and sheet vinyl. It may be used over all properly prepared substrates common to resilient flooring installations including; concrete, APA grade plywood, cementitious-based patch/underlayments, gypsum-based patch/underlayments (in dry, above-grade applications), terrazzo, and radiant heated flooring.

RAPID TACKING, FIRM SET

HIGH BOND & SHEAR STRENGTH

PLASTICIZER MIGRATION RESISTANT



# LOCK A499 PSA™

## UNIVERSAL PRESSURE SENSITIVE ADHESIVE

LOCK A499 PSA™ is a multi-purpose, high tack, water-based adhesive specifically formulated for the installation of most resilient flooring in residential and commercial applications. LOCK A499 PSA™ is a low VOC formulation. LOCK A499 PSA™ flashes off quickly, but has a long working time. It displays tenacious bond strength. LOCK A499 PSA™ has been formulated with exceptional application properties including excellent trowelability, fast tack/grab, low odor, and easy clean up.

PERMANENT, AGGRESSIVE TACK

BONDS A WIDE VARIETY OF FLOORING

BONDS UP TO 99% RH & 12.0 PH



RESILIENT ADHESIVES

# LOCK A799 TRANSITIONAL™

## UNIVERSAL FIRM SET TRANSITIONAL ADHESIVE

LOCK A799 TRANSITIONAL™ is a multi-purpose, high tack, water-based acrylic adhesive that installs like a pressure sensitive adhesive but transitions to a firm set after 72 hours. It is specifically formulated for the installation of most resilient flooring in residential and commercial applications and is a 0 VOC formulation as calculated per SCAQMD Rule 1168. When used with carpet tiles, this adhesive is formulated for releasing and re-bonding while permanently retaining its tack, allowing individual tiles to be lifted out and replaced without substantial loss of adhesive properties. LOCK A799 TRANSITIONAL™ has been formulated with exceptional application properties including excellent trowelability, fast tack/grab, low odor, and easy clean up.

AGGRESSIVE TACK

BONDS A WIDE VARIETY OF FLOORING

BONDS UP TO 99% RH & 12.0 PH (FOR SHEET VINYL, 90% RH & 10.0 PH, PVC CARPET TILE, 95% RH & 10.0 PH)



# LOCK A195 VCT™

## MOISTURE RESISTANT VINYL COMPOSITION TILE ADHESIVE

LOCK A195 VCT™ is a solvent-free adhesive that dries translucent. Tiles may be laid into the adhesive for an extended period of time after drying. Aggressive tack permits installers to work off tiles. This low-odor adhesive can be used in occupied environments such as hospitals, schools, nursing homes, hospitality, and food preparation centers. LOCK A195 VCT™ is highly water resistant when dry. LOCK A195 VCT™ contains an advanced antimicrobial system to protect the adhesive from bacteria and fungal growth. LOCK A195 VCT™ has an extended working time provided it remains free of dust and dirt.

APPROVED FOR USE OVER 'CUTBACK' STAINS

SOLVENT-FREE

EXTENDED WORKING TIME



### LOCK A490 LVT™

Item No.	Color	Size	Barcode	Case Code
30620295	White	4 gal	747224701145	--
30620299	White	1 gal	747224701169	10747224701357
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	35.5 lbs	48 pails	1,744 lbs	
4x1 gal case*	36.64 lbs/case	36 cases	1,360 lbs	

### LOCK A799 TRANSITIONAL™

Item No.	Color	Size	Barcode	Case Code
30856635	White	4 gal	747224700902	--
30856636	White	1 gal	747224700896	10747224701388
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	34 lbs	48 pails	1,517 lbs	
4x1 gal case*	35.4 lbs	36 cases	1,138 lbs	

\*Sold in full cases only

### LOCK A499 PSA™

Item No.	Color	Size	Barcode	Case Code
30620271	Beige	4 gal	747224701114	--
30620270	Beige	1 gal	747224701107	10747224701340
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	35.5 lbs	48 pails	1,744 lbs	
4x1 gal case*	36.64 lbs/case	36 cases	1,360 lbs	

### LOCK A195 VCT™

Item No.	Color	Size	Barcode	Case Code
30620296	Tan	4 gal	47224701244	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	35.5 lbs	48 pails	1,817 lbs	

\*Sold in full cases only

# LOCK P799 I/O RUBBER™

## PREMIUM RUBBER FLOORING ADHESIVE

LOCK P799 I/O RUBBER™ is a solvent-free, single-component, moisture-cured, urethane adhesive specifically formulated for the installation of most rubber flooring. LOCK P799 I/O RUBBER™ is a 0-VOC formulation (as calculated per SCAQMD Rule 1168). Once cured, this adhesive is not adversely affected by exposure to moisture and its superior properties provide a tenacious bond to a variety of surfaces either indoors or outdoors. LOCK P799 I/O RUBBER™ has been formulated to exhibit a unique combination of application properties including excellent trowelability, fast tack/grab, low odor and easy clean up.

SUPERIOR BOND STRENGTH

INTERIOR & EXTERIOR

LOW ODOR & SOLVENT FREE



# LOCK A100 COVE™

## COVE BASE AND WALL ADHESIVE

Bostik LOCK A100 COVE™ is a solvent-free, water-based, acrylic adhesive specifically formulated for the installation of vinyl (PVC) and rubber cove base, as well as vinyl wall coverings. LOCK A100 COVE™ contains low VOCs. It displays tenacious wet strength and is specially formulated to be highly resistant to plasticizer migration. LOCK A100 COVE™ has been formulated to exhibit a unique combination of application properties including excellent trowelability, fast tack/grab, low odor, and easy cleanup.

HIGH STRENGTH FORMULATION

EASY SPREAD & WORKABILITY

PLASTICIZER MIGRATION RESISTANT



# LOCK A495 AERO™

## SOLVENT-FREE AEROSOL RESILIENT ADHESIVE

LOCK A495 AERO™ is a solvent-free, water-based, acrylic spray adhesive with high moisture resistance, specifically formulated for the installation of sheet vinyl, LVT, and VCT. LOCK A495 AERO™ is a 0-VOC formulation (as calculated by SCAQMD Rule 1168). It displays tenacious early bond strength, and is specially formulated to be highly resistant to plasticizer migration. LOCK A495 AERO™ has been formulated for fast tack/grab, low odor and easy clean up. Extended working time provided it remains free of dust and dirt.

RAPID TACKING

FAST INSTALLATION IN ABOVE-GRADE APPLICATIONS

EXCEPTIONALLY EASY TO TROWEL



# LOCK A485 MP™

## MULTI-PURPOSE CARPET ADHESIVE

LOCK 485 MP™ premium multi-purpose adhesive is designed for direct glue-down interior carpet installations, for bonding carpet to pad in double stick systems and can also be used with mineral or fibrous-backed resilient sheet goods. LOCK 485 MP™ quickly develops adhesive legging and forms a strong durable bond with most commercial broadloom carpets. The adhesive remains tacky for an extended period of time, has little odor and is environmentally friendly. LOCK 485 MP™ contains an antimicrobial system for enhanced resistance to mold and mildew.

COMMERCIAL AND RESIDENTIAL USE

SOLVENT-FREE

FAST TACKING / QUICK LEGGING



# LOCK A285 MP™

## CONTRACTOR GRADE MULTI-PURPOSE ADHESIVE

LOCK A285 MP™ is an economical contractor-grade multipurpose adhesive ideal for light traffic installations in offices, residential, and light commercial areas. LOCK A285 MP™ is a solvent-free, waterbased adhesive suggested for use in occupied buildings, as it is low in odor, contains no solvents and is environmentally safe with no hazardous ingredients. LOCK A285 MP™ contains an Antimicrobial System for enhanced resistance to mold and mildew.

ECONOMICAL FORMULA

SOLVENT-FREE

STRONG BOND STRENGTH



### LOCK P799 I/O RUBBER™

Item No.	Color	Size	Barcode	Case Code
30620231	Dark Gray	4 gal	747224701282	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	55 lbs	36 pails	2,055 lbs	

### LOCK A100 COVE™

Item No.	Color	Size	Barcode	Case Code
30620287	White	4 gal	747224701275	--
30620288	White	30 oz cartridge	747224701268	10747224701333
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	43.5 lbs	48 pails	2,128 lbs	
30 oz cartridge, 12/case *	32.02 lbs	60 cases	1,962 lbs	

### LOCK A485 MP™

Item No.	Color	Size	Barcode	Case Code
30856647	Tan	4 gal	747224701305	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	39.5 lbs	48 pails	1,766 lbs	

### LOCK A285 MP™

Item No.	Color	Size	Barcode	Case Code
30619654	Tan	4 gal	747224701091	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	39.9 lbs	48 pails	1,786 lbs	

### LOCK A495 AERO™

Item No.	Color	Size	Barcode	Case Code
30620272	White	22 oz can	747224701251	10747224701326
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
22 oz can, 6/case	10.486 lbs	96 cases	862 lbs	

\*Sold in full cases only



## COTE A985 ENCAPSULATOR™

### ADHESIVE RESIDUE ENCAPSULATOR

COTE A985 ENCAPSULATOR™ is a light-colored, high-strength acrylic polymer compound formulated to isolate old cutback stains and other adhesive residues that would discolor or affect the bond of the new flooring installation. Black asphalt-based cutback adhesive is highly reactive with vinyl back flooring and must be completely removed until there are no remaining trowel ridges or continuous film. COTE A985 ENCAPSULATOR™ can be used to isolate the remaining permanent stain after the cutback has been removed. Prior to the installation of floor covering systems, COTE A985 ENCAPSULATOR™ provides a clean surface for better adhesive bonds. It is solvent-free, low VOC, and contains an antimicrobial system for enhanced resistance to mold and mildew. COTE A985 ENCAPSULATOR™ is designed and warranted for use only in conjunction with adhesives manufactured by Bostik, Inc.

APPROVED FOR USE OVER 'CUTBACK' STAINS

IMPROVES ADHESIVE BOND

PROTECTS AGAINST PLASTICIZER MIGRATION



#### COTE A985 ENCAPSULATOR™

Item No.	Color	Size	Barcode	Case Code
30620297	Yellow	4 gal	747224701237	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	44.7 lbs	48 pails	2,201 lbs	

## COTE A985 GYP™

### PRIMER FOR ALKALINE OR POROUS SUBSTRATES

COTE A985 GYP™ is an acrylic floor preparation solution designed to improve flooring substrates before the application of floor covering adhesives. COTE A985 GYP™ will improve dry, porous substrates for a better bonding surface, help protect the adhesive from alkalinity damage and improve adhesive spread rate. COTE A985 GYP™ is suitable for use over APA approved flooring grade plywood, concrete or acoustical concrete and floor patch and can prevent over absorption of adhesives resulting in a better bond. COTE A985 GYP™ may also be used as a primer for gypsum-based substrates prepared in accordance with ASTM F2419. COTE A985 GYP™ is designed and warranted for use only in conjunction with adhesives manufactured by Bostik, Inc.

PROMOTES A BETTER BONDING SURFACE

BLOCKS SURFACE PH

ROLL ON APPLICATION



#### COTE A985 GYP™

Item No.	Color	Size	Barcode	Case Code
30620298	Green	4 gal	747224701220	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	35.5 lbs	48 pails	1,759 lbs	

SUBSTRATE PREPARATION

# Tile and Stone Installation Guide

Selection Guide Key				
Tile Types		Substrates		
A. Non-Vitreous B. Semi-Vitreous C. Vitreous D. Impervious/Porcelain E. White Translucent Marble F. Granite, Stable Stones and Slate	G. Moisture Sensitive Stone (i.e. Russo LeVanto and Nero Marquina Marble or Green Marble and their Agglomerates) H. Large Ceramic Tile, Stable Stone & Granite I. Resin Backed Stone J. Glass Tiles K. Gauged Porcelain Tiles/Panels	1. Exterior Grade Plywood 2. Concrete 3. Gypsum Wallboard 4. Cementitious Backer Units 5. Properly Prepared Ceramic Tile	6. Properly Prepared Vinyl/VCT tile 7. Cutback Residue (interior, dry only) 8. Clean Steel 9. Approved Waterproofing Membranes	
Product Name	Description	Tile Types	Substrates	Specification
Grouts				
<b>Dimension® RapidCure™</b>	Glass-filled, pre-mixed, urethane grout	A, B, C, D, E, F, G, H, I, J, K	N/A	NA
<b>TruColor® RapidCure™</b>	Premium, pre-mixed urethane grout	A, B, C, D, E, F, G, H, I, J, K	N/A	NA
<b>Hydroment® Vivid</b>	Rapid curing high performance grout	A, B, C, D, E, F, G, H, I, J, K	N/A	A118.7
<b>Hydroment® Ceramic Tile Grout™ (Sanded)</b>	For use in grout joints from 1/8" to 1-1/2"	A, B, C, D, E, F, G, H, I, J, K	N/A	A118.6 & A118.7*
<b>Hydroment® Dry Tile Grout™ (Unsanded)</b>	For use in grout joints up to 1/8"	A, B, C, D, E, F, G, H, I, J, K	N/A	A118.6 & A118.7*
<b>EzPoxy™ EzClean™</b>	100% solids epoxy mortar & grout	A, B, C, D, E, F, G, H, I, K	1, 2, 4, 5, 6, 8, 9	A118.3
Specialty Adhesive				
<b>Bosti-Set™</b>	Thin porcelain tile panel adhesive & sound reduction membrane	K	1, 2, 3, 4, 5, 8, 9	NA
Mortars & Thinsets				
<b>BAM™</b>	Fiber-reinforced, RapidCure™, large & heavy tile mortar	A, B, C, D, E, F, H, I, J, K	1, 2, 3, 4, 5, 6, 7, 9	118.4, 118.11 & 118.15
<b>Glass-Mate™</b>	Glass tile mortar	A, B, C, D, E, F, H, J	1, 2, 3, 4, 5, 7, 9	A118.4 & A118.11* A137.2-7**
<b>Reflex®</b>	Ultra-premium polymer-modified mortar	A, B, C, D, E, F, H, I, J, K	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
<b>StoneWall™</b>	High performance and non-sag mortar	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
<b>Big Tile &amp; Stone™</b>	Polymer-modified large and heavy tile mortar	A, B, C, D, E, F, H, K	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
<b>Single-Flex® FS</b>	Fast-setting premium multi-purpose polymer-modified thin set mortar	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
<b>Single-Flex®</b>	Premium multi-purpose polymer-modified thin set mortar	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
<b>Large Format Floor™</b>	Polymer-modified mortar for large format ceramic floor tiles	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
<b>Bostik PM™</b>	Multi-purpose polymer-modified thin set mortar	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4 & A118.11
<b>Ditra-Set™</b>	Portland cement thin set and large and heavy tile mortar for Schluter®-Ditra uncoupling membrane	A, B, C, D, E, F, H	2, 3, 4, (1, 5, 6)**	A118.1, (A118.4 & A118.11)*
<b>Tile-Mate® Premium</b>	Premium, unmodified thin set mortar	A, B, C, D, E, F, H	2, 4, (1, 3, 5, 6, 7, 9)*	A118.1, (A118.4 & A118.11)*
<b>Porcelain-Mate™</b>	Polymer-modified portland cement thin set mortar	A, B, C, D, E, F, H	2, 4, (1, 3, 5, 6, 7, 9)**	A118.4
Admixtures				
<b>1900™</b>	Epoxy modified grout & mortar admixture	A, B, C, D, E, F, G, H, I	1, 2, 3, 4, 5, 6, 7, 9	A118.8
<b>425™</b>	Multi-purpose acrylic latex admixture	A, B, C, D, E, F, H	1, 2, 3, 4, 5, 6, 7, 9	A118.4, A118.6, A118.7 & A118.11
Mastics				
<b>D-2001® Ultra-Premium™</b>	Superior performance ceramic tile mastic	A, B, C, D, F, H	1, 2, 3, 4, 5	A136.1 Type I & Type II
<b>Multi-Purpose™</b>	Floor & wall mastic	A, B, C, D, F	1, 2, 3, 4, 5	A136.1 Type I & Type II
<b>Professional Grade™</b>	Ceramic tile mastic	A, B, C, D, F	1, 2, 3, 4, 5	A136.1 Type I
Waterproofing Membranes				
<b>Ultra-Set® Advanced™</b>	Waterproofing, sound reducing and anti-fracture membrane	A, B, C, D, E, F, G, H	1, 2, 3, 4, 5, 6, 7, 8, 9	A118.10 & A118.12
<b>GoldPlus™</b>	Latex waterproofing and anti-fracture membrane	N/A	1, 2, 3, 4, 5, 9	A118.10 & A118.12
<b>Black-Top™</b>	Waterproofing and anti-fracture membrane	N/A	1, 2, 3, 4, 5, 6, 7, 9	A118.10 & A118.12

\*When mixed with 425™ Multi-Purpose Acrylic Latex Admixture



## Bostik's System Solution

- |  |   |
|--|---|
| <b>1</b> Concrete Slab                       | <b>4</b> Waterproofing and Anti-Fracture Membrane |
| <b>2</b> Primer                              | <b>5</b> Mortar                                   |
| <b>3</b> Self-Leveling Underlayment or Patch | <b>6</b> Tile                                     |
|  | <b>7</b> Grout                                    |

# Tile and Stone Installation Products

GROUTS, MORTARS, SEALANTS, WATERPROOFING AND ACCESSORIES

## BAM™

FIBER-REINFORCED, RAPIDCURE™, LARGE & HEAVY TILE MORTAR

Bostik BAM™ is a high performance, fiber-reinforced, extended open time, large and heavy tile mortar with RapidCure™ Technology. BAM™ is specifically formulated for maximum performance in commercial and residential applications of large and heavy tile, glass tile, mosaics, quarry, porcelain, ceramic, most natural stone tiles, and gauged porcelain tile / panels. The RapidCure™ Technology in BAM™ allows for a consistent cure that results in most applications to be ready for grout in 4 hours, while delivering an open time and adjustability time of up to 30 minutes at exceptional bond strength that exceeds ANSI 118.15 requirements. BAM's™ RapidCure™ Technology allows for use over uncoupling membranes and various sheet membranes. BAM™ is suitable for use over properly prepared concrete, cement backer boards, masonry, concrete block, mortar beds, cement terrazzo, structurally sound exterior grade plywood (interior / dry use only), existing, well-bonded vinyl composite tile (VCT), existing tiles, cutback adhesive residue (dry only), Bostik Ultra-Set® Advanced™, Black-Top™, and GoldPlus™.



LARGE AND HEAVY TILE MORTAR:  
ANSI 118.4, 118.11, 118.15

FIBER-REINFORCED

EXTENDED POT LIFE, GROUT  
IN 4 HOURS

BAM™				
Item No.	Color	Size	Barcode	Case Code
30611812	Gray	50 lb	747224606464	--
30612847	White	50 lb	747224606686	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
50 lb	50 lb	48	2,460 lbs	
50 lb	50 lb	48	2,460 lbs	



AT YOUR SERVICE 24/7

NEW!

# BOSTIK PRO™ MOBILE APP

DOWNLOAD TODAY!



App Store



Google Play



SPECIALTY  
ADHESIVE

## Bosti-Set™

### THIN PORCELAIN TILE PANEL ADHESIVE & SOUND REDUCTION MEMBRANE

Bosti-Set™ is a one-component, non-sag, easy to trowel adhesive that is specifically formulated for the installation of thin (gauged) porcelain tile panels on interior vertical surfaces or counter tops. Bostik's patent pending Tenirex™ Polymer Technology used in this product is a revolutionary, proprietary formulation found only in Bosti-Set™. Tenirex™ Polymer Technology provides the adhesive remarkable instant grab and holding power, enabling panels to be rapidly set on walls and repositioned for up to 30 minutes with no slip or sag. Bosti-Set™ requires only a single coat in application for faster and easier installation than a conventional mortar installation and holds thin porcelain tiles as large as 1/4" x 5' x 10' (6mm x 1.5m x 3m).



www.youtube.com/BostikUSA



BOSTI-SET™				
Item No.	Color	Size	Barcode	Case Code
30854603	Beige w/black specs	4 gal	747224605177	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
4 gal pail	53.2 lbs	36	1,990 lbs	



# Big Tiles Require **BIG SOLUTIONS!**



## HIGH-PERFORMANCE MORTARS

Tile formats continue to expand in size, and Bostik's large and heavy tile mortars are set to fulfill your needs with this trend. Whether it's a multi-purpose large and heavy tile mortar, or the highest performing anti-sag mortar, our solutions will offer the support your project requires.

Large and heavy tiles (defined as having at least one side greater than 15" long, including plank format tiles, or tiles weighing more than 5 pounds per square foot) will often require a larger trowel size, along with a

large & heavy tile mortar to achieve the mortar coverage requirements of our industry. These large and heavy tile mortars will resist slumping on floors, sagging on walls, and hold a ridge better than traditional thin-set mortar.

The use of surface preparation products to flatten floors and walls before the application of large & heavy tile mortars will result in a more expeditious and consistent application of mortar and tile.

For more information about large & heavy tile mortars, scan this code, or visit: [bostik.com/us](https://www.bostik.com/us)





## Glass-Mate™

### GLASS TILE MORTAR

Bostik Glass-Mate™ is a premium, polymer-modified, thinset mortar that exhibits superior bond strength, durability, non-sag properties and workability. Its bright white color and high polymer content make it ideal for setting individual glass tiles, sheet mounted glass tile, and most types of tile or natural stone in thinset applications over cement-based or masonry substrates.



## Reflex®

### ULTRA-PREMIUM POLYMER-MODIFIED MORTAR

Bostik Reflex® Ultra-Premium Polymer-Modified Mortar is for interior or exterior installations to set all types of porcelain, siltstone, ceramic, glass, granite, slate, marble, limestone, thin porcelain tiles, large porcelain panels and dimensional stone tiles. Reflex® has excellent mixing and application properties. Use over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced™, Bostik Black-Top™, Bostik GoldPlus™; existing, well-bonded vinyl/VCT or ceramic tile and cutback adhesive residue (dry only).



## StoneWall™

### HIGH PERFORMANCE AND NON-SAG MORTAR

Bostik StoneWall™ is for interior or exterior, commercial or residential installations to set all types of porcelain, siltstone, ceramic, granite, slate, marble, limestone and dimensional stone tiles. StoneWall™ is formulated to prevent large bodied ceramic, porcelain and stone tiles from slipping in vertical applications. Bostik StoneWall™ is also suitable for installing floor tiles. Use over properly prepared concrete; structurally sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced™; Bostik BlackTop™; Bostik GoldPlus™; existing, well-bonded vinyl composition tile (VCT) or ceramic tile; and cutback adhesive residue (dry only).



## Big Tile & Stone™

### POLYMER-MODIFIED LARGE AND HEAVY TILE MORTAR

Bostik Big Tile & Stone™ is a polymer-modified, large & heavy tile mortar used for interior or exterior installations to set all large sized ceramic, porcelain, granite, slate, marble, limestone, thin porcelain tiles, large porcelain panels and dimensional stone tiles. Bostik Big Tile & Stone™ may also be used for vertical applications. Use over structurally-sound: properly prepared concrete, exterior grade plywood (interior/dry use only), cementitious backer board, Bostik Ultra-Set® Advanced™, Bostik Black-Top™, Bostik GoldPlus™ and existing, well-bonded vinyl composition tile (VCT) or ceramic tile. Big Tile & Stone™ may be used for uneven tile and stone thicknesses; or to minimize lippage. Big Tile & Stone™ white formulation is approved for non-sag applications for tiles up to 12" x 24".



## Single-Flex® FS

### FAST SETTING PREMIUM MULTI-PURPOSE POLYMER-MODIFIED THINSET MORTAR

Bostik Single-Flex® FS Fast Setting Premium Multi-Purpose Polymer-Modified Thinset Mortar is for interior or exterior installations to set all types of ceramic, porcelain, granite, slate, marble, limestone, and dimensional stone tiles. Use over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced™, Bostik Black-Top™ and Bostik GoldPlus™; and existing, well-bonded vinyl composition tile (VCT) or ceramic tile.



## Single-Flex®

### PREMIUM MULTI-PURPOSE POLYMER-MODIFIED THINSET MORTAR

Bostik Single-Flex® Premium Multi-Purpose Polymer-Modified Thinset Mortar is for interior or exterior installations to set all types of ceramic, porcelain, granite, slate, marble, limestone and dimensional stone. Use over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced™, Bostik Black-Top™ and Bostik GoldPlus™; and existing, well-bonded vinyl composition tile (VCT) or ceramic tile.



## Large Format Floor™

### POLYMER-MODIFIED MORTAR FOR LARGE FORMAT CERAMIC FLOOR TILES

Bostik Large Format Floor™ is a polymer-modified mortar designed for floor installations of natural stone, granite, slate, marble, porcelain tiles and large format ceramic tiles. Use over properly prepared, structurally sound-concrete, exterior grade plywood (interior/dry use only); cementitious backer board and existing ceramic tile.



## Bostik PM™

### MULTI-PURPOSE POLYMER-MODIFIED THINSET MORTAR

Bostik PM™ Multi-Purpose Polymer-Modified Thinset Mortar is for interior or exterior installations to set all types of ceramic, porcelain, granite, slate, marble, limestone, and dimensional stone tiles. Use over properly prepared concrete; structurally-sound, exterior grade plywood (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced™, Bostik Black-Top™ and Bostik GoldPlus™; and existing, well-bonded vinyl composition tile (VCT) or ceramic tile.



## Porcelain-Mate™

### POLYMER-MODIFIED PORTLAND CEMENT THINSET MORTAR

Bostik Porcelain-Mate™ is for interior or exterior\* installations to set all types of ceramic, porcelain, granite, slate, marble, limestone and dimensional stone tiles. Use over properly prepared concrete, cement backer board, cured mortar beds, brick, cement block, and Bostik GoldPlus™.

\* Mixed with 425™ admixture



## Ditra-Set™

### PORTLAND CEMENT AND LARGE AND HEAVY TILE MORTAR FOR SCHLUTER®-DITRA® SCHLUTER®-KERDI® AND UNCOUPLING AND WATERPROOFING MEMBRANES

Bostik Ditra-Set™ is composed of select, proprietary chemicals, carefully graded aggregates and purified cements. It provides outstanding workability, excellent durability, significant leveling characteristics and superior bond strengths in interior and exterior applications when used in conjunction with the Schluter®-DITRA® uncoupling membrane and Schluter®-KERDI® waterproofing membrane. Use Bostik Ditra-Set™ to install the membranes over substrates approved by Schluter®-Systems and to set ceramic, porcelain, and stone tile over Schluter®-DITRA® and Schluter®-KERDI®.



## Tile-Mate® Premium

### PREMIUM, UNMODIFIED THINSET MORTAR

Bostik Tile-Mate® Premium Thinset Mortar is composed of select, proprietary chemicals, carefully graded aggregates and Portland cement. Bostik Tile-Mate® Premium Thinset Mortar is pre-blended and ready to use. It provides superior bond strengths, excellent durability and outstanding workability. Bostik Tile-Mate® Premium Thinset Mortar is for interior or exterior applications to set all types of ceramic, porcelain, granite, slate, marble, limestone, and dimensional stone tiles. Use over properly prepared concrete; structurally sound, exterior grade plywood\* (interior/dry use only); cementitious backer board; Bostik Ultra-Set® Advanced™, Bostik Black-Top™, Bostik GoldPlus™ and existing, well-bonded vinyl composition tile (VCT)\* or ceramic tile\*.

\*When mixed with Bostik 425 Multi-Purpose Acrylic Latex Admixture.

## MORTARS & THINSETS

Item No.	Color	Size	Barcode	Case Code
<b>Glass-Mate™</b>				
30850788	White	25 lb	747224601223	--
<b>Reflex®</b>				
30850739	White	50 lb	747224007186	--
30850877	Gray	50 lb	747224009180	--
<b>StoneWall™</b>				
30850752	White	50 lb	747224007377	--
<b>Big Tile &amp; Stone™</b>				
30850784	White	50 lb	747224009142	--
30850792	Gray	50 lb	747224009623	--
<b>Single-Flex® FS</b>				
30850783	White	50 lb	747224265241	--
30850794	Gray	50 lb	747224262240	--
<b>Single-Flex®</b>				
30850737	White	50 lb	747224254245	--
30850785	Gray	50 lb	747224257246	--
<b>Large Format Floor™</b>				
30850754	White	50 lb	747224604644	--
30850791	Gray	50 lb	747224604637	--
<b>Bostik PM™</b>				
30850738	White	50 lb	747224273246	--
30850786	Gray	50 lb	747224240347	--
<b>Ditra-Set™</b>				
30850787	White	50 lb	747224009197	--
30850790	Gray	50 lb	747224602305	--
<b>Tile-Mate® Premium</b>				
30850735	White	50 lb	747224007100	--
30850755	Gray	50 lb	747224250247	--
<b>Porcelain-Mate™</b>				
30850763	White	50 lb	747224007698	--
30850793	Gray	50 lb	747224009692	--
<b>Package Size</b>		<b>Weight/Unit</b>	<b>Units/Pallet</b>	<b>Weight/Pallet</b>
50 lb bag		50 lbs	48	2,460 lbs
25 lb bag		25 lbs	96	2,460 lbs

TRADITIONAL  
MORTARS & THINSETS

## Rapid Cure™ Product Line

# FAST ACTING Superior Performance



**RapidCure™ from Bostik** is an innovative technology that is formulated for superior, fast-acting performance in a select line of products for every stage of surfacing installation.

Contact your sales representative for more information on the product systems available within the RapidCure™ family. For additional features and for details on application guidelines, reference each product's technical data sheet.

# 1900™

## EPOXY MODIFIED GROUT & MORTAR ADMIXTURE

Bostik 1900™ Epoxy Modified Grout and Mortar Admixture, when mixed with Bostik Hydroment® Ceramic Tile Grout™ (sanded only), is for interior and exterior installations to set and/or grout all ceramic, porcelain, quarry, granite, slate, marble, limestone and dimensional stone tiles. Exceeds ANSI A118.8.



EXCELLENT WORKABILITY

EASY CLEAN-UP

SUPERIOR CHEMICAL RESISTANCE

1900™			
Item No.	Size	Barcode	Case Code
30850796	Regular Unit Mix with 25 lb Ceramic Tile Grout™ Sanded	747224019004	--

ADMIXTURES

# 425™

## MULTI-PURPOSE ACRYLIC LATEX ADMIXTURE

Bostik 425™ Multi-Purpose Acrylic Latex Admixture is a high solids acrylic emulsion designed to improve the performance of Bostik Tile-Mate®, Hydroment® Ceramic Tile Grout™, Hydroment® Dry Tile Grout™, Single-Flex® FS, UltraFinish™ Pro and UltraRamp™, mortar and jobsite prepared mortar beds.



MORTAR ADMIXTURE & GROUT ADDITIVE

MINIMIZES CRACKING & REDUCES STAINING

USE INSTEAD OF WATER TO IMPROVE WATER RESISTANCE & DURABILITY

425™			
Item No.	Size	Barcode	Case Code
30850686	5 gal	747224425249	--
30850685	4x1 gal/case*	747224425065	1074722425062

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
5 gal	45 lb	36	1,680 lbs
4 x 1 gal/case*	39 lb	36	1,464 lbs

\*Sold in full cases only

# D-2001® Ultra-Premium™

## SUPERIOR PERFORMANCE CERAMIC TILE MASTIC

Bostik D-2001® Ultra-Premium™ Mastic is a high performance adhesive for the interior installation of all types of ceramic and stone tile (except moisture sensitive marble). Bostik D-2001® Ultra-Premium™ Mastic is ready to use for a fast, professional installation and provides excellent vertical grab for large bodied tiles. Bostik D-2001® Ultra-Premium™ Mastic exceeds the requirements of ANSI A136.1 Type I and II.



EXCEEDS ANSI A136.1,  
TYPE I & TYPE II

FAST, PROFESSIONAL  
INSTALLATION

EXCELLENCE FOR LARGE FORMAT  
CERAMIC TILES ON FLOORS & WALLS

### D-2001® Ultra Premium™

Item No.	Size	Barcode	Case Code
30850622	3.5 gal	747224329257	--
30850623	4x1 gal/case*	747224329219	10747224329216
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
5 gal	45 lb	36	1,680 lbs
4 x 1 gal/case*	39 lb	36	1,464 lbs

\*Sold in full cases only

# Multi-Purpose™

## FLOOR & WALL MASTIC

Bostik Multi-Purpose™ Mastic is a high performance adhesive for the interior installation of most types of ceramic and stone tile (except moisture sensitive marble). Bostik Multi-Purpose™ Mastic is ready to use for a fast, professional installation and provides excellent vertical grab for large bodied tiles. Bostik Multi-Purpose™ Mastic exceeds the requirements of ANSI A136.1 Type I and II.

EXCEEDS ANSI A136.1,  
TYPE I & TYPE II

EXCELLENT GRAB

EASY TO SPREAD



### Multi-Purpose™

Item No.	Size	Barcode	Case Code
30850620	3.5 gal	747224398536	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
5 gal	45 lb	36	1,680 lbs

# Professional Grade™

## CERAMIC TILE MASTIC

Professional Grade™ Mastic is a high performance adhesive for the interior installation of most types of ceramic and stone tile (except moisture sensitive marble). Bostik Professional Grade™ Mastic is ready to use for a fast, professional installation and provides excellent vertical grab for large bodied tiles.

EXCEEDS ANSI A136.1,  
TYPE I

EASY INSTALLATION


EXCELLENT VERTICAL GRAB  
FOR MOST WALL TILES




### Professional Grade™

Item No.	Size	Barcode	Case Code
30850621	3.5 gal	747224399250	--
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
5 gal	45 lb	36	1,680 lbs

# Dimension<sup>®</sup> RapidCure<sup>™</sup> Color Guide\*



Snowflake H690



Polar White H691



Diamond H600




Amber H621



Aquamarine H660



Aventurine H622



Bronze H710




Citrine H640



Copper H720




Hematite H671



Jade H650



Moonstone H670



Onyx H680



Opal H610



Silver H700



Topaz H620



BLENDING NATURALLY WITH TILE

NO SEALING REQUIRED

3 DAY WATER EXPOSURE

## Dimension<sup>®</sup> RapidCure<sup>™</sup>



[www.youtube.com/BostikUSA](http://www.youtube.com/BostikUSA)

### GLASS FILLED, PRE-MIXED, URETHANE GROUT

Dimension<sup>®</sup> RapidCure<sup>™</sup> is a pre-mixed, water based, urethane grout offering the ultimate in color accuracy, water resistance and stain/crack protection. This grout contains Bostik's HXD<sup>™</sup> Technology resin system, and is the world's first glass-based, pre-mixed grout.

Dimension<sup>®</sup> RapidCure<sup>™</sup> is ideally suited for glass, metal, natural stone and even porcelain tile installations where the subtle sparkle of reflective light brings an elegant sophistication to the tile selection. It is a simple to install grout, designed to bring long lasting beauty and protection to grout joints with an easy installation experience. Simply stir, apply and clean as you go.

Dimension<sup>®</sup> RapidCure<sup>™</sup> is approved for intermittent water exposure after only 3 days of cure. It can be used in horizontal (floor) grout joint widths from 1/16" to 1/2" and vertical (wall) grout joints from 1/16" to 1/4".

Item No.	Color	Code	Size	Barcode
30851149	Amber	H621	18 lb	747224600936
30607706	Amber	H621	9 lb	747224601087
30851159	Aquamarine	H660	18 lb	747224600981
30606345	Aquamarine	H660	9 lb	747224601131
30851151	Aventurine	H622	18 lb	747224600943
30606404	Aventurine	H622	9 lb	747224601094
30851170	Bronze	H710	18 lb	747224601032
30607705	Bronze	H710	9 lb	747224601186
30851155	Citrine	H640	18 lb	747224600967
30606402	Citrine	H640	9 lb	747224601117
30851172	Copper	H720	18 lb	747224601049
30606346	Copper	H720	9 lb	747224601193
30851143	Diamond	H600	18 lb	747224600905
30606347	Diamond	H600	9 lb	747224601056
30851163	Hematite	H671	18 lb	747224601001
30607698	Hematite	H671	9 lb	747224601155
30851157	Jade	H650	18 lb	747224600974
30606348	Jade	H650	9 lb	747224601124
30851161	Moonstone	H670	18 lb	747224600998
30606401	Moonstone	H670	9 lb	747224601148
30851165	Onyx	H680	18 lb	747224601018
30606349	Onyx	H680	9 lb	747224601162
30851145	Opal	H610	18 lb	747224600912
30607697	Opal	H610	9 lb	747224601063
30611089	Polar White	H691	18 lb	747224605511
30611110	Polar White	H691	9 lb	747224605528
30851168	Silver	H700	18 lb	747224601025
30606350	Silver	H700	9 lb	747224601179
30851166	Snowflake	H690	18 lb	747224605030
30851199	Snowflake	H690	9 lb	747224605023
30851147	Topaz	H620	18 lb	747224600929
30606403	Topaz	H620	9 lb	747224601070



Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
18 lb pail	18 lbs	80	1,500 lbs
9 lb pail	9 lbs	120	1,140 lbs

\*Color samples are printed reproductions and should only be used as approximate guides to appearance. Actual shade and texture will depend on jobsite conditions, installation techniques, tile characteristics, lighting and other factors beyond Bostik's control. It is recommended to verify appearance with a test area before main installation commences.

**COVERAGE RATES**

Tile Size	18 LB. UNIT (FT <sup>2</sup> )						9 LB. UNIT (FT <sup>2</sup> )					
	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"
1" x 1" x 1/4"	67	36	--	--	--	--	33	18	--	--	--	--
2" x 2" x 1/4"	128	67	--	--	--	--	64	33	--	--	--	--
3" x 6" x 3/16"	200	102	70	54	--	--	100	51	35	27	--	--
4" x 4" x 3/16"	200	102	70	53	--	--	100	51	35	27	--	--
4 1/4" x 4 1/4" x 3/16"	212	108	74	56	39	31	106	54	37	28	20	15
4" x 8" x 1/2"	166	84	57	44	30	23	83	42	29	22	15	12
6" x 6" x 1/2"	186	94	64	49	33	26	93	47	32	24	17	13
8" x 8" x 3/8"	329	166	112	85	58	45	165	83	56	43	29	22
12" x 12" x 1/4"	737	372	250	189	128	97	369	186	125	94	64	49
12" x 12" x 3/8"	492	248	166	126	85	65	246	124	83	63	43	32
13" x 13" x 3/8"	532	268	180	136	92	70	266	134	90	68	46	35
16" x 16" x 3/8"	654	329	221	166	112	85	327	165	110	83	56	43
18" x 18" x 1/4"	1103	555	372	280	189	143	552	277	186	140	94	72
18" x 18" x 3/8"	736	370	248	187	126	95	368	185	124	93	63	48
12" x 24" x 3/8"	1963	988	662	500	337	256	982	494	331	250	169	128
12" x 24" x 1/4"	982	494	331	250	169	128	491	247	166	125	84	64
24" x 24" x 3/8"	979	492	329	248	166	126	490	246	165	124	83	63

Average coverage per container - coverage will vary based on tile size, joint width and depth.

- CONSISTENT COLOR EVERY TIME
- NO SEALING REQUIRED
- SUBMERSIBLE



# TruColor<sup>®</sup> RapidCure<sup>™</sup>



[www.youtube.com/BostikUSA](http://www.youtube.com/BostikUSA)

## PREMIUM, PRE-MIXED, URETHANE GROUT

TruColor<sup>®</sup> RapidCure<sup>™</sup> Premium, Pre-Mixed, Urethane Grout is a water-based grout offering the ultimate in color accuracy, water resistance, and stain and crack protection. This grout also contains Bostik's **HXD<sup>™</sup>** Technology resin system. **HXD<sup>™</sup>** technology enables only Bostik to offer the highest performance resin system of any pre-mixed grout available. The resin system is the most important factor in grout performance. This breakthrough in polymer chemistry enables Bostik premium, pre-mixed grouts to offer unmatched toughness, water and stain resistance. It's no surprise that Bostik is the most specified pre-mixed grout in the architect and design community today. Suitable applications include interior & exterior installations in dry to intermittent wet or submerged applications. It can be used in horizontal (floor) grout joint widths from 1/16" to 1/2" and vertical (wall) grout joints from 1/16" to 1/4".



### TRUCOLOR<sup>®</sup> RAPIDCURE<sup>™</sup>

Item No.	Color	Code	Size	Barcode
30800982	Alabaster	H189	18 lb	747224600677
30607710	Alabaster	H189	9 lb	747224600875
30800980	Almond	H153	18 lb	747224600615
30607141	Almond	H153	9 lb	747224600813
30800981	Antique White	H135	18 lb	747224600509
30607255	Antique White	H135	9 lb	747224600707
30800985	Champagne	H138	18 lb	747224600516
30607151	Champagne	H138	9 lb	747224600714
30800993	Char Black	H139	18 lb	747224600523
30801001	Char Black	H139	9 lb	747224600721
30800988	Classic Bone	H158	18 lb	747224600622
30800860	Classic Bone	H158	9 lb	747224600820
30800987	Delorean Gray	H160	18 lb	747224600639
30607915	Delorean Gray	H160	9 lb	747224600837
30850956	Flash Walnut	H141	18 lb	747224604378
30850957	Flash Walnut	H141	9 lb	747224604385
30800984	French Gray	H142	18 lb	747224600530
30607709	French Gray	H142	9 lb	747224600738
30611160	Hemp	H283	18 lb	747224606099
30611156	Hemp	H283	9 lb	747224606082
30800986	Jamoca	H162	18 lb	747224600646
30607916	Jamoca	H162	9 lb	747224600844
30801243	Kahlua Cream	H143	18 lb	747224600547
30800997	Kahlua Cream	H143	9 lb	747224600745
30850885	Latte	H192	18 lb	747224600684
30800998	Latte	H192	9 lb	747224600882
30800979	Linen	H163	18 lb	747224600653
30607254	Linen	H163	9 lb	747224600851
30611158	Lunar	H196	18 lb	747224605252
30611153	Lunar	H196	9 lb	747224605337
30800992	Misty Gray	H144	18 lb	747224600554
30800999	Misty Gray	H144	9 lb	747224600752
30850933	Mobe Pearl	H145	18 lb	747224600561
30800994	Mobe Pearl	H145	9 lb	747224600769
30611159	Mushroom	H224	18 lb	747224606068
30611155	Mushroom	H224	9 lb	747224606075
30800983	Natural	H146	18 lb	747224600578
30607708	Natural	H146	9 lb	747224600776
30850937	Portabella	H184	18 lb	747224600660
30800995	Portabella	H184	9 lb	747224600868
30800991	Sand Beige	H148	18 lb	747224600585
30801002	Sand Beige	H148	9 lb	747224600783
30850925	Shadow	H195	18 lb	747224600691
30801000	Shadow	H195	9 lb	747224600899
30854945	Silver Bullet	H168	18 lb	747224605207
30854944	Silver Bullet	H168	9 lb	747224605283
30854943	Steel	H200	18 lb	747224605214
30854942	Steel	H200	9 lb	747224605290
30854941	Storm	H198	18 lb	747224605221
30854940	Storm	H198	9 lb	747224605306
30850949	Summer Wheat	H150	18 lb	747224600592
30800996	Summer Wheat	H150	9 lb	747224600790
30854937	Timber	H199	18 lb	747224605245
30854936	Timber	H199	9 lb	747224605320
30854939	Taupe	H151	18 lb	747224605238
30854938	Taupe	H151	9 lb	747224605313
30800990	White	H152	18 lb	747224600608
30607150	White	H152	9 lb	747224600806

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
18 lb pail	18 lbs	50	960 lbs
9 lb pail	9 lbs	100	960 lbs

**GROUTS**

# GROUT & SEAL Color Guide

TruColor® RapidCure™  
 Hydroment® Vivid™  
 EzPoxy™ EzClean™

Hydroment® Ceramic Tile Grout™ (Sanded)  
 Hydroment® Dry Tile Grout™ (Unsanded)  
 Pure Silicone™ Sealant    Tub & Tile Caulk™



\*Tub & Tile Caulk™ Sanded is available in all 35 colors, Tub & Tile™ Caulk Unsanded is available in select colors. Color samples are printed reproductions and should only be used as approximate guides to appearance. Actual shade and texture will depend on jobsite conditions, installation techniques, tile characteristics, lighting and other factors beyond Bostik's control. It is recommended to verify appearance with a test area before main installation commences.



## EzPoxy™ EzClean™ 100% SOLIDS EPOXY MORTAR & GROUT

Bostik EzPoxy™ EzClean™ is a 100% Solids Epoxy Mortar & Grout with outstanding application and clean-up properties. This easy-to-use epoxy offers uniform color, exceptional durability, stain and sag resistance and never needs to be sealed. It is ideal for use in commercial and residential kitchens, lobbies, bathrooms, fast food restaurants, factories, shopping malls, steam rooms, swimming pools and fountains.

**As a mortar:** EzPoxy™ EzClean™ is a suitable bonding mortar for interior applications only. Use to set all ceramic, quarry, porcelain, granite, slate, pre-cast Terrazzo, dimensional stone tiles, and moisture-sensitive stone.

**As a grout:** Use to grout all ceramic, quarry, porcelain, granite, slate, and pre-cast Terrazzo, dimensional stone tiles, for use in grout joints from 1/16" to 1/2" wide.



EZPOXY™ EZCLEAN™ - RESIN KIT				
Item No.	Color/Part	Code	Size	Barcode
30850997	Resin Kit	--	Part A: 48 fl oz Part B: 15.5 fl oz	747224603852

EZPOXY™ EZCLEAN™ - SAND/COLORANT				
Item No.	Color	Code	Size	Barcode
30851000	Alabaster	H189	1 pack*	747224603906
30851002	Almond	H153	1 pack*	747224603920
30851003	Antique White	H135	1 pack*	747224603937
30851024	Brick	H136	1 pack*	747224604156
30613225	Buff	H188	1 pack*	747224606662
30613224	Cashmere	H178	1 pack*	747224606655
30851004	Champagne	H138	1 pack*	747224603944
30851014	Char Black	H139	1 pack*	747224604040
30850999	Classic Bone	H158	1 pack*	747224603890
30851016	Clay	H197	1 pack*	747224604064
30851012	Delorean Gray	H160	1 pack*	747224604026
30851009	Flash Walnut	H141	1 pack*	747224603999
30851013	French Gray	H142	1 pack*	747224604033
30613071	Hemp	H283	1 pack*	747224606624
30613226	Heron Blue	H171	1 pack*	747224606631
30851006	Jamoca	H162	1 pack*	747224603968
30613218	Kahlua Cream	H143	1 pack*	747224606648
30851005	Latte	H192	1 pack*	747224603951
30851001	Linen	H163	1 pack*	747224603913
30851020	Lunar	H196	1 pack*	747224604101
30851011	Misty Gray	H144	1 pack*	747224604019
30851010	Mobe Pearl	H145	1 pack*	747224604002
30613223	Mushroom	H224	1 pack*	747224606679
30613215	Natural	H146	1 pack*	747224606617
30613216	Peaches & Cream	H147	1 pack*	747224606594
30851015	Portabella	H184	1 pack*	747224604057
30851008	Sand Biege	H148	1 pack*	747224603982
30613217	Shadow	H195	1 pack*	747224606600
30851018	Silver Bullet	H168	1 pack*	747224604088
30851019	Steel	H200	1 pack*	747224604095
30851021	Storm	H198	1 pack*	747224604118
30851007	Summer Wheat	H150	1 pack*	747224603975
30851022	Taupe	H151	1 pack*	747224604132
30851017	Timber	H199	1 pack*	747224604071
30850998	White	H152	1 pack*	747224603883

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
Resin kit: Part A - 48 fl oz Part B - 15.5 fl oz	6.8 lbs	60	468 lbs
Sand/colorant	11.4 lbs	144	1,701 lbs

\*1 pack of sand/colorant must be ordered with EzPoxy™ EzClean™ Resin Kit (Part A+B)





HYDROMENT® VIVID™				
Item No.	Color	Code	Size	Barcode
30853195	Alabaster	H189	25 lb	747224603555
30853234	Almond	H153	25 lb	747224603777
30850780	Antique White	H135	25 lb	747224604415
30853237	Brick	H136	25 lb	747224605092
30853222	Buff	H188	25 lb	747224603456
30853223	Cashmere	H178	25 lb	747224603470
30853233	Champagne	H138	25 lb	747224603753
30853220	Char Black	H139	25 lb	747224603418
30853198	Classic Bone	H158	25 lb	747224603814
30853217	Clay	H197	25 lb	747224603357
30853226	Delorean Gray	H160	25 lb	747224603579
30850778	Flash Walnut	H141	25 lb	747224604392
30853227	French Gray	H142	25 lb	747224603593
30612854	Hemp	H283	25 lb	747224606570
30853224	Heron Blue	H171	25 lb	747224603517
30853218	Jamoca	H162	25 lb	747224603371
30853219	Kahlua Cream	H143	25 lb	747224603395
30853235	Latte	H192	25 lb	747224603791
30850782	Linen	H163	25 lb	747224604439
30853215	Lunar	H196	25 lb	747224603319
30853225	Misty Gray	H144	25 lb	747224603531
30853230	Mobe Pearl	H145	25 lb	747224603678
30612853	Mushroom	H224	25 lb	747224606501
30853231	Natural	H146	25 lb	747224603715
30853194	Peaches & Cream	H147	25 lb	747224603494
30853221	Portabella	H184	25 lb	747224603432
30853229	Sand Beige	H148	25 lb	747224603654
30853236	Shadow	H195	25 lb	747224603838
30853211	Silver Bullet	H168	25 lb	747224603234
30853216	Steel	H200	25 lb	747224603333
30853213	Storm	H198	25 lb	747224603272
30853228	Summer Wheat	H150	25 lb	747224603616
30853232	Taupe	H151	25 lb	747224603739
30853214	Timber	H199	25 lb	747224603296
30853196	White	H152	25 lb	747224603630
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
25 lb bag	25 lbs	48	1,200 lbs	

# Hydroment® Vivid™

## RAPID-CURING HIGH-PERFORMANCE GROUT

Hydroment® Vivid™ is a rapid-curing, premium grade, cement-based grout for demanding commercial and residential projects. Hydroment® Vivid™ offers consistent color technology with enhanced stain and efflorescence protection. It is both fiber reinforced and rapid curing, which offers early strength development for demanding, high performance installations. Hydroment® Vivid™ exceeds requirements of ANSI A118.7 and contains Bostik's Blockade® Antimicrobial Protection. For use in grout joints from 1/16" to 1/2" wide.



HyDrix™ Technology allows Bostik to precisely control the timing and formation of the chemical and physical matrix of Hydroment® Vivid™ grout during the curing process. This advancement in materials science creates

a micro structurally dense internal matrix that offers you the most durable, easy to use, cement-based grout available. This water tight matrix results in a superior grout joint which resists the penetration of liquids and most staining agents EZPOXY™ EZCLEAN™ while also exhibiting best in class efflorescence resistance.



[www.youtube.com/BostikUSA](http://www.youtube.com/BostikUSA)



GROUTS



# Hydroment<sup>®</sup> Dry Tile Grout<sup>™</sup> UNSANDED

**FOR USE IN GROUT JOINTS UP TO 1/8"**

Bostik Hydroment<sup>®</sup> Dry Tile Grout<sup>™</sup> (Unsanded) is formulated from select grades of ground quartz, Portland cement, colorfast pigments and other special proprietary ingredients. It provides superior strength and durability with a wide variety of tiles. Exceeds ANSI A118.6 when mixed with water and A118.7 when mixed with Bostik 425<sup>™</sup> Multi-Purpose Acrylic Latex Admixture. For use in grout joints up to 1/8".

## HYDROMENT<sup>®</sup> DRY TILE GROUT<sup>™</sup> (UNSANDED)

Item No.	Color	Code	Size	Barcode	Case Code
30851079	Alabaster	H189	25 lb	747224759177	--
30851080	Alabaster	H189	6 x 5 lb*	747224227591	10747224227598
30851065	Almond	H153	6 x 5 lb*	747224265227	10747224265224
30850765	Antique White	H135	6 x 5 lb*	747224770226	10747224770223
30850753	Brick	H136	6 x 5 lb*	747224601230	10747224601237
30851053	Buff	H188	6 x 5 lb*	747224221162	10747224221169
30850747	Cashmere	H178	6 x 5 lb*	747224227249	10747224227246
30850767	Champagne	H138	6 x 5 lb*	747224772220	10747224772227
30850775	Char Black	H139	25 lb	747224784179	--
30850776	Char Black	H139	6 x 5 lb*	747224784223	10747224784220
30851049	Classic Bone	H158	25 lb	747224114174	--
30851050	Classic Bone	H158	6 x 5 lb*	747224114228	10747224114225
30851063	Clay	H197	6 x 5 lb*	747224604354	10747224604351
30851070	Delorean Gray	H160	25 lb	747224635174	--
30851071	Delorean Gray	H160	6 x 5 lb*	747224635228	10747224635225
30850751	Flash Walnut	H141	6 x 5 lb*	747224727220	10747224727227
30850762	French Gray	H142	6 x 5 lb*	747224768223	10747224768220
30612868	Hemp	H283	25 lb	747224606587	--
30612865	Hemp	H283	6 x 5 lb*	747224606549	10747224606546
30851069	Heron Blue	H171	6 x 5 lb*	747224522221	10747224522228
30851066	Jamoca	H162	25 lb	747224604545	--
30851067	Jamoca	H162	6 x 5 lb*	747224284228	10747224284225
30850772	Kahlua Cream	H143	6 x 5 lb*	747224776228	10747224776225
30850746	Latte	H192	6 x 5 lb*	747224227225	10747224227222
30851075	Linen	H163	6 x 5 lb*	747224741226	10747224741223
30851061	Lunar	H196	6 x 5 lb*	747224604330	10747224604337
30850756	Misty Gray	H144	25 lb	747224761170	--
30850757	Misty Gray	H144	6 x 5 lb*	747224761224	10747224761221
30850769	Mobe Pearl	H145	6 x 5 lb*	747224773227	10747224773224
30612864	Mushroom	H224	25 lb	747224606518	--
30612866	Mushroom	H224	6 x 5 lb*	747224606525	10747224606522
30612867	Natural	H146	25 lb	747224606709	--
30612855	Natural	H146	6 x 5 lb*	747224606693	10747224606690
30850773	Peaches & Cream	H147	25 lb	747224777171	--
30850774	Peaches & Cream	H147	6 x 5 lb*	747224777225	10747224777222
30851068	Portabella	H184	6 x 5 lb*	747224222893	10747224222890
30850749	Sand Beige	H148	6 x 5 lb*	747224725226	10747224725223
30850759	Shadow	H195	25 lb	747224604521	--
30850760	Shadow	H195	6 x 5 lb*	747224227669	10747224227666
30851072	Silver Bullet	H168	25 lb	747224604484	--
30851073	Silver Bullet	H168	6 x 5 lb*	747224648228	10747224648225
30851058	Steel	H200	25 lb	747224604309	--
30851059	Steel	H200	6 x 5 lb*	747224604316	10747224604313
30851057	Storm	H198	6 x 5 lb*	747224604293	10747224604290
30850744	Summer Wheat	H150	6 x 5 lb*	747224721228	10747224721225
30850771	Taupe	H151	6 x 5 lb*	747224775221	10747224775228
30851055	Timber	H199	6 x 5 lb*	747224604279	10747224604276
30850741	White	H152	25 lb	747224719171	--
30850742	White	H152	6 x 5 lb*	747224719225	10747224719222

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
25 lb bag	25 lbs	96	2,460 lbs
6 x 5 lb bag*	30 lbs	36	1,140 lbs

\*Sold in full cases only





**EXCEEDS ANSI A118.6 AND A118.7 REQUIREMENTS**

**CONTAINS BOSTIK'S BLOCKADE™ ANTIMICROBIAL PROTECTION**

**INTERIOR AND EXTERIOR, FLOORS, WALLS AND CEILING INSTALLATIONS**

# Hydroment® SANDED Ceramic Tile Grout™

**FOR USE IN GROUT JOINTS FROM 1/8" TO 1-1/2"**

Hydroment® Ceramic Tile Grout™ (Sanded) is a proven blend of carefully graded quartz aggregates, Portland cement, colorfast pigments and other special proprietary ingredients. It provides superior strength and durability with a wide variety of tiles. Hydroment® Ceramic Tile Grout™ is a polymer-modified grout that exceeds the requirements of ANSI A118.6 when mixed with water, and ANSI A118.7 mixed with Bostik 425™ Multi-Purpose Acrylic Latex Admixture. Meets ANSI A118.8 when mixed with Bostik 1900™ Modified Epoxy.



HYDROMENT® CERAMIC TILE GROUT™ (SANDED)					
Item No.	Color	Code	Size	Barcode	Case Code
30851047	Alabaster	H189	25 lb	747224157591	--
30851048	Alabaster	H189	4 x 9 lb*	747224357595	10747224357592
30851031	Almond	H153	25 lb	747224265159	--
30851032	Almond	H153	4 x 9 lb*	747224265357	10747224265354
30850711	Antique White	H135	25 lb	747224670151	--
30850712	Antique White	H135	4 x 9 lb*	747224670359	10747224670356
30850700	Brick	H136	25 lb	747224641151	--
30850701	Brick	H136	4 x 9 lb*	747224641359	10747224641356
30851029	Buff	H188	25 lb	747224151162	--
30851030	Buff	H188	4 x 9 lb*	747224351166	10747224351163
30850694	Cashmere	H178	25 lb	747224166241	--
30850695	Cashmere	H178	4 x 9 lb*	747224356246	10747224356243
30850713	Champagne	H138	25 lb	747224672155	--
30850714	Champagne	H138	4 x 9 lb*	747224672353	10747224672350
30850727	Char Black	H139	25 lb	747224684158	--
30850728	Char Black	H139	4 x 9 lb*	747224684356	10747224684353
30851025	Classic Bone	H158	25 lb	747224114150	--
30851026	Classic Bone	H158	4 x 9 lb*	747224114358	10747224114355
30850729	Clay	H197	25 lb	747224604200	--
30850730	Clay	H197	4 x 9 lb*	747224604217	10747224604214
30851039	Delorean Gray	H160	25 lb	747224635150	--
30851040	Delorean Gray	H160	4 x 9 lb*	747224635358	10747224635355
30850698	Flash Walnut	H141	25 lb	747224627155	--
30850699	Flash Walnut	H141	4 x 9 lb*	747224627353	10747224627350
30850709	French Gray	H142	25 lb	747224668158	--
30850710	French Gray	H142	4 x 9 lb*	747224668356	10747224668353
30612863	Hemp	H283	25 lb	747224606563	--
30612840	Hemp	H283	4 x 9 lb*	747224606556	10747224606553
30851037	Heron Blue	H171	25 lb	747224522153	--
30851038	Heron Blue	H171	4 x 9 lb*	747224522351	10747224522358
30851033	Jamoca	H162	25 lb	747224284150	--
30851034	Jamoca	H162	4 x 9 lb*	747224284358	10747224284355
30850719	Kahlua Cream	H143	25 lb	747224676153	--
30850720	Kahlua Cream	H143	4 x 9 lb*	747224676351	10747224676358
30850692	Latte	H192	25 lb	747224166227	--
30850693	Latte	H192	4 x 9 lb*	747224356222	10747224356229
30851043	Linen	H163	25 lb	747224411587	--
30851044	Linen	H163	4 x 9 lb*	747224741356	10747224741353
30850725	Lunar	H196	25 lb	747224604187	--
30850726	Lunar	H196	4 x 9 lb*	747224604194	10747224604191
30850702	Misty Gray	H144	25 lb	747224661159	--
30850703	Misty Gray	H144	4 x 9 lb*	747224661357	10747224661354
30850715	Mobe Pearl	H145	25 lb	747224673152	--
30850716	Mobe Pearl	H145	4 x 9 lb*	747224673350	10747224673357
30612856	Mushroom	H224	25 lb	747224606495	--
30612852	Mushroom	H224	4 x 9 lb*	747224606532	10747224606539
30850704	Natural	H146	25 lb	747224664150	--
30850705	Natural	H146	4 x 9 lb*	747224664358	10747224664355
30850721	Peaches & Cream	H147	25 lb	747224677150	--
30850722	Peaches & Cream	H147	4 x 9 lb*	747224677358	10747224677355
30851035	Portabella	H184	25 lb	747224152893	--
30851036	Portabella	H184	4 x 9 lb*	747224352897	10747224352894
30850696	Sand Beige	H148	25 lb	747224625151	--
30850697	Sand Beige	H148	4 x 9 lb*	747224625359	10747224625356
30850706	Shadow	H195	25 lb	747224166661	--
30850707	Shadow	H195	4 x 9 lb*	747224356666	10747224356663
30851041	Silver Bullet	H168	25 lb	747224648150	--
30851042	Silver Bullet	H168	4 x 9 lb*	747224648358	10747224648355
30850731	Steel	H200	25 lb	747224604224	--
30850732	Steel	H200	4 x 9 lb*	747224604231	10747224604238
30850733	Storm	H198	25 lb	747224604248	--
30850734	Storm	H198	4 x 9 lb*	747224604255	10747224604252
30850690	Summer Wheat	H150	25 lb	747224621153	--
30850691	Summer Wheat	H150	4 x 9 lb*	747224621351	10747224621358
30850717	Taupe	H151	25 lb	747224675156	--
30850718	Taupe	H151	4 x 9 lb*	747224675354	10747224675351
30850723	Timber	H199	25 lb	747224604163	--
30850724	Timber	H199	4 x 9 lb*	747224604170	10747224604177
30850688	White	H152	25 lb	747224611154	--
30850689	White	H152	4 x 9 lb*	747224356116	10747224356113
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet		
25 lb bag	25 lbs	96	2,460 lbs		
4 x 9 lb bag*	36 lbs	36	1,356 lbs		

\*Sold in full cases only

GROUTS

# Grip N Grab™

## ADVANCED HYBRID POLYMER GRAB ADHESIVE

Bostik's Grip N Grab™ is an instant grab adhesive, based on advanced hybrid polymer technology, specifically designed to decrease installation time of vertical applications. Grip N Grab™ high initial bond strength provides the ability to grab heavy materials quickly without slippage, eliminating the need for secondary support on majority of applications. Grip N Grab™ cures under the influence of humidity to form a durable elastic rubber, that bonds to most building materials in a variety of applications. This 100% waterproof, low odor formula is designed for both interior and exterior projects. Grip N Grab™ is solvent free, has a quick cure time, and can even be used on damp or wet surfaces.



### Pure Silicone™

#### 100% SILICONE SEALANT

Pure Silicone™ sealant is a specially formulated, 100% neutral cure silicone sealant for a variety of substrates such as ceramic tile, slate, wood, metal, glass, fiberglass, laminate and plastic. For use as a flexible barrier between horizontal and vertical surfaces or any other change in plane such as expansion joints, fixtures, tub surrounds, sinks, toilets, vanities, electrical plumbing penetrations, floors, walls and ceilings.



### Tub & Tile Caulk™

#### SILICONIZED ACRYLIC CAULK

Tub & Tile Caulk™ is siliconized acrylic caulk provides a flexible seal that bonds to most common household surfaces. Ideal for filling joints where tiles abut dissimilar surfaces. Tub and Tile Caulk™ is available in sanded texture. Use around bathtub, showers, countertops, basins and many other interior areas a sealant is needed. Meets or exceed ASTM C834, standard specification for latex sealants.



www.youtube.com/BostikUSA

**EXTREME GREEN STRENGTH**

**INTERIOR AND EXTERIOR USE**

**IDEAL FOR VERTICAL APPLICATIONS**



#### GRIP N GRAB™

Item No.	Color	Size	Barcode	Case Code
30613729	White	12 x 9.5oz/ case*	7472249012	10747224901221
Package Size	Weight/case	Units/Pallet	Weight/Pallet	
9.5 fl oz	13 lbs	96 cases	1300 lbs	

CAULKS, SEALANTS, ADHESIVES & SPECIALTY

#### CAULKS, SEALANTS & ADHESIVES

Item No.	Color	Code	Size	Barcode	Case Code
Pure Silicone™					
30850967	Alabaster	H189	6 x 10.1oz/case*	747224602725	10747224602722
30850969	Almond	H153	6 x 10.1oz/case*	747224602749	10747224602746
30850970	Antique White	H135	6 x 10.1oz/case*	747224602756	10747224602753
30610736	Brick	H136	6 x 10.1oz/case*	747224605382	10747224605389
30611142	Buff	H188	6 x 10.1oz/case*	747224605405	10747224605402
30610738	Cashmere	H178	6 x 10.1oz/case*	747224605412	10747224605419
30850971	Champagne	138	6 x 10.1oz/case*	747224602763	10747224602760
30850982	Char Black	H139	6 x 10.1oz/case*	747224602879	10747224602876
30850966	Classic Bone	H158	6 x 10.1oz/case*	747224602718	10747224602715
30850983	Clay	H197	6 x 10.1oz/case*	747224602886	10747224602883
30850964	Clear	--	6 x 10.1oz/case*	747224604361	10747224604368
30850979	Delorean Gray	H160	6 x 10.1oz/case*	747224602848	10747224602845
30850976	Flash Walnut	H141	6 x 10.1oz/case*	747224602817	10747224602814
30850981	French Gray	H142	6 x 10.1oz/case*	747224602862	10747224602869
30611354	Hemp	H283	6 x 10.1oz/case*	747224606259	10747224606256
30611143	Heron Blue	H171	6 x 10.1oz/case*	747224605429	10747224605426
30850973	Jamoca	H162	6 x 10.1oz/case*	747224602787	10747224602784

\*Sold in full cases only

### 915FS™

#### FAST-SETTING SEALANT & ADHESIVE

915FS™ is a smooth, fast-setting polyurethane sealant and adhesive capable of dynamic joint movement totaling 70% (+/-35%) of original joint geometry. It cures to a tough, flexible rubber when exposed to moisture present in the atmosphere and has physical properties that will remain relatively stable over time in varying weather conditions.



### Heavy Duty™

#### PREMIUM CONSTRUCTION ADHESIVE

Heavy Duty™ Construction Adhesive (HDCA) is a premium grade polyurethane adhesive, that is specifically formulated for subfloor and floor joist assemblies, from site erected structures to factory constructed modular and mobile homes. Heavy Duty™ is specially formulated to bond to wet and frozen lumber.



#### CAULKS, SEALANTS & ADHESIVES

Item No.	Color	Code	Size	Barcode	Case Code
Pure Silicone™					
30610749	Kahlua Cream	H143	6 x 10.1oz/case*	747224605436	10747224605433
30850972	Latte	H192	6 x 10.1oz/case*	747224602770	10747224602777
30850968	Linen	H163	6 x 10.1oz/case*	747224602732	10747224602739
30850987	Lunar	H196	6 x 10.1oz/case*	747224602923	10747224602920
30850978	Misty Gray	H144	6 x 10.1oz/case*	747224602831	10747224602838
30850977	Mobe Pearl	H145	6 x 10.1oz/case*	747224602824	10747224602821
30611353	Mushroom	H224	6 x 10.1oz/case*	747224606266	10747224606263
30610750	Natural	H146	6 x 10.1oz/case*	747224605443	10747224605440
30610751	Peaches & Cream	H147	6 x 10.1oz/case*	747224605450	10747224605457
30610752	Portabella	H184	6 x 10.1oz/case*	747224605467	10747224605464
30850975	Sand Beige	H148	6 x 10.1oz/case*	747224602800	10747224602807
30850980	Shadow	H195	6 x 10.1oz/case*	747224602855	10747224602852
30850985	Silver Bullet	H168	6 x 10.1oz/case*	747224602909	10747224602906
30850986	Steel	H200	6 x 10.1oz/case*	747224602916	10747224602913
30850988	Storm	H198	6 x 10.1oz/case*	747224602930	10747224602937
30850974	Summer Wheat	H150	6 x 10.1oz/case*	747224602794	10747224602791
30850989	Taupe	H151	6 x 10.1oz/case*	747224602947	10747224602944
30850984	Timber	H199	6 x 10.1oz/case*	747224602893	10747224602890
30850965	White	H152	6 x 10.1oz/case*	747224602701	10747224602708

\*Sold in full cases only

## Blaze®

### URETHANE GROUT HAZE CLEANER

Blaze® is an effective way to clean tile surfaces after installing urethane based grouts. It can be used to remove haze which may remain after urethane grout installation. While urethane grout is typically easy to clean off the surface of most tiles, more difficult surfaces to clean will benefit from the use of Blaze®.



## Grout Sealer & Colorant™

### SEALS & RESTORES OR CHANGES THE COLOR OF GROUT

Grout Sealer & Colorant™ is ideal for changing or restoring your grout color, and offers enhanced stain resistance. It may be applied to sanded to unsanded cement grout, and is available in 35 colors to match the Bostik color lineup.



## Cartridge Guns

### CARTRIDGE DISPENSING GUNS

High quality cartridge guns designed to last and make your job easier. Our standard 7:1 drive is perfect for lower viscosity products, while our deluxe 26:1 drive is perfect for the higher viscosity hardwood adhesives and construction sealants.



## Ultimate™

### ADHESIVE REMOVER

Ultimate™ Adhesive Remover is a readily biodegradable, low odor, water rinseable solution. Use Ultimate™ to remove wet and cured urethane adhesive from the surface of pre-finished (non-wax) wood flooring.



CAULKS, SEALANTS & ADHESIVES (CONTINUED)					
Item No.	Color	Code	Size	Barcode	Case Code
<b>Tub &amp; Tile Caulk™ (Sanded)</b>					
30851107	Alabaster	H189	6 x 10.1oz/case*	747224987594	10747224987591
30851084	Almond	H153	6 x 10.1oz/case*	747224982650	10747224982657
30851099	Antique White	H135	6 x 10.1oz/case*	747224986702	10747224986709
30610760	Brick	H136	6 x 10.1oz/case*	747224605474	10747224605563
30851083	Buff	H188	6 x 10.1oz/case*	747224981165	10747224981162
30851091	Cashmere	H178	6 x 10.1oz/case*	747224986245	10747224986242
30851100	Champagne	138	6 x 10.1oz/case*	747224986726	10747224986723
30851104	Char Black	H139	6 x 10.1oz/case*	747224986849	10747224986846
30851081	Classic Bone	H158	6 x 10.1oz/case*	747224981141	10747224981148
30851113	Clay	H197	6 x 10.1oz/case*	747224604569	10747224604566
30851094	Delorean Gray	H160	6 x 10.1oz/case*	747224986351	10747224986358
30851093	Flash Walnut	H141	6 x 10.1oz/case*	747224986276	10747224986273
30851098	French Gray	H142	6 x 10.1oz/case*	747224986689	10747224986686
30611412	Hemp	H283	6 x 10.1oz/case*	747224606235	10747224606232
30611232	Heron Blue	H171	6 x 10.1oz/case*	747224605481	10747224605570
30851085	Jamoca	H162	6 x 10.1oz/case*	747224982841	10747224982848
30851103	Kahlua Cream	H143	6 x 10.1oz/case*	747224986764	10747224986761
30851090	Latte	H192	6 x 10.1oz/case*	747224986221	10747224986228
30851105	Linen	H163	6 x 10.1oz/case*	747224987419	10747224987416
30851112	Lunar	H196	6 x 10.1oz/case*	747224604590	10747224604597
30851096	Misty Gray	H144	6 x 10.1oz/case*	747224986610	10747224986617
30851101	Mobe Pearl	H145	6 x 10.1oz/case*	747224986733	10747224986730
30611411	Mushroom	H224	6 x 10.1oz/case*	747224606242	10747224606249
30610761	Natural	H146	6 x 10.1oz/case*	747224605498	10747224605587
30610764	Peaches & Cream	H147	6 x 10.1oz/case*	747224605504	10747224605594
30851086	Portabella	H184	6 x 10.1oz/case*	747224982896	10747224982893
30851092	Sand Beige	H148	6 x 10.1oz/case*	747224986252	10747224986259
30851097	Shadow	H195	6 x 10.1oz/case*	747224986665	10747224986662
30851095	Silver Bullet	H168	6 x 10.1oz/case*	747224986481	10747224986488
30851111	Steel	H200	6 x 10.1oz/case*	747224604583	10747224604580
30851109	Storm	H198	6 x 10.1oz/case*	747224604606	10747224604603
30851089	Summer Wheat	H150	6 x 10.1oz/case*	747224986214	10747224986211
30851102	Taupe	H151	6 x 10.1oz/case*	747224986757	10747224986754
30851110	Timber	H199	6 x 10.1oz/case*	747224604576	10747224604573
30851088	White	H152	6 x 10.1oz/case*	747224986115	10747224986112

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
6 x 10.1 oz cartridge	6 lbs/case*	145	870 lbs

\*Sold in full cases only

Adhesive				
Item No.	Color	Size	Barcode	Case Code
<b>Heavy Duty™ Construction Adhesive</b>				
30854485	Natural	12 x 10.1 oz /case*	747224699107	10747224699104
30850203	Natural	12 x 28 oz /case*	747224699206	10747224699203
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet	
10.1 oz cartridge	15 lbs/case*	96	1,490 lbs	
28 oz cartridge	26 lbs/case*	60	1,610 lbs	

\*Sold in full cases only

CAULKS, SEALANTS & ADHESIVES (CONTINUED)					
Item No.	Color	Code	Size	Barcode	Case Code
<b>915FS™ (Continued)</b>					
30850253	White	--	24 x 10.1oz /case*	747224900012	10747224900019
30850273	Light Gray	--	24 x 10.1oz /case*	747224900036	10747224900033
30850269	Aluminum Gray	--	24 x 10.1oz /case*	747224900050	10747224900057
30850271	Limestone	--	24 x 10.1oz /case*	747224900067	10747224900064
30850255	Capitol Tan	--	24 x 10.1oz /case*	747224900074	10747224900071
30850257	Black	--	24 x 10.1oz /case*	747224900104	10747224900101
30850275	White	--	12 x 20 oz /case*	747224900128	10747224900125
30850282	Light Gray	--	12 x 20 oz /case*	747224900142	10747224900149
30850280	Aluminum Gray	--	12 x 20 oz /case*	747224900166	10747224900163
30850281	Limestone	--	12 x 20 oz /case*	747224900173	10747224900170
30850277	Black	--	12 x 20 oz /case*	747224900210	10747224900217

Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
6 x 10.1 oz cartridge*	6 lbs/case	145	870 lbs
12 x 28 oz cartridge*	26 lbs/case	60	1,335 lbs
24 x 10.1 oz cartridge*	24 lbs/case	80	1,950 lbs
12 x 20 oz sausage*	24 lbs/case	100	2,430 lbs

\*Sold in full cases only

SPECIALTY PRODUCTS			
Item No.	Size	Barcode	Case Code
<b>Grout Sealer &amp; Colorant™</b>			
See order form	16 x 8 oz bottles/case	Contact customer service for colors	
<b>Blaze®</b>			
30852119	4 x 1 gal/case*	747224151261	1074722415126
30852120	12 x 24 oz/case*	747224251268	1074722425126
<b>Ultimate™</b>			
30850831	6 tubs/case*	747224656018	10747224656015
30850832	12 quarts/case*	747224656094	10747224656091
Package Size	Weight/Unit	Units/Pallet	Weight/Pallet
3 lb net, 4 lb gross / 16 oz can	4 lbs	N/A	N/A

\*Sold in full cases only

Cartridge Guns				
Item No.	Type	Size, per case	Drive	Barcode
30852242	Manual	10 oz cartridge gun, 12 per case	7:1	--
30852243	Manual	10 oz cartridge gun, 12 per case	26:1	--
30850385	Manual	20 oz sausage gun, 10 per case	12:1	--
30852244	Manual	28 oz (1 qt) tube gun, 12 per case	26:1	--

To view Bostik's YouTube channel scan this code, or visit [youtube.com/bostikUSA](https://www.youtube.com/bostikUSA)



CAULKS, SEALANTS, ADHESIVES & SPECIALTY



PUNTACERO  
Monterrey, Mx

# PanelTack™ Wall Panel and Façade Cladding System

## PanelTack HM™ Adhesive

### ADHESIVE FOR PANELTACK™ WALL PANEL AND FAÇADE CLADDING SYSTEM

PanelTack HM™ is a homogenous, highly elastic, smooth adhesive that provides a continuous bond of the panel to the support structure. PanelTack HM™ is suitable for use with various panels and wall cladding materials, including gauged porcelain tile panels, some high-pressure laminate panels (HPL), aluminum composite materials (ACM), pressed mineral wool (PMW), porous substrates, fiber cement boards (FCB), concrete, porcelain, ceramic and other natural materials.



HIGH MODULUS AND PERMANENTLY ELASTIC FOR TENSION DISTRIBUTION

INTERIOR AND EXTERIOR USE

CONTINUOUS BOND OF PANEL TO SUB-STRUCTURE



#### PANEL TACK™

Item No.	Size	Units/Case:	UPC Code	Case Code
30617904	20 oz sausage	12 sausages per case*	747224901231	10747224901238

\*Sold in full cases only

# PanelTack™ FoamTape™

## ADHESIVE TAPE AND SPACER FOR PANELTACK™ WALL PANEL AND FACADE CLADDING SYSTEM

FoamTape™ serves as a spacer for the adhesive bead, to ensure the proper adhesive thickness between the panel and the support structure. FoamTape™ provides an initial fixation of the panel or substrate until the PanelTack HM™ adhesive has cured, while ensuring a strong, lasting bond. FoamTape™ is suitable for use with almost any panels and wall cladding materials, including gauged porcelain tile panels, high-pressure laminate (HPL), aluminum composite materials (ACM), pressed mineral wool (PMW), fiber cement boards (FCB), concrete, porcelain, ceramic, porous substrates and other natural materials.

PROVIDES THE FIRST ADHESION ON THE FACADE PANELS WHILE THE ADHESIVE CURES

ENSURES THE PROPER ADHESIVE THICKNESS BETWEEN THE PANEL AND THE SUPPORT STRUCTURE

ENSURES A STRONG ADHESIVE BOND



# Primer Q™

## PRIMER FOR POROUS WALL PANEL AND FACADE CLADDING SYSTEMS

Primer Q™ is a transparent polyurethane suitable for use with various panels and wall cladding materials, including some fiber cement boards (FCB), porous substrates, and other materials.

FOR FCB PANELS

FOR POROUS SURFACES

ENSURES A STRONG ADHESIVE BOND



### PANEL TACK™ FOAM TAPE™

Item No.	Size	Units/Case:	UPC Code	Case Code
30617896	82 ft (25 m) per roll	20 rolls per case*	747224901279	10747224901276

### PRIMER Q™

Item No.	Size	Units/Case:	UPC Code	Case Code
30617984	33.8 fl oz	6 cans per case*	747224901262	10747224901269

\*Sold in full cases only

# Primer PanelTack™

## MULTIPURPOSE PRIMER AND CLEANER FOR WALL PANEL AND FACADE CLADDING SYSTEMS

Primer PanelTack™ is an all-in-one cleaner and primer used on the back of façade and decorative panels, and on aluminum and stainless steel support constructions. With high coverage and a 10-minute quick drying time, Primer PanelTack™ is suitable for use with various panels and wall cladding materials, including mesh-backed GTPP, high-pressure laminate (HPL), aluminum composite materials (ACM), and other materials

HPL AND ACM PANELS

TRANSPARENT, QUICK-DRYING

ENSURES A STRONG ADHESIVE BOND



# Primer MSP™

## PRIMER FOR FIBER CEMENT BOARDS, MINERAL AND POROUS WALL PANELS AND FACADE CLADDING SYSTEMS

Primer MSP™ is suitable for use with various panels and wall cladding materials, including some fiber cement boards (FCB), pressed mineral wool (PMW), natural stone, ceramic and porcelain tiles, brick, and concrete cladding panels.

FOR FCB, PMW, NATURAL STONE, CONCRETE, POROUS AND MINERAL CLADDING PANELS

FAST-DRYING

ENSURES A STRONG ADHESIVE BOND



### PRIMER PANEL TACK™

Item No.	Size	Units/Case:	UPC Code	Case Code
30617975	16.9 fl oz	6 cans per case*	747224901248	10747224901245

### PRIMER MSP™

Item No.	Size	Units/Case:	UPC Code	Case Code
30617983	16.9 fl oz	6 cans per case*	747224901255	10747224901252

\*Sold in full cases only



# Bostik Pro Rewards™ Contractor Loyalty Program

Now you can earn valuable reward points which can be redeemed for thousands of brand name items or travel rewards, all while growing your business!

To join the **Bostik Pro Rewards™** contractor loyalty program, visit: [www.awardlink.com/Bostik](http://www.awardlink.com/Bostik) where you'll be asked to create a user name and password for your account.

1. Submit your invoices via the ProRewards(tm) program web portal for eligible Bostik product purchases.
2. All qualifying Bostik product purchases will earn points deposited directly into your **Bostik Pro Rewards™** account.
3. Redeem the points you've earned for a wide variety of great rewards!



**Bostik, Inc.**  
11320 W. Watertown Plank Road  
Wauwatosa, WI 53226  
[www.bostik.com/us](http://www.bostik.com/us)

## JOIN NOW!

[www.awardlink.com/Bostik](http://www.awardlink.com/Bostik)