



ATTACHED TO YOUR WORLD

# ASA/Flooring products

CATALOGUE





## CONTENTS

### FLOORING PREPARATION & CONSTRUCTION GROUT

UL Screed	2
UL 200	2
Flowfill Grout GP	2

### PRIMERS, ADDITIVES & COATINGS

Ultra NP Primer	2
Prime Grip	3
Multiprime	3
N40 Primer	3
Bostik UL Primer	3

### MOISTURE VAPOUR BARRIER

Moisture Seal Part A & B Kit	4
------------------------------	---

### WATERPROOFING

Dampfix 3	4
Dampfix Gold	4

### CEMENTITIOUS TILE ADHESIVE

ASA Fixall	4
ASA Superfixall	5
ASA Megafix	5
ASA Conflex	5
ASA Conflex Gold	5
ASA Superglue	5
Rapidset	6
ASA Asaflex	6

### TIMBER FLOORING ADHESIVES

#### MS Flooring Adhesives

Ultraset 3 in 1	6
Ultraset HP	7

#### PU Timber Floor Adhesives

Ultraset SF	7
Ultraset DX	7

#### Approved for use with Laminex Strandfloor

Alpha Grip	7
------------	---

### TILING GROUT & SILICONE

ASA Sanded Quarry Grout	8
ASA White Smooth Grout	8
ASA Designer Grout	8
ASA Coloured Silicone	9
Kitchen & Bathroom Silicone	9
ASA Coloured Silicone	9

### ACCESSORIES


AXIOS Trowel	9
--------------	---

### ACOUSTIC SYSTEM - TIMBER FLOORING

Bostik Acoustic Sealant	10
Ultraset SF	10
Ultraset 3 in 1	10
ASA Asaphonic Mat	10

### ACOUSTIC SYSTEM - TILING

Ultraset SF	11
ASA Asaphonic Mat	11
Dampfix Gold	11
ASA Asaflex	11

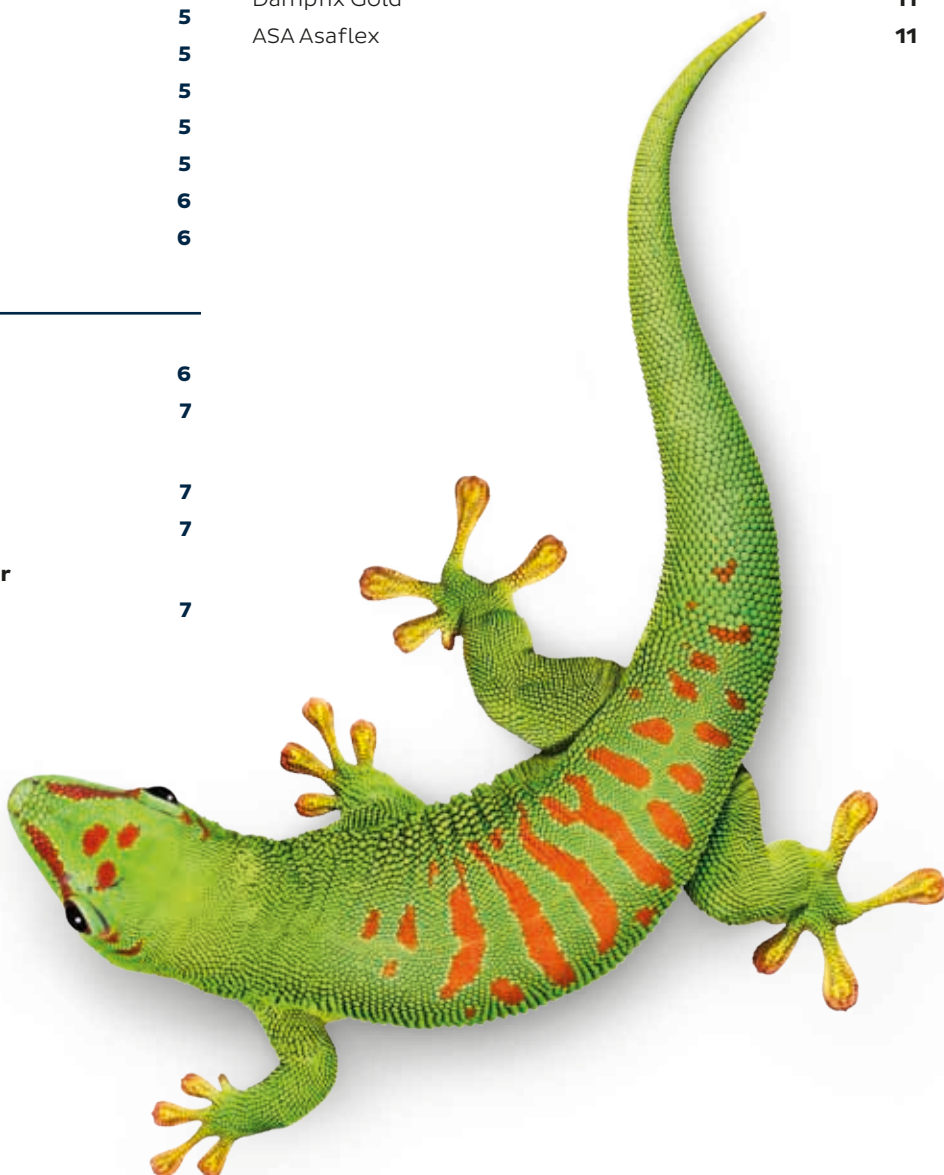



## UL Screed Levelling screed

Fast setting high build modified cementitious levelling screed. Specially formulated for quick and easy application to achieve required falls without shrinkage or cracking. Replaces the need for sand and cement mixing onsite. Can be walked on after 1 hour depending on site temperature and condition. Accepts waterproofing membrane after 4 hours at 20°C. Excellent bond strength to concrete and FC sheet substrate. Suitable for external balconies or in ramp applications; wet areas where controlled falls are required; residential, commercial or medium industrial applications; in conjunction with Bostik/ASA wet area internal waterproofing membranes. Most floor coverings can be applied after 24 hours.

CODE	COLOUR	SIZE	CARTON
30605691	Grey	20kg BAG	1



## UL 200 Superior Vinyl & Timber Underlay

Superior vinyl & timber underlay. Rapid hardening polymer modified cementitious underlay formulated for maximum flow without shrinkage or cracking. Very fast application, single operation and rapid curing; it accepts foot traffic in 2-3 hours. Receives vinyl and timber after 16 hours, carpet & tile after 6-8 hours. Can be applied directly onto prepared concrete surfaces. Suitable for reinstatement of new or existing concrete floors subject to foot traffic, industrial equipment, and fork lift traffic or trolleys; residential, commercial and industrial applications; heavy industrial traffic; wet areas (not immersed); with underfloor heating.

CODE	COLOUR	SIZE	CARTON
30605416	Grey	20kg BAG	1



## Flowfill Grout GP Multi purpose non-shrink cementitious grout

A general purpose non-shrink (class A) cementitious grout ideal for most void-filling grouting jobs. Application thickness 20-120mm. Just add water. Depending on amount of water, can be mixed to a stiff, plastic, flowable or fluid consistency. Lower water/cement ratio reduces drying shrinkage, increases durability and reduces permeability.

CODE	COLOUR	SIZE	CARTON
30804306	Grey	20kg bag	1

## PRIMERS, ADDITIVES & COATINGS



## Ultra NP Primer Two-part non-porous primer

High performance two-component primer for non-porous surfaces.

CODE	COLOUR	SIZE	CARTON
30804533	Light green (mixed)	2x 2 L kit	1



### Prime Grip Solvent free primer and adhesion promoter

A new generation of one component universal ready to use solvent free primer and adhesion promoter specifically designed to improve bonding onto impervious substrates. Bostik PrimeGrip Non-Porous Primer provides high strength film over non-porous surfaces that will allow bonding of cementitious products such as levelling compounds, tiling, render, etc.

CODE	COLOUR	SIZE	CARTON
30607467	Milky beige (wet) Translucent (dry)	7kg pail	1



### Multiprime Porous substrate primer

General purpose primer designed for use on porous surfaces. Fully compatible with ASA tile adhesives and most Bostik waterproofing membranes. Acrylic backbone allows it to be used outdoors. Ensure the surface to be primed is correctly installed, suitable for the intended use and adequately prepared. For use on porous surfaces such as concrete; render; fibre cement; plasterboard; autoclaved aerated concrete (AAC); timber. ASA Multiprime is a milky pink liquid.

CODE	COLOUR	SIZE	CARTON
30804159	Pink	1 L	10
30804170	Pink	5 L	4
30804109	Pink	20 L	1



### N40 Primer Non-porous surface primer/cleaner

A clear, non-staining solvent-based primer/cleaner for promoting the adhesion of polyurethane sealants, acrylic sealants and waterproof membrane systems to non-porous substrates; such as rigid plastics and most metals. Cleans and primes in one action.

CODE	COLOUR	SIZE	CARTON
30608603	Clear	1 L	12 (also sold separately)



### Megalastic Multi-purpose additive

A multi-purpose additive to upgrade the performance of cement based tile adhesives, grouts, screed and other similar systems. Improves adhesion, flexibility and water resistance but maintains workability, open time and pot life. Suitable for outdoors and full immersion once cured. For Increasing adhesive or grout performance; Immersed installations; general purpose additive for cement based systems.

CODE	COLOUR	SIZE	CARTON
30804112	White	1 L	1
30804111	White	5 L	1
30804113	White	20 L	1



### Bostik UL Primer High performance one component primer

UL Primer is a high performance one component primer for use on porous substrates. Polymer modified formula, designed for use with Bostik's Floor Levelling range.

CODE	COLOUR	SIZE	CARTON
306054243	White	5 L	1



## MOISTURE VAPOUR BARRIER



### Moisture Seal Part A & B Kit Epoxy water vapour barrier

Two-part water-based epoxy coating designed as a vapour barrier membrane to prevent water seepage and permeation through concrete floors. With an improved barrier rate, the product shows excellent adhesion and acts as a surface preparation for subsequent adhesives when laying floor coverings of all kinds. Tested and certified for Hydro Static Pressure.

CODE	COLOUR	SIZE	CARTON
30613027	Part A: Dark grey Part B: White	8L (2 x 4L tub)	1
30613028	Part A: Dark grey Part B: Whites	20L (2 x 10L tub)	1

## WATERPROOFING



### Dampfix 3 Two-part water-based acrylic water proofing membrane

BRANZ Appraised, fibre-reinforced water-based acrylic modified cementitious waterproofing membrane. It is fast drying allowing for early tiling with ASA approved adhesives. Internal and external waterproofing including immersed applications such as pools and spas. This two part formulation that is available in a 20kg liquid pail and 20kg powder pail kit.

CODE	COLOUR	SIZE	CARTON
30804119	White	20 L liquid	1
30804460	Grey	20kg powder	1



### Dampfix Gold Water-based polyurethane liquid waterproofing membrane

BRANZ Appraised ASA® Dampfix® Gold is a one-part, highly elastic, Class 3, water-based polyurethane waterproofing membrane system. It is specifically formulated for application on graded substrates that provide positive falls to drainage outlets. This is a 2-coat system applied over primed porous & non-porous substrates.

CODE	COLOUR	SIZE	CARTON
30804399	Yellow	4 L pail	1
30800489	Yellow	15 L pail	1

## CEMENTITIOUS TILE ADHESIVES



### ASA Fixall Designed for use on rigid surfaces

Suitable for domestic tiling. Use with ASA Megalastic to upgrade flexibility and bond strength. For use with ceramic and domestic tiles. Suitable substrates: concrete, screed and render, wall and floor. When used with 100% ASA Megalastic suitable substrates included: fibre cement, plaster board, Dampfix Gold, Dampfix3. Use only on moisture stable porous backed tiles only e.g. ceramic, terracotta. Use with 100% ASA Megalastic when bonding moisture stable non porous tiles such as porcelain, terrazzo, glass or stone.

CODE	COLOUR	SIZE	CARTON
30804123	Grey	20kg bag	1



### ASA Superfixall For use on rigid surfaces

A rigid set, high quality cement-based adhesive suitable for most types of ceramic wall and floor tiles including monocottura, slate, terracotta, quarry tiles. ASA Superfixall is suitable for thin and thick bed applications onto rigid substrates only. To produce a resilient adhesive with improved adhesion, flexural and compressive strength mix with ASA Megalastic as a total water replacement. RATING AS ISO 13007: C1.

CODE	COLOUR	SIZE	CARTON
30804160	Grey	20kg bag	1



### ASA Megafix White wall tile adhesive

A revolutionary polymer modified, white, flexible, powder adhesive recommended for internal thin bed wall and floor applications. Suitable for plasterboard, fibrous cement sheeting, cement render and concrete. Megafix is recommended for applications in bathrooms, toilets, kitchens, laundries and is suitable for most types of tiles. RATING AS ISO 13007: C1S1T.

CODE	COLOUR	SIZE	CARTON
30804161	Brilliant white	20kg bag	1



### ASA Conflex Rubber modified cement-based adhesive

A high strength, flexible, rubber modified, cement-based adhesive used for wall and floor applications. Suitable over concrete, cement render, green screeds, existing tiles, fibrous cement sheeting, plasterboard and ASA/Bostik approved waterproofing membranes. ASA Conflex is recommended for all internal and external applications including bathrooms, toilets, laundries, kitchens, decks and verandas. Suitable for bonding most types of tiles, including porcelain. RATING AS ISO 13007: C2S1E.

CODE	COLOUR	SIZE	CARTON
30804112	Grey	14kg bag	1
30804043	Grey	25kg bag	1



### ASA Conflex Gold Premium wall and floor adhesive

A premium quality product. It is a premium rubber modified tile adhesive designed for demanding or high traffic applications. Excellent all round adhesive with superb bond and overall performance. It is off-white colour. Efflorescence and Moisture Resistant. RATING AS ISO 13007: C2S1ET.

CODE	COLOUR	SIZE	CARTON
30804523	Off-white	20kg bag	1



### ASA Superglue Premium quality white cement-based adhesive

A highly flexible, premium quality, white cement-based adhesive developed to bond most types of ceramic tiles. Ideal for bonding monocottura and fully vitrified tiles, as well as natural stone, marble, granite and mosaic tiles (including glass) onto brickwork, existing tiles, cement render and concrete walls, floors and swimming pools. Suitable for both internal and external applications. RATING AS ISO 13007: C2S2EFT.

CODE	COLOUR	SIZE	CARTON
30604127	White	4kg tub	1
30804132	White	15kg bag	1

## CEMENTITIOUS TILE ADHESIVES contd



### RapidSet For commercial and high traffic tiling

A fast setting white and/or grey adhesive with long pot life, good workability and excellent strength. Commercial and high traffic tiling can be done at a normal pace but with very fast return to service. Use with Megalastic to upgrade flexibility and water resistance but maintain long open time and workability. For use with light coloured natural stone (marble). RATING AS ISO 13007: C2FT.

CODE	COLOUR	SIZE	CARTON
30804673	White	20kg	1
30603537	Grey	20kg	1



### ASA Asaflex Ceramic tile adhesive

A two component, flexible adhesive suitable for most ceramic tile installations including tiling on timber and is also ideal for areas of movement, vibration or temperature fluctuation. Asaflex has anti-fracture properties reducing the likelihood of tile cracking due to existing cracks in the substrates. RATING AS ISO 13007: C2S2E.

CODE	COLOUR	SIZE	CARTON
30804463	White	4 L pail	1
30608706	White	15 L pail	1
30804120	Grey	8kg bag	1
30804121	Grey	30kg bag	1

## TIMBER FLOORING ADHESIVES



### MS Flooring Adhesives

#### Ultraset 3 in 1 Advanced MS tri-linking flooring adhesive

Extremely low moisture vapour permeability. Can bridge gaps up to 3mm. Superior sound control, typically outperforming 6mm cork underlay. Includes Thickness Control Spacer Technology which maintains the adhesive thickness between flooring and substrate. Suitable for concrete, terrazzo, ceramic floor, well bonded vinyl sheets, timber, plywood and cement backer. Adheres parquet, cork, solid strip softwood, hardwood flooring, engineered and bamboo flooring.

CODE	COLOUR	SIZE	CARTON
30615274	White	26kg tub	1





### **Ultraset HP** High performance MS polymer timber flooring adhesive (*indent*)

One part solvent and isocyanate-free MS polymer based elastomeric adhesive, formulated to adhere most types of timber flooring systems. Suitable for interior surfaces; residential, commercial and industrial applications. No mixing, ready to use; it is easy to spread while maintaining stable peaks. Will not re-emulsify when in contact with moisture. Remains flexible after full cure. Excellent initial grab and final bond strength. Suitable over radiant heating.

CODE	COLOUR	SIZE	CARTON
30840416	Brown	16kg tub	1

### **PU Timber Floor Adhesives**



### **Ultraset SF** Solvent-free hardwood adhesive

Solvent-free, polyurethane elastomeric adhesive formulated to adhere most types of hardwood floors. Suitable for adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system. Adheres parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete or timber substrates. Zero VOC, Green Build. Endorsed by ATFA.

CODE	COLOUR	SIZE	CARTON
30804431	Brown	600 mL sausage	20
30604590	Brown	16kg pail	1



### **Ultraset DX** Quick setting polyurethane adhesive

A high-strength adhesive for bonding timber flooring to timber and concrete substrates. Single pack, semi rigid, controlled foaming, quick set, moisture cured polyurethane adhesive. When fully cured, this adhesive provides a very strong bond with excellent resistance to water. Designed for bonding porous or non-porous substrates. Expands to fill minor voids in uneven surfaces with good wet grab and initial bond. Good economical coverage up to 22m<sup>2</sup>/tub.

CODE	COLOUR	SIZE	CARTON
308404677	Brown	16kg tub	1

### **Approved for use with Laminex Strandfloor**



### **Alpha Grip** 1 hour cure foaming PU construction adhesive

Solvent-free, thixotropic, quick setting, moisture-cured D4 polyurethane adhesive. Alpha Grip is stronger than wood after one hour – when fully cured has an extremely strong bond with excellent resistance to water, weathering, ageing and marine conditions. Foams slightly to fill gaps and cracks. Tested and approved for use with Laminex Strandfloor. Certified to EN204 D4. Ideal for flooring and general construction and for bonding porous to non-porous substrates.

CODE	COLOUR	SIZE	CARTON
30609963	Bright Cream	310 mL cartridge	20

## TILING GROUT & SILICONE



### ASA Sanded Quarry Grout Cementitious grout

A cement-based grout especially suited for wide joints from 5mm to 20mm. Exterior rated.  
RATING AS ISO 13007: CG2.

CODE	COLOUR	SIZE	CARTON
30804145	Grey	20kg bag	1



### ASA White Smooth Grout Grout

A smooth brilliant white grout. Suitable for Interior wall applications with grout joints from 1.5mm-3mm.  
RATING AS ISO 13007: CG1.

CODE	COLOUR	SIZE	CARTON
30840383	White	4kg bag	1
30605658	White	20kg bag	1



### ASA Designer Grout Mould-resistant grout

A sterilised, mould-resistant grouting suitable for wall and floor applications with grout joints from 1.5mm to 15mm. Interior and exterior. RATING AS ISO 13007: CG2WA.

CODE	COLOUR	SIZE	CARTON
30604367	210 Antq White	4kg bag	1
30604370	220 Moleskin White	4kg bag	1
30604372	310 Buff	4kg bag	1
30604376	410 Slv Gris	4kg bag	1
30604373	410 Slv Gris	20kg bag	1
30604379	420 Qld Grey	4kg bag	1
30604377	420 Qld Grey	20kg bag	1
30604382	440 Dlorn Grey	4kg bag	1
30604380	440 Dlorn Grey	20kg bag	1
30604682	520 Coffee	4kg bag	1
30604386	810 Pwt	4kg bag	1
30604384	810 Pwt	20kg bag	1
30604389	820 Charcoal	4kg bag	1
30604387	820 Charcoal	20kg bag	1



### ASA Coloured Silicone Neutral cure silicone

A permanently flexible, neutral cure silicone which has been developed to complement the ASA Coloured Grout range. Ideal for use as an expansion joint filler and general finishing for applications in bathrooms, kitchens, laundries, showers, entrance ways etc.

CODE	COLOUR	SIZE	CARTON
30610189	Charcoal	300 mL cartridge	20
30610187	Mid-Grey	300 mL cartridge	20
30610186	Pwt	300 mL cartridge	20
30610185	Silver Ash	300 mL cartridge	20
30610159	Titanium	300 mL cartridge	20



### Kitchen & Bathroom Silicone Mould-resistant, premium 100% silicone sealant

Provides a permanently flexible waterproof seal. Designed for sealing joints in wet and damp areas where resistance to the growth of mould and fungus is important. Neutral cure and non-corrosive. Ideal for kitchen and bathroom fixtures, glass, fibreglass and glazed ceramic tiles, vitreous enamel and most laminated surfaces. Also available in an acetic cure (white only).

CODE	COLOUR	SIZE	CARTON
NEUTRAL CURE			
30804716	White	300 mL cartridge	20
30804233	Translucent	300 mL cartridge	20
ACETIC CURE			
30804571	White	300 mL cartridge	20

## ACCESSORIES



### AXIOS Trowel 6.35mm V-notch trowel

Recommended trowel for the Bostik AXIOS range of timber flooring adhesives.

CODE	COLOUR	SIZE	CARTON
30609361	N/A	280mm x 115mm	1

## ACOUSTIC SYSTEM – TIMBER FLOORING



### Bostik Acoustic Sealant Water-based acoustic isolation sealant

Bostik Acoustic Sealant is a water-based, high solids, permanently flexible and dense sealant designed for acoustic isolation.

CODE	COLOUR	SIZE	CARTON
30804213	White	600 mL sausage	1



### Ultraset SF Solvent-free hardwood adhesive

Solvent-free, polyurethane elastomeric adhesive formulated to adhere most types of hardwood floors. Suitable for adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system. Adheres parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete or timber substrate. Zero VOC. Endorsed by ATFA.

CODE	COLOUR	SIZE	CARTON
30840110	Brown	600 mL sausage	20
30604590	Brown	16kg pail	1



### Ultraset 3 in 1 Advanced MS tri-linking flooring adhesive

Extremely low moisture vapour permeability. Can bridge gaps up to 3mm. Superior sound control, typically outperforming 6mm cork underlay. Includes Thickness Control Spacer Technology which maintains the adhesive thickness between flooring and substrate. Suitable for concrete, terrazzo, ceramic floor, well bonded vinyl sheets, timber, plywood and cement backer. Adheres parquet, cork, solid strip softwood, hardwood flooring, engineered and bamboo flooring.

CODE	COLOUR	SIZE	CARTON
30615274	White	26kg tub	1



### ASA Asaphonic Mat Acoustic matting

Asaphonic Mat is a preformed sheet of graded rubber particles bound together by a polyurethane binder. It provides a sound absorbing layer for covering concrete floors where impact noise isolation is required. It may be used for indoor or outdoor installations. Typical applications are unit blocks (including bathrooms, laundries and living areas), external decks and balcony areas.

CODE	COLOUR	THICKNESS	CARTON
30804360	Black	5mm	1
30609001	Black	10mm	1



## ACOUSTIC SYSTEM - TILING

### Ultraset SF Solvent-free hardwood adhesive

Solvent-free, polyurethane elastomeric adhesive formulated to adhere most types of hardwood floors. Suitable for adhering recommended acoustic underlays as an intermediate layer between subfloor and flooring system. Adheres parquet, solid strip softwood and hardwood flooring, engineered flooring and bamboo flooring to concrete or timber substrate. Zero VOC. Endorsed by ATFA.

CODE	COLOUR	SIZE	CARTON
30840110	Brown	600 mL sausage	20
30604590	Brown	16kg pail	1



### ASA Asaphonic Mat Acoustic matting

Asaphonic Mat is a preformed sheet of graded rubber particles bound together by a polyurethane binder. It provides a sound absorbing layer for covering concrete floors where impact noise isolation is required. It may be used for indoor or outdoor installations. Typical applications are unit blocks (including bathrooms, laundries and living areas), external decks and balcony areas.

CODE	COLOUR	THICKNESS	CARTON
30804360	Black	5mm	1
30609001	Black	10mm	1



### Dampfix Gold Water-based polyurethane liquid waterproofing membrane

BRANZ Appraised ASA® Dampfix® Gold is a one-part, highly elastic, Class 3, water-based polyurethane waterproofing membrane system. It is specifically formulated for application on graded substrates that provide positive falls to drainage outlets. This is a 2-coat system applied over primed porous & non-porous substrates.

CODE	COLOUR	SIZE	CARTON
30804399	Yellow	4 L pail	1
30800489	Yellow	15 L pail	1



### ASA Asaflex Ceramic tile adhesive

A two component, flexible adhesive suitable for most ceramic tile installations including tiling on timber and is also ideal for areas of movement, vibration or temperature fluctuation. Asaflex has anti-fracture properties reducing the likelihood of tile cracking due to existing cracks in the substrates. RATING AS ISO 13007: C2S2E.

CODE	COLOUR	SIZE	CARTON
30804463	White	4 L pail	1
30608706	White	15 L pail	1
30804120	Grey	8kg bag	1
30804121	Grey	30kg bag	1







20 horizontal lines for writing.







Smart help  
0508 222 272

FEB 2022

**Bostik NZ Ltd**

**WELLINGTON**

19 Eastern Hutt Rd, Wingate 5019  
Lower Hutt, New Zealand  
Phone: +64 4 567 5119  
Fax: +64 4 567 3776

**AUCKLAND**

148 Pavilion Drive  
Airport Oaks, Auckland 2022  
Phone: +64 9 257 5847  
Fax: +64 9 257 3589

**bostik.co.nz**